



Environmental Product Declaration

In accordance with ISO 14025:2006 and EN 14804:2012

Hot rolled steel-plate

Programme:	The International EPD® System www.environdec.com
EPD registered through the fully aligned regional programme/hub:	EPD Latin America, www.epd-latinamerica.com
Programme operator:	EPD International AB
Regional Hub:	EPD Latin America
EPD registration number:	S-P-01420
Issue date:	2019-01-30
Validity date:	2024-01-22
	An EPD should provide current information and may be updated if conditions change. The stated validity is therefore subject to the continued registration and publication at www.environdec.com
Revision date:	2019-01-23
Geographical scope:	Mexico

EPD Content

1	Altos Hornos de México (AHMSA).....	3
2	General information.....	4
3	Product description.....	5
3.1	Technical specifications.....	6
4	Content declaration.....	7
5	LCA Rules.....	8
5.1	Declared unit.....	8
5.2	System boundary.....	8
5.3	Description of the manufacturing process.....	9
5.4	Assumptions.....	10
5.5	Cut-off criteria.....	10
5.6	Allocation.....	11
5.7	Time representativeness.....	11
5.8	Data quality assessment.....	11
6	Environmental performance.....	13
6.1	Use of resources.....	13
6.2	Potential environmental impact.....	14
6.3	Waste production.....	15
7	Additional information.....	16
8	Verification and registration.....	17
9	Contact information.....	18
10	References.....	18

Altos Hornos de México (AHMSA) is the largest integrated steelworks in the country. Its corporate offices are in central region of the State of Coahuila, in the city of Monclova, 250 kilometers from the U.S. border.

AHMSA operates a vast industrial chain, from the extraction of iron ore and coal to the manufacturing of various steels. AHMSA has two steel plants in the city of Monclova, which cover an area of 3 000 hectares.

AHMSA currently produces approximately 5 million metric tons of liquid steel annually, and has a workforce of 19 000 employees, including its mining subsidiaries.



AHMSA is a national leader in production and marketing of steel flat products: hot rolled coil, wide plate in coils or sheets, cold rolled coil, tinplate and tin-free steel. Furthermore, it has production lines for structural shapes for the construction industry.

AHMSA supplies plate and hot rolled strip in different grades and specifications for various applications in the automotive and construction industries. These products are also used to manufacture heavy machinery, tubing, structures and pressure vessels,



among others. AHMSA is the only steel wide plate manufacturer in the country, also it is the only producer of tin-free steel and the main producer of tinplate and largest structural shapes manufacturer in Mexico.

AHMSA manages, collects and operates waste disposal through pro-cleaning patronage in municipalities of the State of Coahuila (Monclova, Frontera, Castaños, San Buenaventura and Nadadores). Sanitary landfill is operated by AHMSA which has 50 Ha and AHMSA has donated equipment to this sanitary landfill.

AHMSA operates the wastewater treatment plant of the city, which treats 640 liters per second. Treated water is supplied to AHMSA's process, in order to decrease water extraction.

AHMSA and the Government of the State of Coahuila as part of the culture and social recreation programme.

This Environmental Product Declaration (EPD) is in accordance with ISO 14025 and EN 15804, for hot rolled steel-plate.

EPD of constructions products may not be comparable if they do not comply with EN 15804 Sustainability of constructions works – Environmental product declarations – Core rules for product category of construction products.

Environmental product declarations within the same product category from different programs may not be comparable.

2. General information

Product:	Hot rolled steel-plate
Declaration owner:	Altos Hornos de México S.A.B. de C.V. Prolongación Juárez S/N, Col. La Loma. Monclova, Coahuila, México. C.P. 25770. Contact person: Oscar Abrego Rodriguez. oabregor@gan.com.mx
Description of the construction product:	Steel plate is supplied directly from the hot-rolling mill or with cut edge and is available in thicknesses from 0.312" (7.92 mm) to more than 2" (50.8 mm) with widths from 56" (1 422.4 mm) up to 120" (3 048 mm). For widths greater than 96" (2 438 mm), plate can be produced to a maximum weight of 10 metric tons or a length of 630" (16 m).
Declared Unit:	1 metric ton of hot rolled steel-plate
Construction product identification:	Central Product Classification: CPC 4121 Flat-rolled products of steel, not further worked than hot-rolled
Description of the main product components and or materials:	Low, medium and high carbon steel.
Life cycle stages not considered:	Distribution, use, end of life.
Content of the declaration:	This EPD is based on information modules that do not cover the aspects of use and end of life of the product. It contains in detail, for modules A1, A2 and A3: <ul style="list-style-type: none"> •Product definition and physical data. •Information about raw materials and origin. •Specifications on manufacturing the product. •Notes on product processing. •LCA based on a declared unit, cradle-to-gate. •LCA results. •Evidence and verifications.
For more information consult:	www.ahmsa.com
Site for which this EPD is representative:	Manufacturing Plant: Prolongación Juárez S/N, Col. La Loma. Monclova, Coahuila, México. C.P. 25770
Public intended:	B2B (Business to Business)

3. Product description

Hot rolled steel-plate is a sheet steel supplied directly from the hot-rolling mill or with cut edge and is available in thicknesses from 0.312" (7.92 mm) to more than 2" (50.8 mm) with widths from 56" (1 422.4 mm) up to 120" (3 048 mm). For widths greater than 96" (2 438 mm), plate can be produced to a maximum weight of 10 metric tons or a length of 630" (16 m).

AHMSA supplies plate in different grades and specifications for various applications for the main industrial sectors.



Uses

- Automotive industry.
- Construction industry.
- Heavy machinery.



3.1. Technical specifications

Different specifications and applications of hot rolled steel-plate are shown in Table 1.

SAE Steel Classification	
Specification	Description & Application
SAE J403 1010 & 1012	Low-carbon steel for manufacturing profiles, welded pipe.
SAE J403 1015, 1018, 1020, 1022, 1025, 1030, 1035 & 1040	Medium-carbon steel for manufacturing structural parts, machinery and tools
SAE J403 1045, 1050, 1055 & 1060.	High-carbon steel for machine parts and agricultural implements
SAE J403 1552	High-manganese wear-resistant steel for hardened parts, blades and bits
SAE J1268 15B21 AHM 130-B	Boron wear-resistant steel for hardened parts, agricultural implements and plow discs
Low, Medium & High-Strength Structural Steel	
Specification	Description & Application
ASTM A-283-A, B, C	Low and medium-strength structural steel with high-weldability
ASTM A-36	Medium-strength structural steel for welded beams column bases
ABS A, B, D, E LLOYD'S A, B, D, E ASTM A-131-A, B, D, E	Medium-strength structural steel for ship building
DIN EN 10025 S-235	Structural steel with moderate and high-weldability
DIN EN 10025 S-275	Medium-strength structural steel for welded beams, column bases
DIN EN 10025 S-355	High-strength steel for welded beams, bridges, buildings
ASTM A-572 Gr. 50, 55, 60 & 65	High-strength low-alloy steel for welded girders, bridges, buildings, utility pole bases
ASTM A-656 Gr. 50 to 80	High-strength structural steel for welded beams
ASTM A-656 Gr. 100	Ultra-high-strength structural steel for welded beams, where reduced weight is required
ASTM A-709 Gr. 50 & 70	High-strength low-alloy steel for bridges
ASTM A-709 Gr. 100	Ultra-high-strength structural steel for welded beams, where reduced weight is required
JIS G-3106 SM-490-A	High-strength low-alloy steel with high-weldability for bridges, oil tankers

Table 1. Steel specifications & application of hot rolled steel-plate

The specifications for pressure vessel steel and pipeline, casing and support steel are shown in Table 2.

Pressure vessel Steel	
Specification	Description & Application
ASTM/ASME SA-285-C	Low and medium-strength steel for stationary vessels
ASTM/ASME SA-455	High-strength steel for stationary vessels
ASTM/ASME SA-516, 55, 60, 65 y 70	Low and medium-temperature vessels
NMX B-475	Spherical pressure vessels
ASTM/ASME SA-612	Railroad tanker cars
AAR TC-128-B	
Pipeline, casing and support steel	
Specification	Description & Application
API 5L B & X-42	Medium-strength pipeline
API 5L X-46 to X-80	High-strength pipeline
API 5L X-100	Ultra-high-Strength pipeline
API X-52, 60 & 65	High-Strength sour gas pipe
API 2H 50	Structural tubing for marine platforms

Table 2. Steel specifications for pressure vessel & pipeline, casing and support steel

4. Content declaration

Hot rolled steel-plate manufactured by AHMSA is made of 100% low alloyed steel manufactured with iron ore and 80% of recycled material. Typical composition of the low alloyed is presented in Table 3.

Components	% Weight
Iron (Fe)	99.8 – 96.1
Manganeso (Mn)	0.15 – 1.70
Carbon (C)	0.02 – 0.94
Chromium (Cr)	0.025 – 0.60
Nickel (Ni)	0.02 – 0.30
Silicon (Si)	0.01 – 0.35



Table 3. Typical composition of hot rolled steel-plate by AHMSA

5. LCA Rules

Environmental potential impacts were calculated according to EN 15804:2012 and PCR 2012:01 Construction products and construction services Version 2.2 (2017-05-30). This EPD is in accordance with ISO 14025:2006.

Environmental potential impacts were calculated through Life Cycle Assessment (LCA) methodology according to ISO 14040:2006 and ISO 14044:2006. An external third-party critical review process of the LCA was conducted according to ISO/TS 14071:2014.

5.1. Declared unit

One metric ton of hot rolled steel-plate.

5.2. System boundary

This is a cradle to gate EPD. The following life cycle stages were considered:

A1 – Raw materials supply.

A2 – Transport.

A3 – Manufacturing.

Description of the system boundary is presented in Table 4.

Life cycle environmental information of hot rolled steel-plate							Other environmental information
Product stage			Construction process stage		Use stage	End of life stage	Reuse recovery stage
A1	A2	A3	A4	A5	B1 - B7	C1 - C4	D
Raw materials supply	Transport	Manufacturing	Transport	Construction installation	Use Maintenance Repair Replacement Refurbishment Operational energy use Operational water use	De-construction demolition Transport Waste processing Disposal	Reuse – recovery – recycling potential
X	X	X	MND	MND	MND	MND	MND

(X = included in LCA; MND = Module Not Declared)

Table 4. Hot rolled steel-plate manufactured by AHMSA product system



A1) Raw materials supply

Raw materials production: coal, iron ore, iron pellets, sinter, coke, fluxes, ferroalloys, briquettes.

Raw materials packaging production.

Generation and distribution of national electricity.

AHMSA's electricity generation and distribution.

Extraction and distribution of fuels.



A2) Transportation

Raw materials transportation.

Auxiliary materials transportation.

Packaging materials transportation.

Fuels transportation.

Internal transportation requirements.



A3) Manufacturing

Water consumption.

Production and consumption of auxiliary materials: oxygen, nitrogen, textiles for cleaning and maintenance, lubricating oils.

Waste generation and waste management processes.

Air emissions.

Wastewater generation.

Transport of waste to the treatment and final disposal site.

Table 5. Description of information modules included in this EPD

5.3. Description of the manufacturing process

Steel production process is shown in Figure 1.



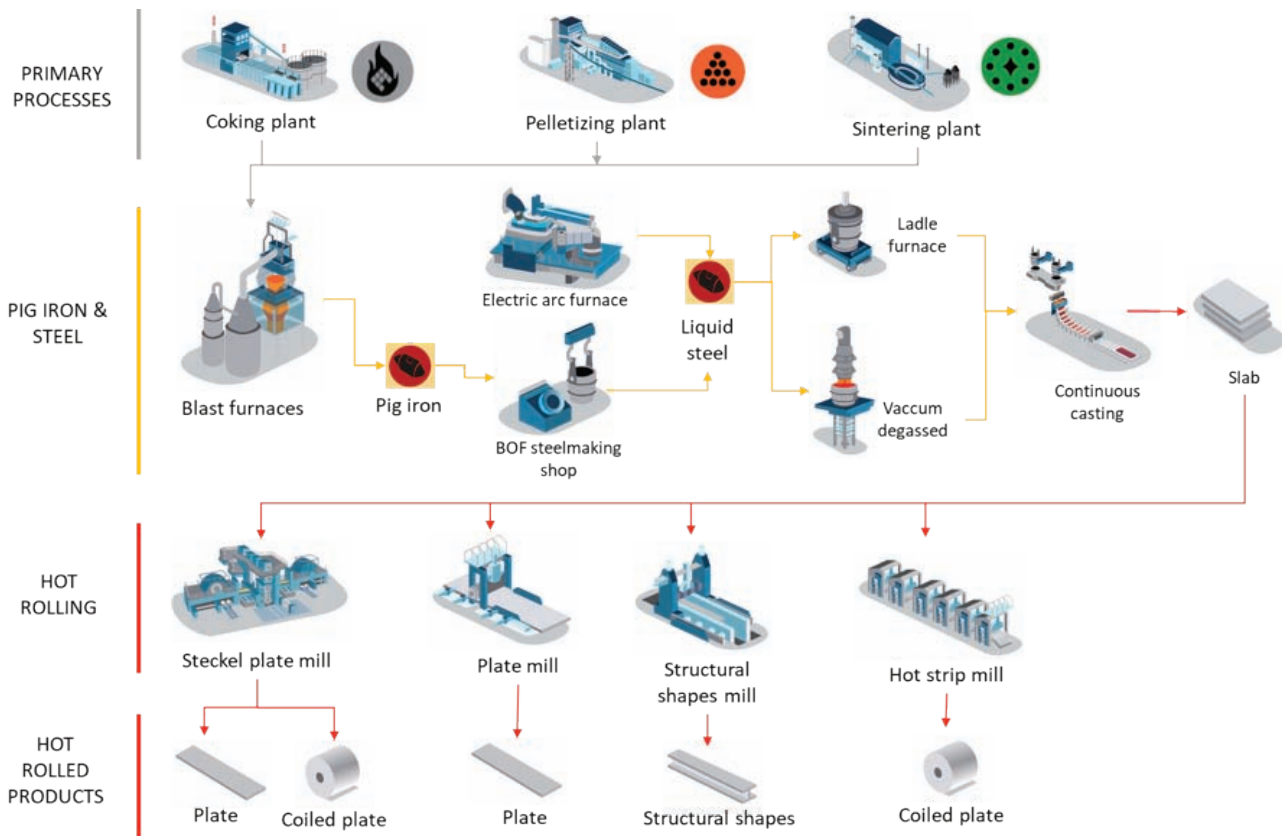


Figure. 1. Flow diagram of hot rolled steel-plate manufacturing process

5.4. Assumptions

- Distance of internal terrestrial transportation is 10 km.
- Transportation distance of textiles for cleaning and oil for maintenance is 14.2 km.
- Textiles for cleaning and maintenance absorb 55% of its weight, once it meets the oil.
- Textiles for cleaning and maintenance and lubricating oils are hazardous waste at the end of process.
- Transportation of coke gas and blast furnace gas is by pipeline.
- Transportation distance of oxygen, nitrogen and argon is 10 km.

5.5. Cut-off criteria

A minimum of 95% of the total flows (matter and energy) in modules A1 and A3 modules were included. Company infrastructure, employee's transportation and administrative activities were kept out of the scope of this study.

5.6. Allocation

Allocation of inputs and outputs of the system between product and coproducts was based on a mass relation, considering the quantity produced per year of each product and coproduct at the level of unit process.

Table 6 shows the coproducts generated during hot rolled steel-plate manufacturing.

Unit process	Coproduct
Coking plant	Coke gas
Sinter plant	Scrap
Blast furnace	Slag
Electric arc furnace	Blas furnace gas Slag
Hot rolling	Scrap

Table 6. Coproduct generated in hot rolled steel-plate manufacturing

The polluter pays principle was applied for the allocation procedure during recycling. In this way, in each case when there was an input of secondary material to the hot rolled steel-plate product system, recycling process and transportation to the site were included in life cycle inventory (for example, steel scrap). In those cases, in which output of material to recycling were presented, material transportation to recycling plant was included. This principle was applied to plastic, board and metal recycled by a third party.

For generic data Mexicaniuh and Ecoinvent 3.3 (Allocation - Recycled Content version) databases were used.

5.7. Time representativeness

Direct data obtained from AHMSA is representative for 2016.

5.8. Data quality assessment

Data quality assessment per module is provided in Tables 7, 8 and 9.

Table 7. Raw material supply module data quality assessment

Data	Time related coverage	Geographic coverage	Technological coverage	Data source	Measured or estimated
Raw materials consumption	2016	Mexico	Modern	AHMSA	M
Raw materials production of primary processes	2016	Mexico	Modern	AHMSA	M
Raw materials production of pig iron & steel and hot rolling	1990-2016	World average based on Europe	World average based on Europe	Ecoinvent 3.3	M&E
Fuels consumption and emissions related to electricity generation and distribution in Mexico	2016	Mexico	Mexican energy mix	Mexicaniah	M&E
Fuels consumption and emissions related to AHMSA's electricity generation and distribution	2016	Mexico	Modern	Mexicaniah & AHMSA	M&E
Energy consumption and generation of emissions related to natural gas production in Mexico	2016	Mexico	Mexican context	Mexicaniah	M&E

M&E: Measured and Estimated, M: Measured, E: Estimated

Table 8. Transportation module data quality assessment

Data	Time related coverage	Geographic coverage	Technological coverage	Data source	Measured or estimated
Transport distance of raw materials, auxiliary supplies, fuels & packaging materials	2016	Mexico	N/A	AHMSA	M
Transportation of raw materials, auxiliary supplies, fuels & packaging materials	1992-2014	World average based on Europe	World average based on Europe	Ecoinvent 3.3	M&E
Consumption of materials and energy and emissions related to the transport requirements of raw materials and auxiliary inputs	1992-2014	World average based on Europe	World average based on Europe	Ecoinvent 3.3	M&E
Consumption of materials and energy and emissions related to internal transport requirements	2016	Mexico	N/A	AHMSA	M&E

M&E: Measured and Estimated, M: Measured, E: Estimated



Table 9. Manufacture module data quality assessment

Data	Time related coverage	Geographic coverage	Technological coverage	Data source	Measured or estimated
Water consumption	2016	Mexico	Modern	AHMSA	M
Consumption of auxiliary supplies during manufacturing	2016	Mexico	Modern	AHMSA	M
Consumption of energy and materials for the manufacture of auxiliary materials	1990 - 2016	Worldwide average based on Europe	Worldwide average based on Europe	Ecoinvent 3.3	M&E
Packaging materials production for raw materials & auxiliary supplies	1990-2016	World average based on Europe	World average based on Europe	Ecoinvent 3.3	M&E
Waste generation	2016	Mexico	Modern	AHMSA	M
Processes of waste treatment, consumptions of materials and related energy	1990 - 2017	Worldwide average based on Europe	Worldwide average based on Europe	Ecoinvent 3.3	M&E
Air emissions and wastewater generation	2016	Mexico	Modern	AHMSA	M
Waste transportation to the treatment & final disposal site	2016	Mexico	Modern	AHMSA	M
Consumption of materials and energy and emissions related to waste transport requirements	1992-2014	Worldwide average based on Europe	Worldwide average based on Europe	Ecoinvent 3.3	M&E

M&E: Measured and Estimated, M: Measured, E: Estimated

6. Environmental performance

SimaPro 8.4 was used for Life Cycle Impact Assessment

6.1. Use of resources

Parameters describing resource use were evaluated with the Cumulated Energy Demand method version 1.09 (Frischknecht et al. 2007) except for the indicator of use of net fresh water that was evaluated with Recipe 2016 Midpoint (H) version 1.00 (Huijbregts et al. 2017). The detailed description of the use of resources is provided in Table 10.

Table 10. Resource Indicators per metric ton of hot rolled steel-plate

Parameter	Unit	A1) Raw materials supply	A2) Transportation	A3) Manufacturing	Total A1 - A3	A4 - A5, B1-B7, C1-C4, D
Use of renewable primary energy excluding renewable primary energy resources used as raw materials	MJ	657	36	1 276	1 969	Modules not declared
Use of renewable primary energy as raw materials	MJ	0	0	0	0	
Total use of renewable primary energy resources	MJ	657	36	1 276	1 969	
Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials	MJ	43 496	1 382	7 478	52 356	
Use of non-renewable primary energy used as raw materials	MJ	0	0	0	0	
Total use of non-renewable primary energy resources	MJ	43 496	1 382	7 478	52 356	
Use of secondary material	kg	0	0	0	0	
Use of renewable secondary fuels	MJ	0	0	0	0	
Use of non-renewable secondary fuels	MJ	0	0	0	0	
Use of net fresh water	m ³	10 777	0	20	10 797	

6.2. Potential environmental impact

Parameters describing environmental potential impacts were calculated using CML-IA method version 3.04 (Guinee et al. 2001; Huijbregts et al. 2003; Wegener et al. 2008) as implemented in SimaPro 8.4. Water scarcity potential was calculated using AWARE method (Boulay et al. 2018). Table 11 shows the LCA results per declared unit and Figure 2 depicts the impact contribution per module.

Table 11. Potential environmental impact indicators per metric ton of hot rolled steel-plate

Impact Category	Unit	A1) Raw materials supply	A2) Transportation	A3) Manufacturing	Total A1 - A3	A4 - A5, B1-B7, C1-C4, D
Abiotic depletion	kg Sb equiv	9.33E-03	1.46E-04	7.70E-04	1.02E-02	Modules not declared
	%	91	1	8	100	
Abiotic depletion (fossil fuels)	MJ	43 157	1 342	6 789	51 288	
	%	84	3	13	100	
Global warming (GWP100a)	kg CO ₂ equiv	1 178	94	613	1 885	
	%	62	5	33	100	
Ozone layer depletion (ODP)	kg CFC-11 equiv	1.49E-04	1.87E-05	3.02E-05	1.98E-04	
	%	75.4	9.4	15.2	100	
Photochemical oxidation	kg C ₂ H ₄ eq	0.70	0.03	0.32	1.06	
	%	66.7	2.6	30.7	100	
Acidification	kg SO ₂ equiv	10.97	0.77	5.16	16.91	
	%	64.9	4.5	30.5	100	
Eutrophication	kg PO ₄ ⁻⁻⁻ eq	3.53	0.15	1.87	5.55	
	%	63.6	2.7	33.7	100	
Water scarcity potential	m ³ eq	347 482	27	2 019	349 528	
	%	99	0	1	100	

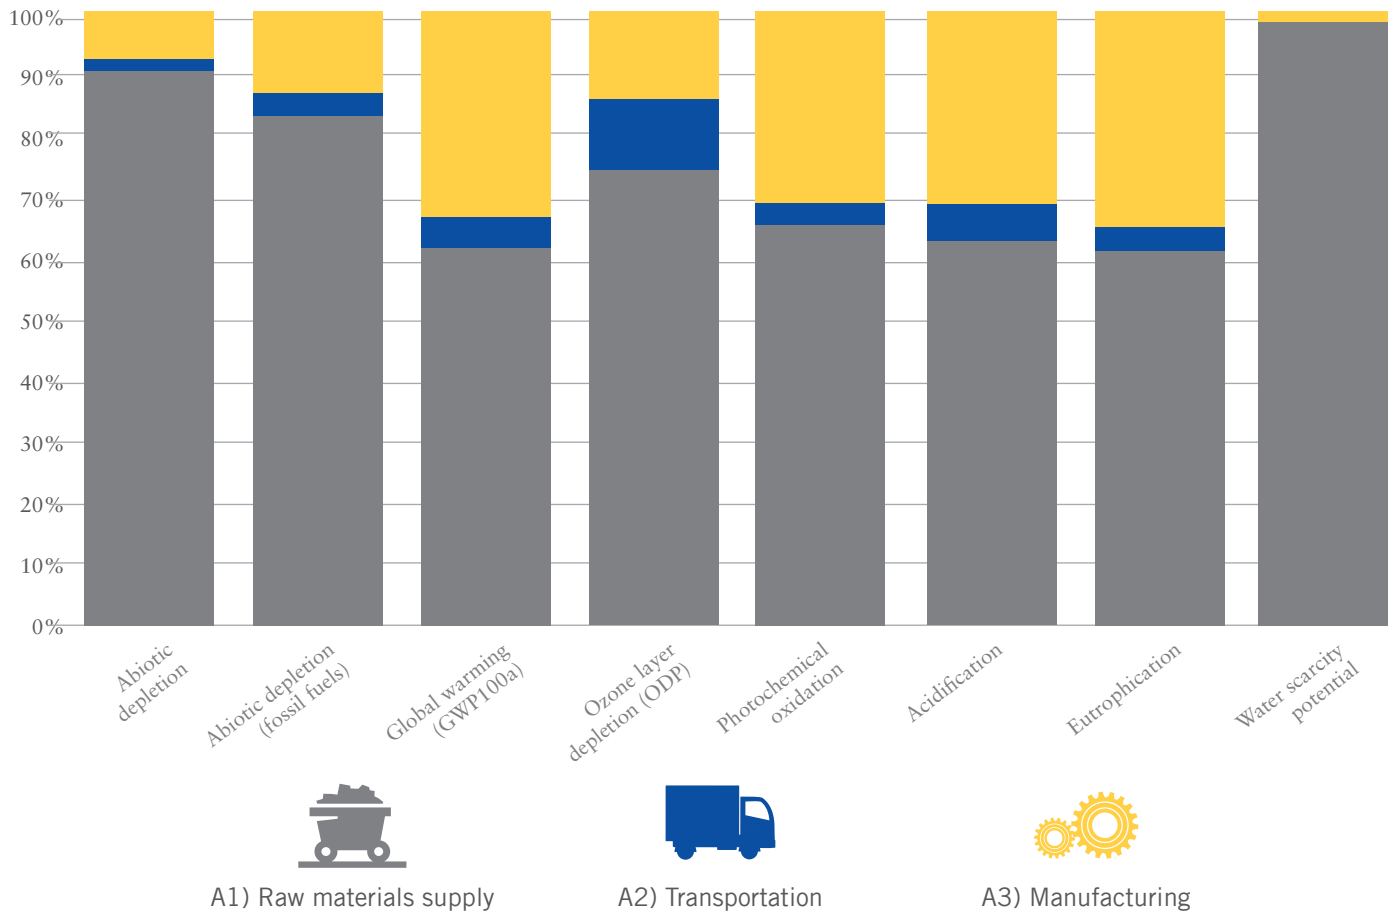


Figure. 2 Potential environmental impact contribution per metric ton of hot rolled steel-plate

6.3. Waste production

Environmental indicators describing waste generation were obtained from LCI except for background information which has been calculated using EDIP 2003 method (Hauschild and Potting, 2005). Table 12 shows waste and other outputs generated during each information module.

Output parameter	Unit	A1) Raw materials supply	A2) Transportation	A3) Manufacturing	Total A1 - A3	A4 - A5, B1-B7, C1-C4, D
Hazardous waste	kg	8.56E-02	1.05E-03	861	861	Modules not declared
Non hazardous waste	kg	57.5	36.2	36.2	129.9	
Radioactive waste*	kg	2.18E-02	8.08E-03	1.67E-02	4.65E-02	
Components for reuse	kg	0	0	0	0	
Materials for recycling	kg	0	0	0	0	
Materials for energy recovery	kg	0	0	0	0	
Exported electricity	MJ	0	0	0	0	
Exported heat	MJ	0	0	0	0	

*No radioactive waste is produced during AHMSA operation.

7. Additional information

AHMSA has the following certifications:

- The first steel company certified in ISO 14001 in Latin America, since 1996.
- ISO 9001:2008 to hot rolling manufacturing process of steel plate & stripe.
- ISO/TS 16949:2009 Quality management systems — Particular requirements for the application of ISO 9001:2008 for automotive production and relevant service part organizations.
- Clean Industry under Federal Attorney's Office for Environmental Protection (PROFEPA).

AHMSA has the following awards:

- Millenium Bussiness Award for Environmental Achievement given by UN Environment and the International Chamber of Commerce in 2000.
- 1st place for reducing CO₂ emissions in the Environmental Leadership for Competitiveness Program by Federal Attorney's Office for Environmental Protection (PROFEPA) in 2012.
- 2nd place for saving water in the Environmental Leadership for Competitiveness Program given by Federal Attorney's Office for Environmental Protection (PROFEPA) in 2012.
- Leading company in the Environmental Leadership for Competitiveness Program given by Federal Attorney's Office for Environmental Protection (PROFEPA) in 2016.

Biodiversity

AHMSA and subsidiaries create and manage five environmental units for wildlife protection, with more than 100 thousand hectares. Different species of animals are preserved, like white-tail deer, moose, bighorn sheep, black bear, among others.



AHMSA and subsidiaries supply goats and cattle to people of regions: coal, central and northern of the State. AHMSA also support to genetic refinement program for cattle, orchards of pomegranates, nogalera, oats, melon, cucumber, chard, corn, among others.

AHMSA manages and operates the municipal zoo with species such as: African lion, tiger, puma, lynx, black bear, American wolf, diverse species in birds, among others.

Afforestation activities

AHMSA and subsidiaries built and operate three nurseries where trees from the region are grew. These nurseries have a production capacity of 370 thousand plants per year. AHMSA donates trees to schools as well as municipal and state institutions.

8. Verification and registration

Programme:	International EPD® System www.environdec.com	
	EPD registered through the fully aligned regional programme/hub: EPD Latin America www.epd-americalatina.com	
Programme operator:	EPD International AB / Box 210 60 / SE-100 31 Stockholm, Sweden	
	EPD Latin America / Chile: Alonso de Ercilla 2996, Ñuñoa, Santiago Chile. Mexico: Av. Convento de Actopan 24 Int. 7A, Colonia Jardines de Santa Mónica, Tlalnepantla de Baz, Estado de México, México, C.P. 54050	
EPD registration number:	S-P-01420	
Date of publication (issue):	2019-01-30	
Date of validity:	2024-01-22	
Date of revision:	2019-01-23	
Reference year of data:	2016	
Geographical scope:	Mexico	
PCR:	PCR 2012:01 construction products and construction services, Version 2.2 (2017-05-03)	
PCR review was conducted by:	The Technical Committee of the International EPD® System. Chair: Massimo Marino. Contact via info@environdec.com	
Independent verification of the declaration data, according to ISO 14025:2006.	EPD process certification (Internal) <input type="checkbox"/> EPD verification (External) <input checked="" type="checkbox"/>	
External third-party verifier and critical reviewer of the LCA:	Claudia A. Peña ADDERE Research & Technology Approved EPD verifier cpena@addere.cl , claudia@epd-americalatina.com	
Accredited or approved by:	The International EPD® System	

9. Contact information

EPD owner:



Altos Hornos de México
S.A.B. de C.V.

Prolongación Juárez S/N,
Col. La Loma, Monclova,
Coahuila, México.
C.P. 25770
www.ahmsa.com

Contact person:
Oscar Abrego Rodriguez
oabregor@gan.com.mx

LCA author



Center for Life Cycle Assessment
and Sustainable Design – CADIS

Bosques De Bohemia 2 No. 9,
Bosques del Lago.
Cuautitlán Izcalli, Estado de
México, México.
C.P. 54766
www.centroacv.mx

Contact person:
Juan Pablo Chargoy
jpchargoy@centroacv.mx

Programme operator (PO):



EPD International AB

Box 210 60, SE-100 31,
Stockholm, Sweden.
www.environdec.com

info@environdec.com

EPD registered through the
fully aligned regional
programme/hub:



EPD Latin America
www.epd-latinamerica.com

Chile:
Alonso de Ercilla 2996, Ñuñoa,
Santiago Chile.

Mexico:
Av. Convento de Actopan 24 Int. 7A,
Colonia Jardines de Santa Mónica,
Tlalnepantla de Baz, Estado de México,
México, C.P. 54050

10. References

AHMSA. Altos Hornos de México. www.ahmsa.com

Boulay AM, Bare J, Benini L, Berger M, Lathuillière MJ, Manzardo A, Margni M, Motoshita M, Núñez M, Valerie-Pastor A, Ridoutt B, Oki T, Worbe S, Pöster S (2018) The WULCA consensus characterization model for water scarcity footprints: assessing impacts of water consumption based on available water remaining (AWARE). The International Journal of Life Cycle Assessment. Volume 23, Issue 2, pp 368–378. <https://doi.org/10.1007/s11367-017-1333-8>.

EN 15804:2012+A1:2013 (Sustainability of construction works - Environmental product declarations - Core rules for the product category of construction products).

EPD International (2017) Construction products and construction services. 2012:01 Version 2.2 2017-05-30. www.environdec.com.

EPD International (2017) General Programme Instructions for the International EPD® System. Version 3.0, dated 2017-12-11. www.environdec.com.

Frischknecht R, Jungbluth N, Althaus HJ, Bauer C, Doka G, Dones R, Hirschler R, Hellweg S, Humbert S, Köllner T, Loerincik Y, Margni M, Nemecek T (2007) Implementation of Life Cycle Impact Assessment Methods Data v2.0. ecoinvent report No. 3. Swiss Centre for Life Cycle Inventories, Dübendorf.

Guinee JB, Marieke G, Heijungs R, Huppes G, Kleijn R, van Oers L, Wegener S, Suh S, Udo de Haes HA, de Bruijn H, van Duin R, Huijbregts MAJ (2001). Handbook on Life Cycle Assessment, Operational guide to the ISO standards Volume 1, 2a, 2b and 3. Springer Netherlands. DOI 10.1007/0-306-48055-7. Series ISSN 1389-6970.

Hauschild M, Potting J (2005) Spatial differentiation in Life Cycle impact assessment - The EDIP2003 methodology. Institute for Product Development Technical University of Denmark.

Huijbregts MAJ, Steinmann ZJN, Elshout PMF, Stam G, Verones F, Vieira M, Zijp M, Hollander A, van Zelm R. ReCiPe2016: a harmonised life cycle impact assessment method at midpoint and endpoint level. International Journal on Life Cycle Assessment Volume 22 Issue 2. pp 138-147. <https://doi.org/10.1007/s11367-016-1246-y>.

UN (2015) Central Product Classification (CPC) Version 2.1. Department of Economic and Social Affairs. Statistics Division. United Nations, New York.

Wegener AS, van Oers L, Guinée JB, Struijs J, Huijbregts MAJ (2008) Normalisation in product life cycle assessment: An LCA of the global and European economic systems in the year 2000. Science of The Total Environment. Volume 390, Issue 1. Pages 227-240. ISSN 0048-9697. <https://doi.org/10.1016/j.scitotenv.2007.09.040>.