



1 PERFORMANCE DASHBOARD

2 LCA & MATERIAL HEALTH RESULTS & INTERPRETATION

3 HOW WE MAKE IT GREENER

SM Transparency Catalog ▶ International Cellulose Corporation Showroom ▶ K-13

K-13 and K-13 High-R System

K-13 is a high-performance, spray-applied, thermal and acoustical finish system, consisting of natural, plant-based fibers, and specialty water-based adhesive. K-13 is sprayapplied to substrates of ribbed metal decking, wood, concrete, gypsum/drywall, and can adhere to complex surfaces such as domes. Common applications include: restaurants, parking structures, gymnasiums, museums, recording studios, worship centers, classrooms, retail and more. The High-R System is a mechanically supported system for projects requiring a higher R-value. K-13 is efficiently spray-applied up to 10" thick to achieve up to R-37.5.





Performance dashboard

Features & functionality

Contributes to occupant comfort High thermal R-value Exceptional acoustic performance; high NRC value Class I Class A rated per ASTM E 84 Available in standard & custom integrated colors Durable/damage resistant finish

Can be used to provide high light reflectance

Visit ICC for more product information: K-13, K-13 High-R System

Environment & materials

Improved by:

Contains over 50% pre-consumer recycled content Cellulose is made from renewable resources Carbon sequestering material Red List Free

Manufactured in the USA

Certifications, rating systems & disclosures: **GREENGUARD Gold (1)**

Health Product Declaration (HPD) Environmental product declaration (EPD) Rated & approved by Factory Mutual for use in categories I-V

M1 classification of low emitting building materials UL classified

Factory Mutual approved

CSI MasterFormat® 07 21 29 & 09 83 16 **Technical Data Sheet, Guide Specs** For spec help, contact us or call 800.444.1252



values

Download all documents

See LCA, interpretation & rating systems

See materials, interpretation & rating systems











SM Transparency Report (EPD)™ + Material Health Overview™

VERIFICATION

Self-declared

LCA

3rd party reviewed

NSF.

NSF.

Transparency Report (EPD)

3rd party verified

Material evaluation



Validity: 2020/10/16 - 2025/10/16 ICC - 20200122- 003

This environmental product declaration (EPD) was independently verified by NSF to ISO 21930:2017, EN 15804, the ULE PCR and ISO 14025:2006.

NSF Certification, LLC

P.O Box 130140 789 N.Dixboro Road Ann Arbor, MI 48105, USA 734 769 8010

SUMMARY

Reference PCR

Regions; system boundaries North America; Cradle to grave

Functional unit / reference service life:

1 m² of installed insulation w/packaging; thickness that gives an avg thermal resistance of RSI = $1 \text{ m}^2 \cdot \text{K/W}$ over 75 years.

LCIA methodology: TRACI 2.1

LCA software; LCI database SimaPro Analyst 8.5.2.0 Ecolnvent 3.1, 2.2

LCA conducted by: Sustainable Minds

Public LCA:

International Cellulose Corporation 12315 Robin Blvd. Houston, TX 77045

(800) 444-1252

Transparency Report (EPD)

LCA & material health results & interpretation

Life cycle assessment

Scope and summary

Cradle to gate Cradle to gate with options Cradle to grave

Application

K-13 is a total system of recycled natural fibers, chemical treatment, binding system and application method. The K-13 system begins with specially prepared cellulose fibers which are chemically treated. K-13 is produced in a strict, quality controlled manufacturing process. K-13 is applied by an international network of licensed applicators through approved fiber machines and nozzles for control of the fiber/binder ratio.

Functional unit

Reference service life: 75 years. One square meter of installed insulation material, packaging included, with a thickness that gives an average thermal resistance of RSI=1m2·K/W over a period of 75 years.

Reference flow: 2.1502 kg of product

Thickness: 0.0384 m

Manufacturing data


Reporting period: January--December 2018 Location: Houston, TX



Default installation, packaging, and disposal scenarios

At the installation site, insulation products are unpackaged and installed with a blowing machine. The insulation blower is used to spray on the fiber and adhesive. The potential impact of the blower is included in this study. Plastic packaging waste is disposed (100% to landfill), and no maintenance or replacement is required to achieve the product's life span. 1,233,844 kWh of electricity and 8,205,350 kg of water are used annually for installation. After removal, the insulation is assumed to be landfilled.

Material composition greater than 1% by weight MASS PERCENTAGE Mixed recycled papers 54% **Boric acid** Sodium borate 2% Water **PVA** 5% Part B 2% Plastic drums (packaging) 2%

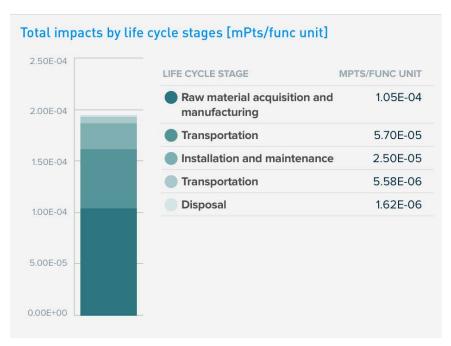

What's causing the greatest impacts

All life cycle stages

The raw material acquisition and manufacturing stages (A1-A3) dominate the results for all impact categories except for ecotoxicity, where the transportation stage dominates. Following these two stages, the next highest impacts come from the construction and installation stage (A5), which have a similar contribution.

Data used for this project represents a mix of primary data collected from ICC on the production of the insulation products (gate-to-gate) and background data from SimaPro databases. Overall, the quality of the data used in this study is considered to be high and representative of the described systems. Data on processing materials and manufacturing the insulation products were collected in a consistent manner and level of detail to ensure high quality data. All submitted data were checked for quality multiple times on the plausibility of inputs and outputs. All questions regarding data were resolved with ICC. Data were collected at ICC's Houston, TX facility.

No substances required to be reported as hazardous are associated with the production of this product. This is a product free of Red List ingredients.

Raw materials acquisition stage

The impact of the raw material acquisition and manufacturing stages are mostly due to the raw material ingredients. Some raw material ingredients such as boric acid and ethylene vinyl acetate copolymer (data set used for PVA) have slightly higher impacts than other ingredients. This is because of the high material weights used in manufacturing.

ICC has energy, waste and water management policies in place and subscribes to third-party environmental services, which includes inspections, audits, and environmental monitoring.

Water management: Water is utilized only in the manufacturing of the adhesives- which are produced in concentrated form and diluted at the job site. No wastewater is generated from the manufacturing process.

Waste management: ICC practices onsite recycling and has partnered with local business to reduce and reuse packaging materials.

Energy management: Products are manufactured in an electrically driven mill, using a process that requires low embodied energy. Electricity use is monitored and processes to conserve energy have been instilled. These products and the manufacturing of these products does not use ozone depleting substances such as CFC's or HCFC's; ozone depletion may occur in the transportation phase or raw material extraction phase.

See how we make it greener

LCA results

LIFE CYCLE STAGE	RAW MATERIAL ACQUISITION AND MANUFACTURING	TRANSPORTATION	INSTALLATION AND MAINTENANCE	TRANSPORTATION	DISPOSAL/REUSE/ RECYCLING
Information modules: Included Stages C1, C3, and D are being excluded	A1 Raw Materials	A4 Transporation/	A5 Construction/ Installation	C2 Transportation	C4 Disposal
*In the installation and maintenance phase,	A2 Transportation	Delivery	B1 Use		
packaging waste and electricity or gas used by the insulation blowing machines in	A3 Manufacturing		B2 Maintenance		
module A5 are the only contributors to the potential impacts.			B3 Repair		
potential impacts.			B4 Replacement		
			B5 Refurbishment		
			B6 Operational energy use		
			B7 Operational water use		

SM 2013 Learn about SM Single Score results

Impacts per 75 years of service	1.05E-04 mPts	5.70E-05 mPts	2.50E-05 mPts	5.58E-06 mPts	1.62E-06 mPts
Materials or processes contributing >20% to total impacts in each life cycle stage	boric acid and ethylene vinyl acetate copolymer used in the production of the insulation.	Truck and trailer, 53ft used to transport product to building site.	Transportation to disposal, energy required for installation with a blowing machine, and disposing of packaging materials.	Transportation to landfill.	Landfilling of product.

TRACI v2.1 results per functional unit

LIFE CYCLE STAGE	FE CYCLE STAGE			TRANSPORTATION	INSTALLATION AND MAINTENANCE	TRANSPORTATION	DISPOSAL/REUSE/ RECYCLING	
Ecological damag	ge							
Impact category	Unit							
Acidification	kg SO ₂ eq	3	8.35E-03	2.25E-03	2.15E-03	2.21E-04	1.48E-04	
Eutrophication	kg N eq	3	1.03E-03	3.21E-04	7.99E-04	3.14E-05	1.70E-05	
Global warming (Embodied carbon)	kg CO₂ eq	eq 2 1.37E+00		6.03E-01	4.25E-01	5.90E-02	1.86E-02	
Ozone depletion	kg CFC-11 eq ② 1.73E-07			1.46E-07	6.29E-08	1.43E-08	6.71E-09	

Human health damage

Impact category	Unit						
Carcinogenics	CTU _h	?	1.27E-08	4.40E-09	2.81E-09	4.31E-10	1.77E-10
Non-carcinogenics	CTU _h	?	1.49E-07	1.30E-07	2.62E-08	1.27E-08	1.78E-09
Respiratory effects	kg PM _{2.5} eq	?	1.19E-03	4.09E-04	1.80E-04	4.00E-05	1.81E-05
Smog	kg O₃ eq	?	9.75E-02	4.58E-02	2.93E-02	4.48E-03	3.54E-03

■ Additional environmental information

Impact category	Unit						
Fossil fuel depletion	MJ, LHV	?	3.30E+00	1.23E+00	5.80E-01	1.20E-01	5.82E-02

USEtox percent contribution

LIFE CYCLE STAGE	FE CYCLE STAGE		RAW MATERIAL ACQUISITION AND MANUFACTURING	TRANSPORTATION	INSTALLATION AND MAINTENANCE	TRANSPORTATION	DISPOSAL/REUSE/ RECYCLING
Additional environment	nmental info	ormatio	on				
Impact category	Unit						
Ecotoxicity	%	% 3 89		7	3	1	0

References

LCA Background Report

ICC Insulation Products LCA Background Report (public version), ICC 2020. SimaPro Analyst 8.5.2.0, Ecoinvent 3.1, 2.2 database.

PCRs

ISO 21930:2017 serves as the core PCR along with EN 15804 and UL Part A.

ULE PCR Part A: Life Cycle Assessment Calculation Rules and Report Requirements v3.1

May 2, 2018. Technical Advisory Panel members reviewed and provided feedback on content written by UL Environment and USGBC. Past and present members of the Technical Advisory Panel are listed in the PCR.

ULE PCR Part B: Building Envelope Thermal Insulation

Version 2.0, April 2018. PCR review conducted by Thomas Gloria, PhD (chair, t.gloria@industrial-ecology.com); Andre Desjarlais; and Christoph Koffler, PhD.

ULE General Program Instructions v2.1, April 2017

ISO 14025, "Sustainability in buildings and civil engineering works -- Core rulesfor environmental product declarations of construction products and services",ISO21930:2017

SM Transparency Reports (TR) are ISO 14025 Type III environmental declarations (EPD) that enable purchasers and users to compare the potential environmental performance of products on a life cycle basis. Environmental declarations from different programs (ISO 14025) may not be comparable. They are designed to present information transparently to make the limitations of comparability more understandable. Limitations of LCA results for the products represent production volumes for the Houston, TX facility only.TRs/EPDs of products that conform to the same PCR and include the same life cycle stages, but are made by different manufacturers, may not sufficiently align to support direct comparisons. They therefore, cannot be used as comparative assertions unless the conditions defined in ISO 14025 Section 6.7.2. 'Requirements for Comparability' are satisfied. Comparison of the environmental performance of building envelope thermal insulation using EPD information shall be based on the product's use and impacts at the building level, and therefore EPDs may not be used for comparability purposes when not considering the building energy use phase as instructed under the PCR. Environmental declarations from different programs based upon differing PCRs may not be comparable. Full conformance with the PCR for building envelope thermal insulation allows EPD comparability only when all stages of a life cycle have been considered, when they comply with all referenced standards, use the same sub-category PCR, and use equivalent scenarios with respect to construction works. Compliance with model building codes does not always ensure compliance with state or local building codes, which may be amended versions of these model codes. Always check with local building code officials to confirm compliancHowever, variations and deviations are possible. Example of variations: Different LCA software and background LCI data sets may lead to different results upstream or downstream of the life cycle stages declared.

Rating systems

The intent is to reward project teams for selecting products from manufacturers who have verified improved life-cycle environmental performance.

LEED BD+C: New Construction | v4 - LEED v4

Building product disclosure and optimization

Environmental product declarations

) Industry-wide (generic) EPD ½ product Product-specific Type III EPD 1 product

LEED BD+C: New Construction | v4.1 - LEED v4.1

Building product disclosure and optimization

Environmental product declarations

Industry-wide (generic) EPD ½ product ✓ Product-specific Type III EPD 1 product

Green Globes for New Construction and Sustainable Interiors Materials and resources

NC 3.5.1.2 Path B: Prescriptive Path for Building Core and Shell

C 3.5.2.2 and SI 4.1.2 Path B: Prescriptive Path for Interior Fit-outs

Collaborative for High Performance Schools National Criteria

MW 7.1 – Environmental Product Declarations Third-party certified type III EPD

BREEAM New Construction 2018

Mat 02 - Environmental impacts from construction products

Environmental Product Declarations (EPD)

Industry average EPD .5 points Multi-product specific EPD .75 points

Product specific EPD 1 point

SM Transparency Report (EPD)™ + Material Health Overview™

This environmental product

VERIFICATION

Self-declared

3rd party reviewed

LCA

NSF.

Transparency Report (EPD)

declaration (EPD) was independently verified by NSF to ISO 21930:2017, EN 15804, the ULE PCR and ISO 14025:2006.

NSF. 3rd party verified **NSF Certification, LLC**

> P.O Box 130140 Material evaluation

Validity: 2020/10/16 - 2025/10/16 ICC - 20200122- 003





SUMMARY Reference PCR

UL Building Envelope Thermal Insulation, 04/18 – 02/23

Regions; system boundaries North America; Cradle to grave

Functional unit / reference service life:

1 m² of installed insulation w/packaging: thickness that gives an avg thermal

resistance of RSI = $1 \text{ m}^2 \cdot \text{K/W}$ over 75 years. LCIA methodology: TRACI 2.1

LCA software; LCI database SimaPro Analyst 8.5.2.0 Ecolnvent 3.1, 2.2

LCA conducted by: Sustainable Minds

International Cellulose Corporation 12315 Robin Blvd. Houston, TX 77045

2 points

(800) 444-1252

1 PERFORMANCE DASHBOARD

LCA & material health results & interpretation

Material health

Assessment scope and results



The Health Product Declaration®

The HPD Open Standard provides a consistent, and transparent format to accurately disclose the material contents and associated hazard classifications for a building product.

How it works

Material ingredients are screened and categorized according to the hazards that international governmental bodies and toxicology experts have associated with them, based on two listings:

- Authoritative lists maintained or recognized by government bodies
- Screening lists, which include chemicals that government bodies determined need further scrutiny, as well as chemical lists not recognized by any government body.

What's in this product and why

K-13 is a spray-applied thermal and acoustical insulation typically used as an exposed ceiling finish requiring no additional barriers or materials. K-13 meets project requirements for thermal insulation, noise control with an attractive natural texture that is available in standard and custom colors.

K-13

The K-13 system begins with specially prepared cellulose fibers combined with natural fire retardants in a strict, quality-controlled manufacturing process to produce a Class A, Class 1 rated material. K-13 is then spray-applied by an international network of professional contractors licensed by ICC to ensure consistent and predictable results. During application, the K-13 fibers combine with a patented water-based adhesive resulting in a durable, exposed finish.

How we're making it healthier

K-13 is made from 3.99% mixed pre-consumer recycled papers and inventoried to 1.000 PPM in accordance with the HPD Collaborative.

K-13 is UL GREENGUARD Gold certified and compliant with LEED v4: Low-Emitting Materials, CDHP/ California Section 01350, SCAQMD Rule 1168, and CHPS- Acoustical Ceiling. Additionally, K-13's thermal and acoustical performance may contribute to sustainable credit categories for green-building initiatives.

K-13 does not contain silica dust, asbestos, mineral or glass fibers, or PCB's.

See how we make it greener

References

Health Product Declaration®

K-13 Acoustical/Thermal Insulation System

Health Product Declaration Open Standard v2.1.1

The standard provides guidance to accurately disclose the material contents of a building product using a standard, consistent, and transparent format.

Rating systems

LEED BD+C: New Construction | v4 - LEED v4 Building product disclosure and optimization

Material Ingredients

Credit value options

1. Reporting

2. Optimization

1 product each 3. Supply Chain Optimization

Living Building Challenge

Materials petals imperatives

10. Red List Free ()12. Responsible Industry ()13. Living Economy Sourcing

WELL Building Standard® **Air and Mind Features**

Air, 26. Enhanced Material Safety Mind, 97. Material Transparency

Mind, 98. Organizational Transparency

Collaborative for High Performance Schools National Criteria MW 10.1 — Building Product Health Related Information Reporting

Product Health Related Information Report



SM Transparency Report (EPD)™ + Material Health Overview™

VERIFICATION

Self-declared

Material evaluation

The material health evaluation is self-declared and done in accordance with the HPD Open Standard 2.1

ICC - 07292019 - 002

HPD Collaborative

401 Edgewater Place, Suite 600 Wakefield, MA 01880

781.876.8871

International Cellulose Corporation 12315 Robin Blvd. Houston, TX 77045 (800) 444-1252

How we make it greener

K-13

See LCA results by life cycle stage

RECYCLED CONTENT AND CARBON SEQUESTRATION

ICC's line of spray-applied systems, consisting of natural, plant-based fibers and specialty, water-based adhesives, are carbon-storing materials that contain over 50% recycled content. Cellulose, the primary raw ingredient, has an exceptional embodied carbon profile and contains wood, cotton, hemp and other rapidly renewable resources. During their useful life, these raw material ingredients sequester carbon reducing the amount of harmful greenhouse gasses in the atmosphere. Cellulose takes less energy to make compared to other building insulation materials.



■ INGREDIENT OPTIMIZATION AND AVOIDANCE OF HAZARDOUS SUBSTANCES

K-13, SonaSpray, Ure-K, and SonaKrete spray-on systems are M1 Classified as Low Emitting Building Material and are compliant with CDPH/CA Section 01350. They are also GREENGUARD Gold Certified per UL Environmental which ensures that a product has met the most rigorous and comprehensive standards for low emissions of volatile organic compounds (VOCs) into indoor air.

ICC products have met the Living Building Challenge requirement that they do not contain chemicals on the Red List. The Red List contains some of the worst materials prevalent in the building industry; for transparency purposes, ICC has provided an ingredient list for 98% of the total product and all proprietary material chemicals have been disclosed to third party to verify they are non-hazardous. K-13, SonaSpray, Ure-K, and SonaKrete spray-on systems are free of heavy metals such as Lead (Pb), Cadmium (Cd), Mercury (Hg), and Hexavalent Chromium (Cr(VI)) or other metals. Furthermore, there are no ozone depleting substances such as CFC's/HCFCs, Isocyanate or any Brominated Flame Retardants (PBTs).



■ TRANSPORTATION AND MANUFACTURING

K-13, SonaSpray, Ure-K, and SonaKrete are manufactured in the United States under the ISO 9001:2015 Quality Management System by International Cellulose Corporation in Houston Texas. Adhesives are produced and shipped in concentrated forms and are diluted with water sourced from the job site. Local sourcing and manufacturing allow for a reduction in transportation costs and emissions.



■ INSTALLATION & MAINTENANCE

International Cellulose Corporation's thermal and acoustical finish systems are spray-applied to common substrates through specialized equipment using approved application techniques. ICC's products are installed by a network of licensed applicators, trained by ICC and supported by their field services team. During the installation, fibers and adhesives are combined forming a durable, monolithic coating over the substrate.



END OF LIFE

International Cellulose Corporation's thermal and acoustical finish systems are spray-applied to common substrates through specialized equipment using approved application techniques. ICC's products are installed by a network of licensed applicators, trained by ICC and supported by their field services team. During the installation, fibers and adhesives are combined forming a durable, monolithic coating over the substrate.





SM Transparency Report (EPD)™ + Material Health Overview™

VERIFICATION

3rd party verified

LCA

NSF.

3rd party reviewed

Transparency Report (EPD) NSF.

Material evaluation

Self-declared



Validity: 2020/10/16 - 2025/10/16 ICC - 20200122- 003

This environmental product declaration (EPD) was independently verified by NSF to ISO 21930:2017, EN 15804, the ULE PCR and ISO 14025:2006.

NSF Certification, LLC

P.O Box 130140 789 N.Dixboro Road Ann Arbor, MI 48105, USA



734 769 8010

SUMMARY

Reference PCR

Regions; system boundaries

North America; Cradle to grave

Functional unit / reference service life:

1 m² of installed insulation w/packaging; thickness that gives an avg thermal resistance of RSI = $1 \text{ m}^2 \cdot \text{K/W}$ over 75 years.

LCIA methodology: TRACI 2.1

LCA software; LCI database SimaPro Analyst 8.5.2.0 Ecolnvent 3.1, 2.2

LCA conducted by: Sustainable Minds

International Cellulose Corporation 12315 Robin Blvd. Houston, TX 77045

(800) 444-1252











K-13 & ThermoCon

Additional EPD content required by: ULE PCR Parts A and B for Building Envelope Thermal Insulation

Data

Parameter

Background This product specific declaration was created by collecting product data over the course of a year for each product at each location the product was manufactured. For products with multiple manufacturing locations, data are a weighted average by production volume at each location. The reference service life applies for the reference in-use conditions only.

Allocation: No allocation was necessary in this project. ICC provided data for four different products from one facility. All the data provided was specific to each product.

Cut-off criteria For the inclusion of mass and energy flows are 1% of renewable primary resource (energy), 1% nonrenewable primary resource (energy) usage, 1% of the total mass input of that unit process, and 1% of environmental impacts. The total of neglected input flows per module does not exceed 5% of energy usage, mass, and environmental impacts. The only exception to these criteria is substances with hazardous and toxic properties, which must be listed even when the given process unit is under the cut-off criterion of 1% of the total mass. No known flows are deliberately excluded from this declaration.

Scenarios and additional technical information

PARAMETER	VALUE	UNII
Transport to the building site [A4]		
Vehicle type	Truck	
Average distance from Houston to installation site	1,610	km
Installation into the building [A5]		
Vehicle type	Truck	
Distance from installation site to disposal	161	km
Mass of plastic packaging waste to disposal	7.02E-06	kg
GWP based in biogenic carbon content of plastic packaging	0	kg CO ₂ e
Disposal/reuse/recycling [C1-C4]		
Vehicle type	Truck	
Distance from installation site to disposal	161	km
Mass of product waste to disposal	0.0084	kg

Resource use, output and waste flows, and carbon emissions and removals for K-13 & Thermocon insulation per functional unit

Resource use indicato	ors														
Renewable primary energy used as energy carrier (fuel)	MJ, LHV	3.47E-01	5.98E-02	1.34E-01	0	0	0	0	0	0	0	0	5.86E-03	0	3.21E-03
Renewable primary resources with energy content used as material	MJ, LHV	1.96E-01	0	3.77E-02	0	0	0	0	0	0	0	0	0	0	0
Total use of renewable primary resources with energy content	MJ, LHV	5.43E-01	5.98E-02	1.72E-01	0	0	0	0	0	0	0	0	5.86E-03	0	3.21E-03
Non-renewable primary resources used as an energy carrier (fuel)	MJ, LHV	2.92E01	9.66E00	7.04E00	0	0	0	0	0	0	0	0	9.46E-01	0	4.61E-01
Non-renewable primary resources with energy content used as material	MJ, LHV	1.58E-01	0	0	0	0	0	0	0	0	0	0	0	0	0
Total use of non-renewable primary resources with energy content	MJ, LHV	2.94E01	9.66E00	7.04E00	0	0	0	0	0	0	0	0	9.46E-01	0	4.61E-01
Secondary materials	kg	1.18E00	0	0	0	0	0	0	0	0	0	0	0	0	0
Renewable secondary fuels	MJ, LHV	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Non-renewable secondary fuels	MJ, LHV	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Recovered energy	MJ, LHV	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Use of net fresh water resources	m3	3.03E00	6.61E-01	5.58E-01	0	0	0	0	0	0	0	0	6.47E-02	0	3.49E-02

Output flows and waste category indicators

Hazardous waste disposed	kg	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Non-hazardous waste disposed	kg	0	0	3.57E-02	0	0	0	0	0	0	0	0	0	0	2.15E00	
High-level radioactive waste, conditioned, to final repository	kg	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Intermediate- and low-level radioactive waste, conditioned, to final repository	kg	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Components for re-use	kg	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Materials for recycling	kg	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Materials for energy recovery	kg	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Exported energy	MJ, LHV	0	0	0	0	0	0	0	0	0	0	0	0	0	0	

Carbon emissions and removals																
Biogenic Carbon Removal from Product	kg CO ₂	1.51E-05	0	0	0	0	0	0	0	0	0	0	0	0	0	
Biogenic Carbon Emission from Product	kg CO ₂	1.37E-02	0	0	0	0	0	0	0	0	0	0	0	0	4.71E-04	
Biogenic Carbon Removal from Packaging	kg CO ₂	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Biogenic Carbon Emission from Packaging	kg CO ₂	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Biogenic Carbon Emission from Combustion of Waste from Renewable Sources Used in Production Processes	kg CO ₂	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Calcination Carbon Emissions	kg CO ₂	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Carbonation Carbon Removals	kg CO ₂	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Carbon Emissions from Combustion of Waste from Non-Renewable Sources used in Production Processes	kg CO ₂	0	0	0	0	0	0	0	0	0	0	0	0	0	0	