



# POLYCOR

## Limestone Floor and Pavers

Originating at the Polycor quarries and through production, limestones are manufactured to tiles and pavers with a wide range of finishes. Limestone is an inherently nonemitting source of VOCs and its durability allows it to perform impeccably in commercial & residential applications, interior or exterior.



### Performance dashboard

#### Features & functionality

Covers the wide selection of Polycor's heritage limestones and any surface finishes available  
Covers interior flooring solutions to exterior paving products, from tiles to XL pavers  
Has an unmatched durability and minimal maintenance needs

#### Visit Polycor for more product information

- [Limestones](#)
- [Commercial Flooring](#)
- [Walkways and patios](#)
- [Floor tile](#)

#### Environment & materials

##### Improved by:

**Polycor's commitment to carbon neutrality translates into:**

- Reduction of product's GWP
- Reduction of product's energy intensity

##### Polycor's ownership of the chain of custody from quarries to plants ensures:

- No child labor and forced labor
- Materials remain 100% natural, free from chemicals or dyes

##### Certifications & rating systems:

- Environmental Product Declaration (EPD)
- Natural Stone Sustainability Standard (ANSI 373)
- Health Product Declaration (HPD)



**Polycor Limestone Flooring LCIA results show a 30% reduction in global warming potential impacts compared to the industry average.**

This product-specific EPD compares results to the [NSI industry-wide Type III EPD](#), a product group benchmark done in conformance with benchmarking guidance in the SM PCR and the SM Part B: Benchmarking Addendum.

**MasterFormat® 09 30 33, 09 63 40, 32 14 40**  
**Limestone Floor and Pavers [Guide Specs](#)**  
For spec help, [contact us](#) or call 418.692.4695

[See LCA, interpretation & rating systems](#)

[See materials, interpretation & rating systems](#)



## SM Transparency Report (EPD)™ – LEED 4.1 EPD Option 2. Optimization

#### VERIFICATION

3rd-party reviewed



Transparency Report (EPD)

3rd-party verified



Validity: 2023/02/13 - 2028/02/13  
Decl #: POL – 20230213 – 002

#### LCA

This environmental product declaration (EPD) was externally verified, according to ISO 21930:2017, SM Part A, and ISO 14025:2006, by Jack Geibig, President, Ecoform.

**Ecoform, LLC**  
11903 Black Road,  
Knoxville, TN 37932  
[www.ecoform.com](http://www.ecoform.com)  
(865) 850-1883



#### SUMMARY

##### Reference PCR

SM PCR Part B: Interior and Exterior Stone Flooring

##### Regions; system boundaries

North America; Cradle to grave

##### Functional unit / reference service life:

1 m<sup>2</sup> of floor covering; 75 years

##### LCIA methodology: TRACI 2.1

##### LCA software; LCI database

SimaPro Developer 9.4  
EcolInvent 3.8, US-EI 2.2

##### LCA conducted by: Sustainable Minds

##### Public LCA:

Life Cycle Assessment of Natural Stone Flooring for Polycor

#### Polycor Inc.

76 rue Saint-Paul, Suite 100  
Quebec City (Quebec), Canada G1K 3V9  
418-692-4695  
[www.polycor.com](http://www.polycor.com)



Contact us

## LCA results & interpretation

## Limestone Floor and Pavers

### Life cycle assessment

#### Scope and summary

- Cradle to gate  Cradle to gate with options  Cradle to grave

#### Product description

Limestone flooring can be applied as interior flooring, exterior flooring, landscaping, and terracing. It tends to be durable and easy to maintain, with an elegant outlook. Limestone makes up 100% of the total mass of the flooring and is used in commercial, residential, and public sector buildings.

The results in this study are presented for flooring with a thickness of 0.5 inches.

#### Functional unit

The functional unit is **one square meter** of floor covering. The amount of limestone needed to meet the functional unit is **18.20 kg**.

#### Manufacturing data

The data for all limestone products were collected from Polycor's limestone quarries and processing facilities covering a period of two years: January 2020 to December 2021. Data for limestone quarry operations were collected from four quarry sites across North America and two quarries from France and grouped as North American limestone quarries and French quarries. Quarries in France are responsible for 5% of the total quarried stone and all the manufacturing facilities are located in North America.

After limestone is extracted from the quarry, it goes to a processing facility. Stone processor operations data were collected from three Polycor limestone processing sites across North America and grouped together as American limestone plants.

- American limestone plants:** three manufacturing facilities in Indiana.

Data were collected from quarries and producers mainly operating in North America (mainly the US). As such, the geographical coverage for this study is based on North American conditions.


#### Default installation, packaging, and disposal scenarios

Flooring is delivered at the job site ready for installation, where minor cuts may be necessary to accommodate design. Ancillary materials used in the installation of the product include mortar, grout, and acrylate. These materials are structural enhancement components used as bonding agents or fillers for joints. Wood and cardboard used as packaging to safely deliver the stone to the site is then transported to be either landfilled or recycled, following US EPA's end of life scenarios for containers and packaging. At the end of its useful life, the flooring is removed and transported to be landfilled.

#### Material composition greater than 1% by weight

MATERIAL	AVG % WT.
Limestone	100%

#### Total impacts by life cycle stages [mPts/per func unit]

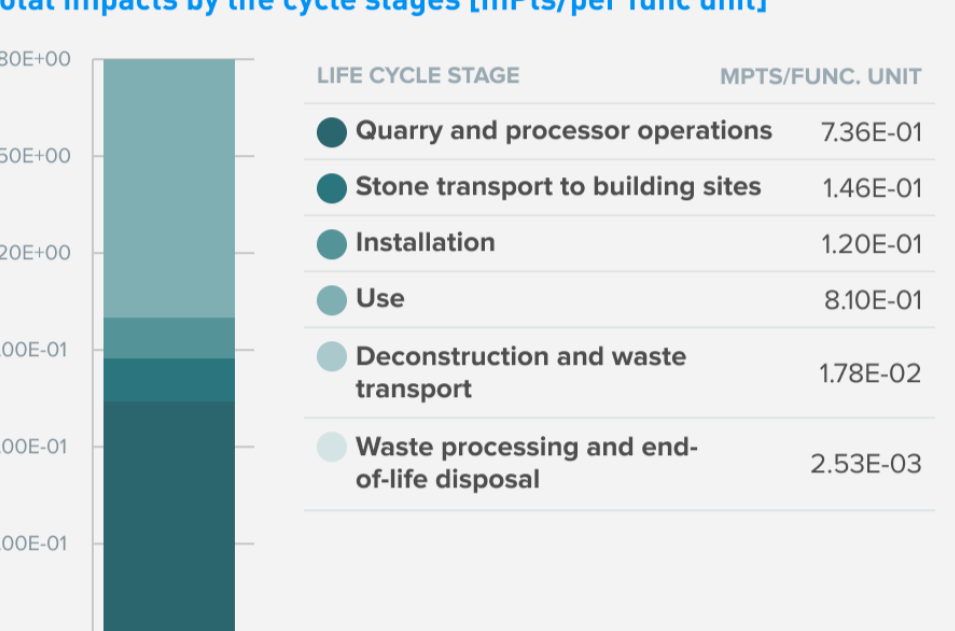


#### About NSI industry-wide EPD results

The NSI industry-wide EPD for natural stone flooring serves as a product group benchmark to which product-specific results can be compared.

Three impact categories are used for comparison: global warming potential, respiratory effects, and carcinogenics. Global warming potential was selected because its reductions alone can contribute towards satisfying credits under LEED. Respiratory effects and carcinogenics were selected because they had the greatest reduction in impacts aside from global warming potential.

#### Total impacts: Product-specific compared to industry-wide

##### Highest and lowest performing impact categories

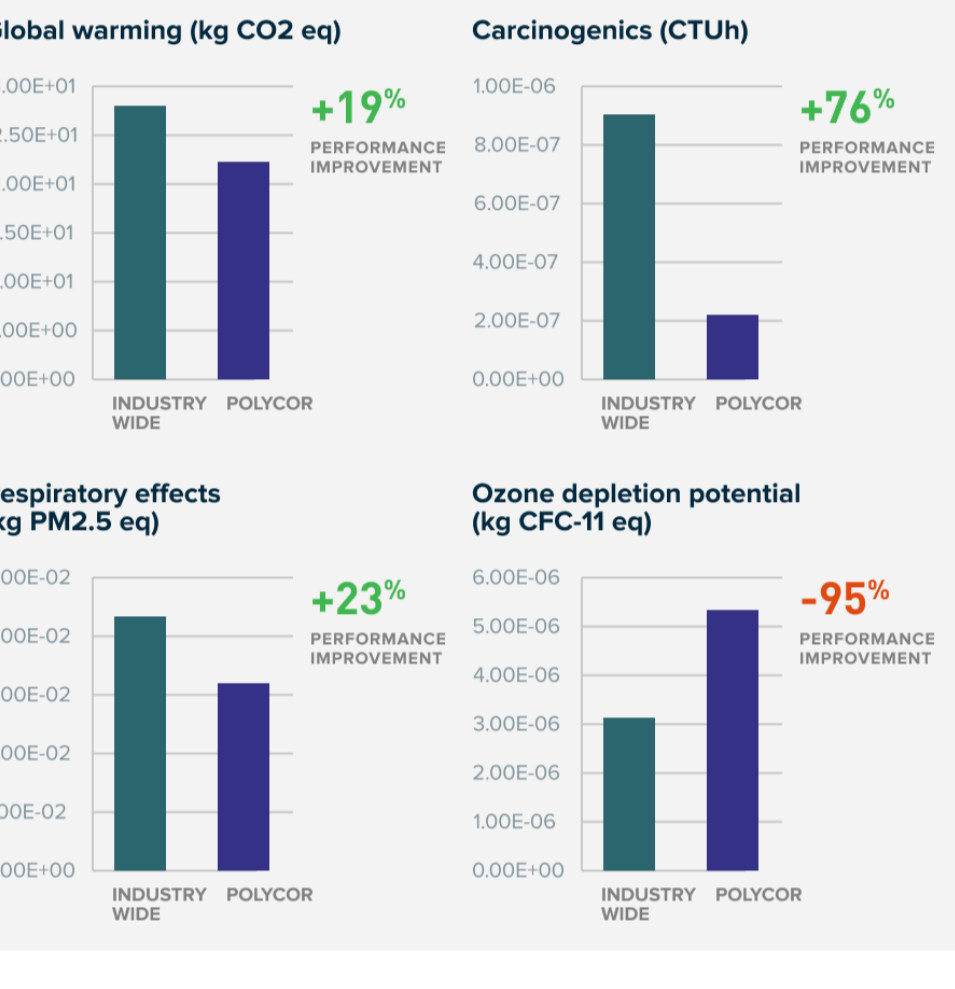

Polycor limestone flooring has better environmental performance in these impact categories than the industry average results but does not represent that the Polycor flooring product is better than any specific manufacturer participating in the industry average.

#### What's causing the greatest impacts

##### All life cycle stages

For limestone flooring, the cradle-to-gate stage (A1-A3) dominates the results for all impact categories except eutrophication and respiratory effects. This study assessed a multitude of inventory and environmental indicators. In addition to the six major impact categories (global warming potential, ozone depletion, acidification, smog, eutrophication, and fossil fuel depletion), additional impact categories have also been included. These six impact categories are globally deemed mature enough to be included in Type III environmental declarations. Other categories are being developed and defined, and LCA should continue making advances in their development. However, the EPD users shall not use additional measures for comparative purposes. LCA results are relative expressions and do not predict impacts on category endpoints, the exceeding of thresholds, safety margins or risks.

Overall results are consistent with expectations for stone flooring's life cycles, with most of the impacts being generated during cradle-to-gate stages.

The primary finding, across the environmental indicators, was that cradle-to-gate stage (A1-A3) dominates the impacts due to the energy consumed at the processing plants. The processor operations (A3) stage is the highest contributor to most of the impact categories, followed closely by the maintenance stage. The transportation of stone from quarries to processing plants, transportation of flooring from processing plants to the installation sites, and use of mortar during installation also generate significant impacts in the overall life cycle impacts of limestone flooring.

**Quarry operations and transport to processors**  
Impacts generated at limestone quarries (A1) are mainly due to the use of grid electricity and fuels in the quarries. Other material inputs generate little impact in comparison to the electricity and fuel consumed. The transportation of limestone from quarries to processing plants generates insignificant impacts in overall life cycle impacts.

**Processor operations and transport to building sites**  
Manufacturing operations at limestone processing plants make up the greatest impact share in many of the impact categories. Energy consumed at processors (both electricity and fuels) is responsible for the majority of impacts, while other material inputs have an insignificant contribution. The transportation of limestone flooring manufactured in processor plants to the building sites also has a considerable impact on the overall life cycle impacts of limestone flooring.

##### Other life cycle stages

**Use of sealants for periodic resealing of limestone flooring and use of mortar during installation also generate significant contributions to the overall life cycle impacts.** Under normal operating conditions, limestone flooring requires not only monthly cleaning but also resealing every five years. Due to the nature of natural stone, it is anticipated that the limestone flooring products will last for the lifetime of the building. The reference service life (RSL) thus meets an ESL of 75 years, and flooring will need no replacements during its service life. End-of-life stages have lower contributions to the total life cycle impacts.

#### How our product compares to the industry benchmark

**Interpretation summary** In November 2022, Natural Stone Institute (NSI) published an industry-wide Type III EPD in which Polycor participated. It followed the SM PCR and SM Part B Benchmarking addendum that enables comparison of a product-specific EPD to the industry benchmark. The SM Part B benchmarking addendum requires the selection of the greatest improvement and lowest performing impact categories.

**Polycor limestone flooring LCIA results show environmental performance improvements across all impact categories evaluated in this study except for ozone depletion.** The impact reductions primarily stem from A3. Differences in electricity and fuel consumption during fabrication operations contribute significantly when comparing Polycor to industry-average results and identifying the contributors to performance improvement.

**The lowest performing impact category (higher impact results than average) is ozone depletion.** It is the only category where impacts were greater than the industry average. Since non-granite stone flooring requires re-sealing every five years, it was assumed that a silicone-based sealer for limestone flooring was applied as part of regular maintenance. The addition of the sealer contributed significantly when comparing Polycor to industry-average results. Other natural stone flooring manufacturers may or may not include this as part of their maintenance activities.

#### Sensitivity analysis

Based on the recommendation provided by Polycor, impacts for processor operations specific to a square meter of limestone flooring was assumed to match the average stone processing for a square meter of limestone. A sensitivity analysis was performed to check the robustness of the results when the energy consumed during processing is varied by +/-20% from the estimate used in this study. The resulting variation in the total life cycle impacts is about 8%, implying that the system is not sensitive to this assumed value.

Another parameter that affects the overall life cycle impacts is the thickness of limestone flooring. The thickness of stone flooring studied varied up to 2 inches. Results have been presented for a typical interior thickness of 0.5 inches, but as the functional mass of varies with the thickness, the impacts also vary. A sensitivity analysis has thus been conducted for various thicknesses of limestone flooring used for different flooring applications. For the thickness of 2 inches and larger, the variation in overall life cycle impacts is greater than 20%, implying that the system is sensitive to thickness value.

Natural stone is one of the lowest embodied carbon construction materials. Although we are proud of this intrinsic quality, we want to make sure that we'll never stop improving it. Our main driver is our ambitious 2025 carbon neutrality pledge. By increasing the use of renewable energy, reducing our dependency on fossil fuels, electrifying our car fleet and increasing the energy efficiency throughout our value chain, we aim to reduce our embodied carbon by 40% by the end of 2025!

Beyond embodied carbon, Polycor only uses rainwater for stone extraction, recycles it, and also uses dry sawing technology in a growing number of quarry operations. In quarrying, production, installation and maintenance, natural stone lowers water use throughout its life cycle.

Polycor is the leader within the Natural Stone Sustainability Standard (ANSI 373) with 25% of our sites certified. This standard examines and verifies numerous areas of natural stone production, effectively improving the baseline for the environmental and social performance of natural stone in alignment with green building practices.

[See how we make it greener](#)

## LCA results

LIFE CYCLE STAGE	A1-A3 PRODUCTION (QUARRY AND PROCESSOR OPERATIONS)	A4 STONE TRANSPORT TO BUILDING SITES	A5 INSTALLATION	B1-B7 USE	C1-C2 DECONSTRUCTION AND WASTE TRANSPORT	C3-C4 WASTE PROCESSING AND END-OF-LIFE DISPOSAL
Information modules: Included (X) Excluded* (MND)	A1 Quarry operations	A4 Transport to building sites	A5 Installation	B1 Use	C1 Deconstruction	C3 Waste Processing
Stages B1, B3-B7, C1, and C3 though included, have no associated activities.	A2 Transport to processors			B2 Maintenance	C2 Waste transport	C4 End of life disposal
*Module D is excluded.	A3 Processor operations			B3 Repair		
				B4 Replacement		
				B5 Refurbishment		
				B6 Operational energy use		
				B6 Operational water use		

#### SM Single Score [Learn about SM Single Score results](#)

Impacts of 1 square meter of floor covering	7.36E-01 mPts	1.46E-01 mPts	1.20E-01 mPts	8.10E-01 mPts	1.78E-02 mPts	2.53E-03 mPts
Materials or processes contributing >20% to total impacts in each life cycle stage	Energy consumed during stone processing (electricity and fuels).	Truck transportation used to transport product to building site.	Use of ancillary materials (mainly mortar) for installation.	Sealants used for periodic resealing.	Waste transport to the landfill centers.	Landfilling after the end of life.

#### TRACI v2.1 results per functional unit

LIFE CYCLE STAGE	A1-A3 PRODUCTION (QUARRY AND PROCESSOR OPERATIONS)	A4 STONE TRANSPORT TO BUILDING SITES	A5 INSTALLATION	B2 MAINTENANCE	C2 WASTE TRANSPORT	C4 END-OF-LIFE DISPOSAL
------------------	--	--------------------------------------	-----------------	----------------	--------------------	-------------------------

#### Ecological damage

Impact category	Unit	Product	Industry	Product	Industry	Product	Industry	Product	Industry	Product	Industry	Product	Industry
Acidification	kg SO <sub>2</sub> eq	6.13E-02	1.07E-01	1.08E-02	3.81E-03	1.18E-02	1.18E-02	6.58E-02	4.20E-02	1.32E-03	1.91E-03	4.53E-04	6.57E-04
Eutrophication	kg N eq	7.40E-03	1.51E-02	1.46E-03	5.13E-04	6.91E-04	6.87E-04	2.82E-02	2.61E-02	1.77E-04	2.57E-04	4.44E-05	6.42E-05
Global warming (Embodied carbon)	kg CO <sub>2</sub> eq	9.18E+00	2.20E+01	3.46E+00	1.22E+00	2.56E+00	2.55E+00	7.28E+00	2.01E+00	4.21E-01	6.10E-01	4.70E-02	6.80E-02
Ozone depletion	kg CFC-11 eq	4.22E-07	1.13E-06	6.90E-07	2.43E-07	1.24E-07	1.22E-07	4.80E-06	1.51E-06	8.40E-08	1.22E-07	8.01E-09	1.16E-08

#### Human health damage

Impact category	Unit	Product	Industry	Product	Industry	Product	Industry	Product	Industry	Product	Industry	Product	Industry
Carcinogenics	CTU <sub>h</sub>	1.07E-07	8.53E-07	1.44E-09	5.06E-10	1.70E-08	1.70E-08	9.90E-08	5.30E-08	1.75E-10	2.54E-10	1.38E-11	1.99E-11
Non-carcinogenics	CTU <sub>n</sub>	7.07E-07	1.80E-06	1.30E-07	4.57E-08	1.97E-07	1.97E-07	1.06E-06	5.65E-07	1.58E-08	2.29E-08	5.44E-10	7.88E-10
Respiratory effects	kg PM <sub>2.5</sub> eq	1.24E-02	2.75E-02	6.80E-04	2.39E-04	1.07E-03	1.07E-03	1.96E-02	1.49E-02	8.28E-05	1.20E-04	5.88E-05	8.52E-05
Smog	kg O <sub>3</sub> eq	1.61E+00	2.46E+00	2.85E-01	1.00E-01	1.70E-01	1.69E-01	8.74E-01	5.58E-01	3.47E-02	5.02E-02	1.37E-02	1.98E-02

#### Additional environmental information

Impact category	Unit	Product	Industry	Product	Industry	Product	Industry	Product	Industry	Product	Industry	Product	Industry
Fossil fuel depletion	MJ, LHV	1.62E+01	2.77E+01	7.05E+00	2.48E+00	2.46E+00	2.44E+00	2.00E+01	1.06E+01	8.58E-01	1.24E+00	9.95E-02	1.44E-01
Ecotoxicity	CTU <sub>e</sub>	45.5 %	72.7 %	7.9 %	2.0 %	2.4 %	1.8 %	43.2 %	22.4 %	1.0 %	1.0 %	0.0 %	0.0 %

See the additional content required by the SM Part B for interior and exterior stone flooring on page 4 of the [Transparency Report PDF](#).

## References

**LCA Background Report**  
Polycor Natural Stone Flooring LCA Background Report (public version), Polycor 2023. SimaPro Analyst 9.4, ecoinvent 3.4 database.

#### PCRs

ISO 21930:2017 serves as the core PCR along with EN 15804 and SM Part A.

**SM Part A: Life Cycle Assessment Calculation Rules and Report Requirements, v2018**  
March, 2018. Document created by Joep Meijer, Naji Kasem, and Kim Lewis and is managed and maintained by the Sustainable Minds Technical Advisory Board (TAB) as outlined in ISO 14025:2006.

**SM Part B: Product group definition for Interior and exterior stone flooring, 2022**  
April, 2022. Part B review conducted by the Sustainable Minds TAB, tab@sustainableminds.com

ISO 14025, "Sustainability in buildings and civil engineering works – Core rules for environmental product declarations of construction products and services"

**Download PDF SM Transparency Report**, which includes the additional EPD content required by the SM Part B.

SM Transparency Reports (TRs) are ISO 14025 Type III environmental declarations (EPD) that enable purchasers and users to compare the total environmental performance of products on a life cycle basis. They are designed to present information transparently to make the limitations of comparability more understandable. A limitation to this study is that not all manufacturers in North America participated. TRs/EPDs of products that conform to the same PCR and include the same life cycle stages, but are made by different manufacturers, may not sufficiently align to support direct comparisons. They therefore, cannot be used as comparative assertions unless the conditions defined in ISO 14025 Section 6.7.2: "Requirements for Comparability" are satisfied. Comparison of the environmental performance of building envelope thermal insulation using EPD information shall be based on the product's use and impact at the building level, and therefore EPDs may not be used for comparability purposes when not considering the building energy use phase as instructed under the PCR. Full conformance with the PCR for stone flooring allows EPD comparability only when all stages of a life cycle have been considered, when they comply with all referenced standards, use the same sub-category PCR, and use equivalent scenarios with respect to construction works. However, variations and deviations are possible. Example of variations: Different LCA software and background LCI data sets may lead to different results upstream or downstream of the life cycle stages declared.

## Rating systems

The intent is to reward project teams for selecting products from manufacturers who have verified improved life-cycle environmental performance.

#### LEED BD+C: New Construction | v4 - LEED v4

Building product disclosure and optimization

##### Environmental product declarations

###### Option 1: Environmental Product Declaration

- Industry-wide (generic) EPD ½ product
- Product-specific Type III EPD 1 product

###### Option 2: Multi-attribute optimization

- Product-specific Type III EPD

#### LEED BD+C: New Construction | v4.1 - LEED v4.1

Building product disclosure and optimization

##### Environmental product declarations

###### Option 1: Environmental Product Declaration

- Industry-wide (generic) EPD 1 product
- Product-specific Type III EPD 1.5 products

###### Option 2. Embodied Carbon/LCA Optimization

The comparative analysis must show impact reduction(s) of at least 10% in the global warming potential (GWP) impact category relative to baseline and includes a narrative describing how the impact reductions were achieved.

- Product-specific Type III EPD 1.5 products

#### BREEAM New Construction 2018

Mat 02 - Environmental impacts from construction products

##### Environmental Product Declarations (EPD)

- Industry average EPD .5 points
- Multi-product specific EPD .75 points
- Product-specific EPD 1 point

## SM Transparency Report (EPD)™ – LEED 4.1 EPD Option 2. Optimization

**VERIFICATION** LCA  
3rd-party reviewed   
Transparency Report (EPD)  
3rd-party verified

Validity: 2023/02/13 - 2028/02/13  
Decl #: POL – 20230213 – 002

**Ecoform, LLC**  
11903 Black Road,  
Knoxville, TN 37932  
www.ecoform.com  
(865) 850-1883

**SUMMARY PCR**  
SM PCR Part B: Interior and Exterior Stone Flooring  
**Regions; system boundaries**  
North America; cradle to grave  
**Functional unit / reference service life:**  
1 m<sup>2</sup> of floor covering; 75 years  
**LCIA methodology:** TRACI 2.1  
**LCA software; LCI database**  
SimaPro Developer 9.4  
Ecoinvent 3.8, US-EI 2.2  
**LCA conducted by:** Sustainable Minds

**Public LCA:**  
Life Cycle Assessment of Natural Stone Flooring for Polycor

**Polycor Inc.**  
76 rue Saint-Paul, Suite 100  
Quebec City (Quebec), Canada G1K 3V9  
418-692-4695  
www.polycor.com

**carbon neutral**  
2025

**Contact us**

## How we make it greener

## Limestone Floor and Pavers

[Collapse all](#)

[See LCA results by life cycle stage](#)

### RAW MATERIALS ACQUISITION

Natural stone quarrying process has high yields and little excess material because the stone is close to surface. It's different from metal mining, where large amounts of earth must be removed to extract very little quantities. Also, underground quarrying, which has been perfected for generations at our Eureka Quarry, reduces land use and is a practice that Polycor wishes to extend to several quarries.

In addition, few consumables are needed to extract natural stone. Contrast that with other building materials, Polycor specifically focuses on sourcing the highest grades of natural stone so that, for instance, a black granite stone, doesn't need dyes to achieve its rich color.

From the bedrock to the point of sale, Polycor maintains an unbroken ownership of the supply chain allowing it to maintain standards of quality and practice.



### TRANSPORTATION

Using stone from local sources is the single biggest opportunity to reduce its embodied carbon. Since natural stone is a heavy material, the environmental impacts for transporting it end up being one of its most significant source of carbon. Natural stone is sourced world-wide and each deposit has unique aesthetic and performance characteristics so this is not always avoidable. Be sure to understand the distances between the quarry, the processing facility, sometimes the distribution centers but also the transportation mode. In most of Polycor's operations, the quarry is within miles of the processing facility.



### MANUFACTURING

Manufacturing natural stone is so simple that you can summarize it by a single action, cutting. Cutting large piece into smaller pieces ending in a finished product. Also, the beauty of natural stone products is that there is no chemical mixed within our products. Therefore, they are inherently a non-emitting source of VOCs.

Recycling water is reused several times into the manufacturing process and is compulsory to achieve ANSI 373 Standard.

There are a large variety of sizes and finishes that are commonly used for natural stone. Design teams can help reducing energy consumption in the following ways: Usage of low embodied carbon finishes such as water jet, 3D analysis to loose as few stone as possible throughout it's transformation, accepting the natural variation in the material so there is more usable material.



### OTHER (USE, END OF LIFE)

Whether you think of the Egyptian pyramids, the Colosseum of Rome, the cathedrals of the European capitals or closer to us; the famous Empire State building; natural stone is the most durable, classic and timeless building material on Earth. With 100+ years of durability, natural stone lasts longer than other building construction material and projects that use natural stone require less maintenance.

Since we don't use any chemicals, natural stone products as well as excess process materials throughout the extraction and transformation phases can be reused or recycled into gravel for roads, landscaping products and even furniture and jewelry. In short, natural stone can be reused and recycled multiple times during its life cycle; the only limit is your imagination!

Nevertheless, even if natural stone ends up in a construction landfill, there will be no toxic chemicals seeping into the earth as the material degrades. It simply returns to the earth, cradle to cradle.



## SM Transparency Report (EPD)™ – LEED 4.1 EPD Option 2. Optimization

#### VERIFICATION

3rd-party reviewed



Transparency Report (EPD)

3rd-party verified



Validity: 2023/02/13 - 2028/02/13

Decl #: POL – 20230213 – 002

#### LCA

This environmental product declaration (EPD) was externally verified, according to ISO 21930:2017, SM Part A, and ISO 14025:2006, by Jack Geibig, President, Ecoform.

**Ecoform, LLC**  
11903 Black Road,  
Knoxville, TN 37932  
www.ecoform.com  
(865) 850-1883



#### SUMMARY

**Reference PCR**  
SM PCR Part B: Interior and Exterior Stone Flooring

**Regions; system boundaries**  
North America; Cradle to grave

**Functional unit / reference service life:**  
1 m<sup>2</sup> of floor covering; 75 years

**LCIA methodology:** TRACI 2.1

**LCA software; LCI database**  
SimaPro Developer 9.4  
Ecolnvent 3.8, US-EI 2.2

**LCA conducted by:** Sustainable Minds

**Public LCA:**  
Life Cycle Assessment of Natural Stone Flooring for Polycor

#### Polycor Inc.

76 rue Saint-Paul, Suite 100  
Quebec City (Quebec), Canada G1K 3V9  
418-692-4695  
www.polycor.com



Contact us

## Additional EPD content required by: SM Part B: Interior and Exterior Stone Flooring EPD Requirements

## Limestone Floor and Pavers

### Data

**Background** This product-specific declaration was created by collecting data for one square meter of limestone floor covering. Material and production inputs from each quarry and processor site were used to calculate weighted averages of those inputs based on the production share of the site.

**Allocation** The allocation methods used were examined according to the updated allocation rules in ISO 21930:2017. Quarry inputs and outputs were divided evenly among the quarried limestone by mass, and no co-product allocation was needed. Similarly, no co-product allocation was required for processor operations as well since processing data was collected from Polycor's processing plants specific to limestone. The processor inputs and outputs were divided evenly among the processed stone by area.

**Cut-off criteria** for the inclusion of mass and energy flows are 1% of renewable primary resource (energy) usage, 1% nonrenewable primary resource (energy) usage, 1% of the total mass input of that unit process, and 1% of environmental impacts. The total of neglected input flows per module does not exceed 5% of energy usage, mass, and environmental impacts. No known flows are deliberately excluded from this declaration. Biogenic carbon is included in reported results.

**Quality** Primary data was collected for a time period of two years, which represents typical operations of Polycor's limestone quarry and processors across North America. Inventory data is considered to have a good precision and provide a representative depiction of the industry average. Data is also considered to be complete as no known flows are deliberately excluded from this analysis other than those defined to be outside of the system boundary. Proxy and generic datasets have been used for some materials and processes, but are considered to be sufficiently representative.

### Quarry and Manufacturing Plant information

Data Group	Quarry location(s)
North American Limestone Quarries	Adams Quarry, Bloomington, IN Empire Quarry, Oolitic, IN Eureka Quarry, Bedford, IN Victor Quarry, Bloomington, IN
French Limestone Quarries (5% of the total quarried stone)	Massangis Quarry, Massangis, France Rocherons Quarry, Corgoloin et Comblanchien, France
Data Group	Manufacturing Plant location(s)
North American Limestone Plants	Empire Plant, Oolitic, IN Eureka Plant, Bedford, IN Victor Plant, Bloomington, IN


### Relevant technical properties

Parameter	Unit	Test Method	Value
CSI Masterformat classification	09 30 33; 09 63 40; 32 14 40		
Stone type	Limestone		
Stone grades	All grades		
Thickness to achieve functional unit	mm		12.70
Product weight	kg		18.20
Density	kg/m <sup>3</sup>		2307
Flexural strength	Mpa	C880	3.45
Modulus of rupture	MPa	C99	2.76
Compressive strength	MPa	C170	12.41
Thermal conductivity	W/m.k	C518	1.26
Thermal resistance	m.K/W	C518	0.79
Liquid water absorption	% of dry wt	C97	10-15

### Major system boundary exclusions

- Capital goods and infrastructure,
- Maintenance and operation of support equipment;
- Manufacture and transport of packaging materials not associated with final product;
- Human labor and employee transport;
- Building operational energy and water use not associated with final product.

### Production flow chart

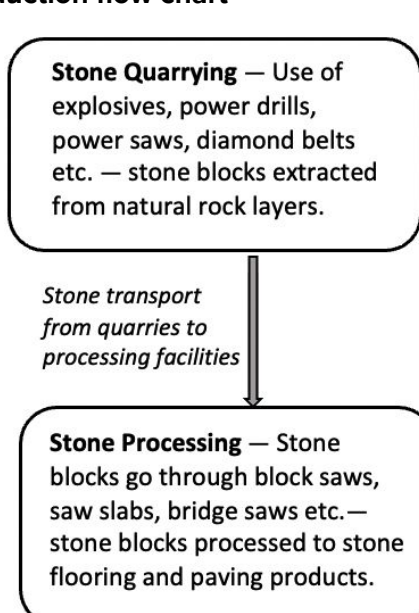

### Scenarios and additional technical information

#### Transport from Quarry to Processor (A2)

Based on the primary data, the transport distance between Polycor's limestone quarry and processing facilities varies, & the weighted distance is 36 km.

#### Transport to the building site (A4)

Parameter	Value	Unit
Vehicle type	Lorry, 16-32 ton	
Fuel type	Diesel	
Liters of fuel	0.41	l/100 km
Distance from manufacturer to installation site	800	km (per PCR)
Capacity utilization (mass based)	100	%
Gross density of products transported	2,207	kg/m <sup>3</sup>
Capacity utilization volume factor	1	

#### Packaging scenario assumptions

Based on EPA's 2018 data, it has been assumed that 37% of all packaging will be landfilled, with the rest recycled.

#### Installation into the building (A5)

It is assumed that flooring fabrication (cutting and finishing to required size) is done at the processing plants and is typically delivered to the job site ready for installation. For the minor changes necessary to accommodate changes, we have considered the use of manual equipment like hacksaws, tile cutters, handle, chisels, tile nippers etc.

Installation scrap assumed	Value	Unit	
Ancillary materials - Mortar Grout Acrylate	4.07 0.21 0.04	kg	
Net freshwater consumption	0.0004	m <sup>3</sup>	
Electricity consumption	0	kWh	
Product loss per functional unit (scrap)	0.91	kg	
Waste materials at the construction site before waste processing (stone scrap and packaging waste)	1.86	kg	
Output materials from on-site waste processing	0	kg	
Mass of packaging waste by type	Cardboard Wood	0 2.53	kg
Biogenic carbon contained in packaging	4.64	kg CO <sub>2</sub>	
Direct emissions to ambient air, soil and water	0	kg	
VOC emissions	0	µg/m <sup>3</sup>	
Transport distance for both stone scrap and packaging waste (Diesel-powered truck/trailer)	161	km	

#### Maintenance scenario parameters

Maintenance process information	Cleaning and resealing the surface of limestone flooring		
Maintenance cycle	Monthly cleaning (900 cycles per RSL & ESL) Sealing every 5 years (14 cycles per RSL & ESL)		
Net freshwater consumption - municipal water supply	0.09 (for entire lifetime)		m <sup>3</sup>
Ancillary materials - Soap Sealant	4.5 (for entire lifetime) 2.31 (for entire lifetime)		kg kg
Energy input during maintenance	Not necessary		

#### Reference service life information

Reference Service Life (RSL)	75	years
Design application parameters	Outdoor and indoor applications	
Outdoor environment	Installation as recommended by manufacturer.	
Indoor environment	Installation as recommended by manufacturer.	
Use conditions	All conditions	

#### End of life (C1-C4)

Assumptions for scenario development	The product is dismantled and removed from the building manually. It is transported to a local facility where it requires no further processing before final disposition.		
Collection process	Collected separately	0	kg
	Collected with mixed construction waste	22.27	kg
Recovery	Reuse	0	kg
	Recycling (0%)	0	kg
	Landfill (100%)	22.27	kg
Waste transport		161	km
Final disposal		22.27	kg
Removals of biogenic carbon (excluding packaging)		0	kg CO <sub>2</sub>

#### Hazardous waste

Polycor's limestone flooring does not contain substances that are identified as hazardous according to the Resource Conservation and Recovery Act (RCRA), Subtitle C.

#### Calcination CO<sub>2</sub> emissions

Although calcination and carbonation is not relevant to limestone flooring products, calcination occurs during installation stage due to the use of mortar. Mortar includes cement calcination CO<sub>2</sub> emissions which is calculated & reported separately using a carbon intensity factor of 886 CO<sub>2</sub> per ton of cement (Source: [U.S. Cement Industry Carbon Intensities \(2019\)](#)).

## LCIA results, resource use, output & waste flows, carbon emissions & removals per m<sup>2</sup> of limestone flooring

Parameter	Unit	A1-A3	A4	A5	B1	B2	B3-B7	C1	C2	C3	C4	Total
-----------	------	-------	----	----	----	----	-------	----	----	----	----	-------

### LCIA results (per m<sup>2</sup> of limestone flooring)

Ozone depletion	kg CFC-11 eq	4.22E-07	6.90E-07	1.24E-07	0	4.80E-06	0	0	8.40E-08	0	8.01E-09	6.13E-06
Global warming	kg CO <sub>2</sub> eq	9.18E+00	3.46E+00	2.56E+00	0	7.28E+00	0	0	4.21E-01	0	4.70E-02	2.29E+01
Smog	kg O <sub>3</sub> eq	1.61E+00	2.85E-01	1.70E-01	0	8.74E-01	0	0	3.47E-02	0	1.37E-02	2.99E+00
Acidification	kg SO <sub>2</sub> eq	6.13E-02	1.08E-02	1.18E-02	0	6.58E-02	0	0	1.32E-03	0	4.53E-04	1.52E-01
Eutrophication	kg N eq	7.40E-03	1.46E-03	6.91E-04	0	2.82E-02	0	0	1.77E-04	0	4.44E-05	3.80E-02
Carcinogenics	CTUh	1.07E-07	1.44E-09	1.70E-08	0	9.90E-08	0	0	1.75E-10	0	1.38E-11	2.25E-07
Non-carcinogenics	CTUh	7.70E-07	1.30E-07	1.97E-07	0	1.06E-06	0	0	1.58E-08	0	5.44E-10	2.17E-06
Respiratory effects	kg PM <sub>2.5</sub> eq	1.24E-02	6.80E-04	1.07E-03	0	1.96E-02	0	0	8.28E-05	0	5.88E-05	3.39E-02
Ecotoxicity	CTUe	45.52%	7.9%	2.4%	0%	43.2%	0%	0%	1.0%	0%	0%	100%
Fossil fuel depletion	MJ surplus	1.62E+01	7.05E+00	2.46E+00	0	2.00E+01	0	0	8.58E-01	0	9.95E-02	4.66E+01

### Resource use indicators (per m<sup>2</sup> of limestone flooring)

Renewable primary energy used as energy carrier (fuel)	MJ, LHV	5.55E+01	7.21E-02	1.48E+00	0	2.07E+02	0	0	8.78E-03	0	1.35E-03	2.64E+02
Renewable primary resources with energy content used as material	MJ, LHV	1.72E+01	0	0	0	0	0	0	0	0	0	1.72E+01
Total use of renewable primary resources with energy content	MJ, LHV	7.28E+01	7.21E-02	1.48E+00	0	2.07E+02	0	0	8.78E-03	0	1.35E-03	2.81E+02
Non-renewable primary resources used as an energy carrier (fuel)	MJ, LHV	1.92E+02	4.64E+01	2.35E+01	0	1.94E+02	0	0	5.65E+00	0	6.58E101	4.62E+02
Non-renewable primary resources with energy content used as material	MJ, LHV	7.38E-02	0	0	0	0	0	0	0	0	0	7.38E-02
Total use of non-renewable primary resources with energy content	MJ, LHV	1.93E+02	4.64E+01	2.35E+01	0	1.94E+02	0	0	5.65E+00	0	6.58E101	4.62E+02
Secondary materials	kg	0	0	0	0	0	0	0	0	0	0	0
Renewable secondary fuels	MJ, LHV	0	0	0	0	0	0	0	0	0	0	0
Non-renewable secondary fuels	MJ, LHV	0	0	0	0	0	0	0	0	0	0	0
Recovered energy	MJ, LHV	0	0	0	0	0	0	0	0	0	0	0
Use of net fresh water resources	m <sup>3</sup>	5.50E+00	7.86E-03	2.10E+00	0	1.34E+01	0	0	9.57E-04	0	1.15E-04	2.10E+01

### Output flows and waste category indicators (per m<sup>2</sup> of limestone flooring)

Hazardous waste disposed	kg	4.15E-03	0	0	0	0	0	0	0	0	0	4.15E-03
Non-hazardous waste disposed	kg	8.19E-02	0	2.69E+00	0	0	0	0	0	0	1.91E+01	2.19E+01
High-level radioactive waste, conditioned, to final repository	kg	8.33E-03	3.77E-06	3.10E-04	0	2.11E-03	0	0	4.59E-07	0	7.06E-08	1.08E-02
Intermediate- and low-level radioactive waste, conditioned, to final repository	kg	3.58E-05	3.96E-08	5.84E-07	0	1.26E-06	0	0	4.82E-09	0	7.44E-10	3.77E-05
Components for re-use	kg	0	0	0	0	0	0	0	0	0	0	0
Materials for recycling	kg	4.62E+01	0	2.35E+00	0	0	0	0	0	0	0	4.86E+01
Materials for energy recovery	kg	0	0	0	0	0	0	0	0	0	0	0
Exported energy	MJ, LHV	0	0	0	0	0	0	0	0	0	0	0

### Carbon emissions and removals (per m<sup>2</sup> of limestone flooring)

Biogenic carbon removal from packaging	kg CO <sub>2</sub>	4.65E+00	0	2.32E-01	0	0	0	0	0	0	0	4.88E+00
Biogenic carbon emission from packaging	kg CO <sub>2</sub>	0	0	3.53E+00	0	0	0	0	0	0	0	3.53E+00
Biogenic carbon emission from combustion of waste from renewable sources used in production processes	kg CO <sub>2</sub>	0	0	0	0	0	0	0	0	0	0	0
Calcination carbon emissions	kg CO <sub>2</sub>	0	0	1.01E+00	0	0	0	0	0	0	0	1.01E+00
Carbon emissions from combustion of waste from non-renewable sources used in production processes	kg CO <sub>2</sub>	0	0	0	0	0	0	0	0	0	0	0