



PROFLO® Calhoun 1500 Series Toilet

PF1500WH, PF1501WH, PF1503WH, PF6110WH, PF6112RWH, PF6112WH,PF6112WHM, PF6114WH, PF6112KWH
1.28gpf, 1.6gpf

Utilizing a gravity flush system to create a powerful flushing action, the WaterSense certified 1.28 gpf version of the Calhoun 1500 Series Toilet uses 20% less water than the current standard while maintaining superior performance. It is constructed of vitreous china to ensure durability and dependability. The toilet installs in a floor mounted configuration, offers an elongated bowl option for extra comfort and multiple tank options to service different rough-ins.

When it comes to quality, PROFLO is uncompromising—treating value and performance as equals. Craftsmanship and style work hand-in-hand to deliver the best possible product. From rough products to finished fixtures, PROFLO products are developed with both presentation and performance in mind.



Performance dashboard

Features & functionality

- Available in 1.28 GPF and 1.6 GPF
- Gravity-fed Siphon Jet Flush
- Flush Valve: 3"
- Sanitary bar on bowl for easy cleaning
- Quick connect, two-bolt tank-to bowl installation

Visit Ferguson for more product information

[PF1500WH](#), [PF1501WH](#), [PF1503WH](#), [PF6110WH](#), [PF6112RWH](#), [PF6112WH](#), [PF6112WHM](#), [PF6114WH](#), [PF6112KWH](#)

MasterFormat® 22 42 13.13
PROFLO® Calhoun 1500 Series Toilet
[Technical Data Sheet](#)

Environment & materials

Improved by:

- APMO/cUPC
- ASME A112.19.2 / CAS B45.1
- MaP Rated 1000g

Certification & rating systems:

EPA WaterSense certified

[See LCA, interpretation & rating systems](#)

[See materials, interpretation & rating systems](#)




SM Transparency Report (EPD)™ + Material Health Overview™

EPD

3rd-party reviewed 

Transparency Report (EPD)

3rd-party verified 

Validity: 08/13/2024 – 08/12/2029
FER – 20240813 – 002

MATERIAL HEALTH

Self-declared 

Material
evaluation

This environmental product declaration (EPD) was externally verified by Industrial Ecology Consultants, according to ISO 21930:2017; SM Part A; SM Part B: Residential toilets; and ISO 14025:2006.

Industrial Ecology Consultants
35 Bracebridge Rd
Newton, MA 02459
www.industrial-ecology.com
(617) 553-4929



Industrial Ecology Consultants

SUMMARY

Reference PCR
SM Part B: Residential toilets, v3.0

Regions; system boundaries
North America; Cradle-to-grave

Functional unit
One residential toilet in an average residential environment used over the estimated service of the building

LCIA methodology; LCA software;
LCI database
TRACI 2.1; SimaPro Analyst 9.5;
ecoinvent v3.10 and US-EI 2.2
databases

Public LCA
LCA background report of Ferguson
single handle lavatory faucets &
residential two-piece toilets

FERGUSON

751 Lakefront Commons
Newport News, VA 23606
(800) 221-3379

Contact us

LCA results & interpretation

PROFLO® Calhoun 1500 Series Toilet

Toilet with 1.28gpf tank

Toilet with 1.6gpf tank

EPD additional content

Material health

Scope and summary

- ☐ Cradle to gate
- ☐ Cradle to gate with options
- ☒ Cradle to grave

Functional unit

One residential toilet in an average residential environment used over the estimated service of the building. The expected service life (ESL) of a building is 75 years, and all use stage activity and impacts are accounted for in that full ESL period. The reference service life (RSL) of the toilet is 20 years. This two-piece toilet is comprised of a toilet bowl, toilet tank, and toilet seat, weighing a total of 45.5 kg.

Manufacturing data

Manufacturing data has been collected at the manufacturing facility in China for the data reporting period of 2023.

Maintenance

The cleaning of the toilet involves cleaning it twice a month, using 50mL of a 1% sodium lauryl sulfate (SLS) solution per clean for 75 years, which is the building estimated service life. The use of 50 mL/clean over 24 cleans/year for 75 years gives a total of 90L of solution. Using a density of 1.01kg/L for a 1% SLS solution, 90.9kg of solution will be needed over the course of 75 years. Therefore, 0.9kg of SLS plus 90kg of water were included in the model.


Repair

The flush handle, rubber ring, and fill valve seals in the tank are assumed to be fully replaced once during each reference service life (RSL) period of 20 years. The old components are assumed to be 100% landfilled with a waste transportation distance of 100km.





Material composition greater than 1% by weight

PART	MATERIAL	%WT.
Product	Ceramic	85-90%
Product	Polypropylene	2-5%
Packaging	Carton, paper inserts and label	2-5%
Product	Acrylonitrile butadiene styrene (ABS)	1-2%
Product	Other	<1%

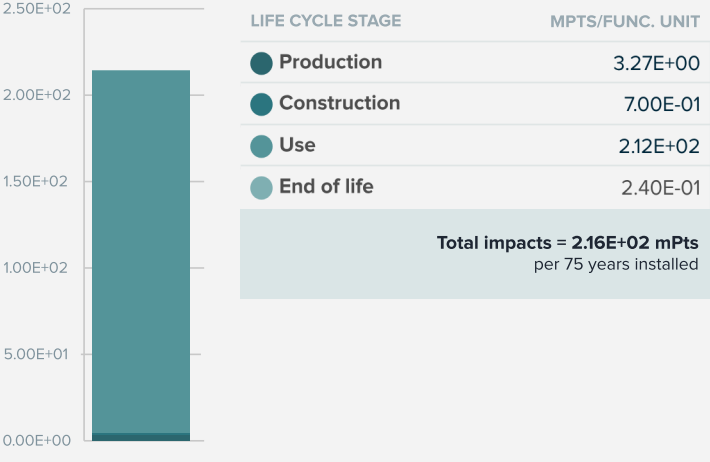Total impacts by life cycle stage [mPts/func unit]



LCA results

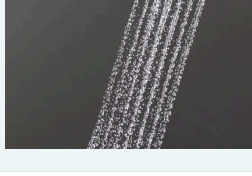LIFE CYCLE STAGE	PRODUCTION	CONSTRUCTION	USE	END OF LIFE
	(X) A1 Raw materials	(X) A4 Transportation/ Delivery	(X) B1 Use	(X) C1 Deconstruction/ Demolition
	(X) A2 Transportation	(X) A5 Construction/ Installation	(X) B2 Maintenance	(X) C2 Transportation
	(X) A3 Manufacturing		(X) B3 Repair	(X) C3 Waste processing
			(X) B4 Replacement	(X) C4 Disposal
			(X) B5 Refurbishment	
Information modules: Included (X) Excluded (MND)*			(X) B6 Operational energy use	
			(X) B7 Operational water use	
				

SM Single Score [mPts/func unit]

Toilet with 1.28 gpf tank	3.27 mPts	0.7 mPts	211.81 mPts	0.24 mPts
Materials or processes contributing >20% to total impacts in each life cycle stage	Ceramic parts production for the toilet tank and bowl.	Transportation of the product to installation site or consumer and disposal of packaging.	Water consumed during toilet operation.	Transport to waste processing and final disposal of the toilet in a landfill.

TRACI v2.1 results per functional unit - PROFLO® Calhoun 1500 Series Two-piece Toilet 1.28 gpf

Ecological damage

Impact category	Unit				
Global warming	kg CO ₂ eq ⓘ	6.32E+01	1.11E+01	1.25E+03	5.47E+00
Ozone depletion	kg CFC-11 eq ⓘ	1.03E-06	6.00E-07	5.62E-05	1.01E-06
Acidification	kg SO ₂ eq ⓘ	2.57E-01	1.73E-01	6.18E+00	2.87E-02
Eutrophication	kg N eq ⓘ	2.40E-02	7.93E-03	1.37E+01	3.40E-03

Human health damage

Impact category	Unit				
Smog	kg O ₃ eq ⓘ	3.93E+00	3.42E+00	6.47E+01	8.43E-01
Respiratory effects	kg PM _{2.5} eq ⓘ	4.19E-02	9.69E-03	4.27E-01	3.36E-03

Additional environmental information

Impact category	Unit				
Carcinogenics	CTU _h ⓘ	2.59E-07	3.40E-08	3.76E-05	2.15E-09
Non-carcinogenics	CTU _h ⓘ	5.84E-06	5.15E-07	7.64E-04	2.38E-07
Ecotoxicity	CTU _e ⓘ	5.94E+01	7.72E+00	2.02E+03	9.97E-01
Fossil fuel depletion	MJ surplus ⓘ	8.27E+01	1.94E+01	1.58E+03	9.78E+00

References

LCA Background Report

LCA background report of Ferguson single handle lavatory faucets & residential two-piece toilets, 2024; SimaPro Analyst 9.5; ecoinvent v3; TRACI 2.1.

ISO 14025, “Sustainability in buildings and civil engineering works -- Core rules for environmental product declarations of construction products and services”

ISO 21930:2017, "Sustainability in Building Construction — Environmental Declaration of Building Products" serves as the core PCR along with Sustainable Minds Part A.

SM Part A: LCA calculation rules and report requirements, version 2023

August, 2023. PCR review conducted by the Sustainable Minds TAB, tab@sustainableminds.com.

SM Part B: Residential toilets, v3.0

March, 2024. PCR reviewed for conformance to ISO 14025, ISO 21930:2017, and ACLCA PCR Open Standard v1.0 by Jack Geibig, Chair (Ecoform); Hugues Imbeault-Tétrault, Ing., M.Sc.A. (Groupe AGÉCO); Rebe Feraldi, LCACP, CLAR (Pacific Northwest National Laboratory).

Download PDF SM Transparency Report/EPD

SM Transparency Reports (TR) are ISO 14025 Type III environmental declarations (EPD) that enable purchasers and users to compare the potential environmental performance of products on a life cycle basis. They are designed to present information transparently to make the limitations of comparability more understandable. Environmental declarations of products that conform to the same PCR and include the same life cycle stages, but are made by different manufacturers, may not sufficiently align to support direct comparisons. They therefore cannot be used as comparative assertions unless the conditions as defined in ISO 14025 Section 6.7.2. 'Requirements for Comparability' are satisfied. In order to support comparative assertions, this EPD meets all comparability requirements stated in ISO 14025:2006. However, differences in certain assumptions, data quality, and variability between LCA data sets may still exist. Any EPD comparison must be carried out at the building level per ISO 21930 guidelines, use the same sub-category PCR where applicable, include all relevant information modules, be limited to EPDs applying a functional unit, and be based on equivalent scenarios with respect to the context of construction works. Some LCA impact categories and inventory items are still under development and can have high levels of uncertainty. To promote uniform guidance on the data collection, calculation, and reporting of results, the ACLCA methodology (ACLCA 2019) was used.

Rating systems

The intent is to reward project teams for selecting products from manufacturers who have verified improved life-cycle environmental performance.

LEED BD+C: New Construction | v4 - LEED v4

Building product disclosure and optimization

Environmental product declarations

- ☐ Industry-wide (generic) EPD
- ☒ Product-specific Type III EPD

LEED BD+C: New Construction | v4.1 - LEED v4.1

Building product disclosure and optimization

Environmental product declarations

- ☐ Industry-wide (generic) EPD
- ☒ Product-specific Type III EPD

Collaborative for High Performance Schools National Criteria

MW C5.1 – Environmental Product Declarations

- ☒ Third-party certified type III EPD

Green Globes for New Construction and Sustainable Interiors

Materials and resources

- ☒ NC 3.5.1.2 Path B: Prescriptive Path for Building Core and Shell
- ☒ NC 3.5.2.2 and SI 4.1.2 Path B: Prescriptive Path for Interior Fit-outs

BREEAM New Construction 2018

Mat 02 - Environmental impacts from construction products

Environmental Product Declarations (EPD)

- ☐ Industry-average EPD
- ☐ Multi-product specific EPD
- ☒ Product-specific EPD



SM Transparency Report (EPD)™ + Material Health Overview™

EPD	LCA
3rd-party reviewed	<input checked="" type="checkbox"/>
Transparency Report (EPD)	
3rd-party verified	<input checked="" type="checkbox"/>
Validity: 08/13/2024 – 08/12/2029 FER – 20240813 – 002	
MATERIAL HEALTH	Material evaluation
Self-declared	<input checked="" type="checkbox"/>

This environmental product declaration (EPD) was externally verified by Industrial Ecology Consultants, according to ISO 21930:2017; SM Part A; SM Part B: Residential toilets; and ISO 14025:2006.

Industrial Ecology Consultants
35 Bracebridge Rd
Newton, MA 02459
www.industrial-ecology.com
(617) 553-4929



Industrial Ecology Consultants

SUMMARY

Reference PCR

SM Part B: Residential toilets, v3.0

Regions; system boundaries

North America; Cradle-to-grave

Functional unit

One residential toilet in an average residential environment used over the estimated service of the building

LCIA methodology; LCA software; LCI database

TRACI 2.1; SimaPro Analyst 9.5; ecoinvent v3.10 and US-EI 2.2 databases

Public LCA

LCA background report of Ferguson single handle lavatory faucets & residential two-piece toilets

FERGUSON

751 Lakefront Commons
Newport News, VA 23606
(800) 221-3379

Contact us

LCA results & interpretation

PROFLO® Calhoun 1500 Series Toilet

- Toilet with 1.28gpf tank
- Toilet with 1.6gpf tank
- EPD additional content
- Material health

Scope and summary

- ☐ Cradle to gate
- ☐ Cradle to gate with options
- ☒ Cradle to grave

Functional unit

One residential toilet in an average residential environment used over the estimated service of the building. The expected service life (ESL) of a building is 75 years, and all use stage activity and impacts are accounted for in that full ESL period. The reference service life (RSL) of the toilet is 20 years. This two-piece toilet is comprised of a toilet bowl, toilet tank, and toilet seat weighing a total of 47.2 kg.

Manufacturing data

Manufacturing data has been collected at the manufacturing facility in China for the data reporting period of 2023.


Maintenance

The cleaning of the toilet involves cleaning it twice a month, using 50mL of a 1% sodium lauryl sulfate (SLS) solution per clean for 75 years, which is the building estimated service life. The use of 50 mL/clean over 24 cleans/year for 75 years gives a total of 90L of solution. Using a density of 1.01kg/L for a 1% SLS solution, 90.9kg of solution will be needed over the course of 75 years. Therefore, 0.9kg of SLS plus 90kg of water were included in the model.

Repair

The flush handle, rubber ring, and fill valve seals in the tank are assumed to be fully replaced once during each reference service life (RSL) period of 20 years. The old components are assumed to be 100% landfilled with a waste transportation distance of 100km.

Material composition greater than 1% by weight		
PART	MATERIAL	%WT.
Product	Ceramic	85-90%
Product	Polypropylene	2-5%
Packaging	Carton, paper inserts and label	2-5%
Product	Acrylonitrile butadiene styrene (ABS)	1-2%
Product	Other	<1%

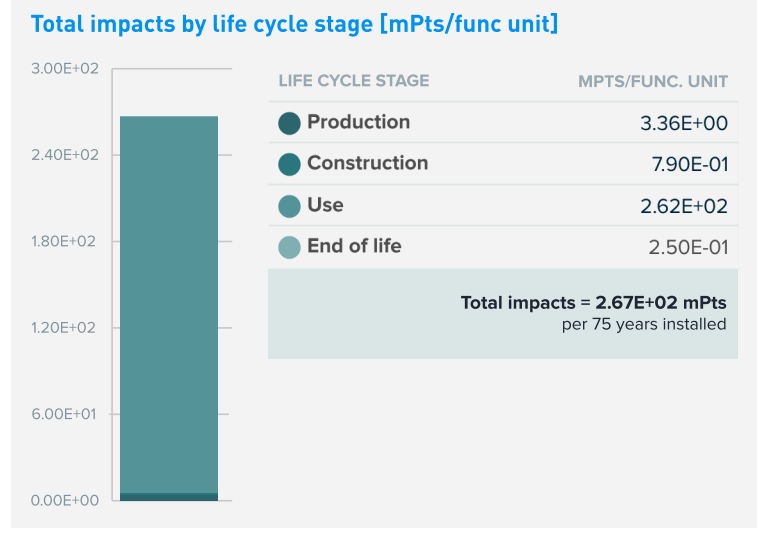

LCA results

LIFE CYCLE STAGE	PRODUCTION	CONSTRUCTION	USE	END OF LIFE
	(X) A1 Raw materials	(X) A4 Transportation/ Delivery	(X) B1 Use	(X) C1 Deconstruction/ Demolition
	(X) A2 Transportation	(X) A5 Construction/ Installation	(X) B2 Maintenance	(X) C2 Transportation
	(X) A3 Manufacturing		(X) B3 Repair	(X) C3 Waste processing
			(X) B4 Replacement	(X) C4 Disposal
			(X) B5 Refurbishment	
Information modules: Included (X) Excluded (MND)*			(X) B6 Operational energy use	
			(X) B7 Operational water use	
				

SM Single Score [mPts/func unit]

Toilet with 1.6 gpf tank	3.36 mPts	0.79 mPts	262.32 mPts	0.25 mPts
Materials or processes contributing >20% to total impacts in each life cycle stage	Ceramic parts production for the toilet tank and bowl.	Transportation of the product to installation site or consumer and disposal of packaging.	Water consumed during toilet operation.	Transport to waste processing and final disposal of the toilet in a landfill.

TRACI v2.1 results per functional unit - PROFLO® Calhoun 1500 Series Two-piece Toilet 1.6 gpf

LIFE CYCLE STAGE		PRODUCTION	CONSTRUCTION	USE	END OF LIFE
Ecological damage					
Impact category	Unit				
Global warming	kg CO ₂ eq	6.51E+01	1.30E+01	1.52E+03	5.67E+00
Ozone depletion	kg CFC-11 eq	1.06E-06	9.16E-07	6.96E-05	1.05E-06
Acidification	kg SO ₂ eq	2.65E-01	1.84E-01	7.46E+00	2.99E-02
Eutrophication	kg N eq	2.45E-02	8.81E-03	1.70E+01	3.53E-03
Human health damage					
Impact category	Unit				
Smog	kg O ₃ eq	4.06E+00	3.67E+00	7.63E+01	8.76E-01
Respiratory effects	kg PM _{2.5} eq	4.32E-02	1.04E-02	5.01E-01	3.50E-03
Additional environmental information					
Impact category	Unit				
Carcinogenics	CTU _h	2.64E-07	3.59E-08	4.68E-05	2.22E-09
Non-carcinogenics	CTU _h	5.98E-06	5.88E-07	9.50E-04	2.47E-07
Ecotoxicity	CTU _e	6.12E+01	8.60E+00	2.46E+03	1.02E+00
Fossil fuel depletion	MJ surplus	8.46E+01	2.29E+01	1.92E+03	1.02E+01

References

LCA Background Report
LCA background report of Ferguson single handle lavatory faucets & residential two-piece toilets, 2024; SimaPro Analyst 9.5; ecoinvent v3; TRACI 2.1.

ISO 14025, “Sustainability in buildings and civil engineering works -- Core rules for environmental product declarations of construction products and services”

ISO 21930:2017, "Sustainability in Building Construction — Environmental Declaration of Building Products" serves as the core PCR along with Sustainable Minds Part A.

SM Part A: LCA calculation rules and report requirements, version 2023
August, 2023. PCR review conducted by the Sustainable Minds TAB, tab@sustainableminds.com.

SM Part B: Residential toilets, v3.0
March, 2024. PCR reviewed for conformance to ISO 14025, ISO 21930:2017, and ACLCA PCR Open Standard v1.0 by Jack Geibig, Chair (Ecoform); Hugues Imbeault-Tétreault, ing., M.Sc.A. (Groupe AGÉCO); Rebe Feraldi, LCACP, CLAR (Pacific Northwest National Laboratory).

Download PDF SM Transparency Report/EPD

SM Transparency Reports (TR) are ISO 14025 Type III environmental declarations (EPD) that enable purchasers and users to compare the potential environmental performance of products on a life cycle basis. They are designed to present information transparently to make the limitations of comparability more understandable. Environmental declarations of products that conform to the same PCR and include the same life cycle stages, but are made by different manufacturers, may not sufficiently align to support direct comparisons. They therefore cannot be used as comparative assertions unless the conditions as defined in ISO 14025 Section 6.7.2. 'Requirements for Comparability' are satisfied. In order to support comparative assertions, this EPD meets all comparability requirements stated in ISO 14025:2006. However, differences in certain assumptions, data quality, and variability between LCA data sets may still exist. Any EPD comparison must be carried out at the building level per ISO 21930 guidelines, use the same sub-category PCR where applicable, include all relevant information modules, be limited to EPDs applying a functional unit, and be based on equivalent scenarios with respect to the context of construction works. Some LCA impact categories and inventory items are still under development and can have high levels of uncertainty. To promote uniform guidance on the data collection, calculation, and reporting of results, the ACLCA methodology (ACLCA 2019) was used.

Rating systems

The intent is to reward project teams for selecting products from manufacturers who have verified improved life-cycle environmental performance.

LEED BD+C: New Construction | v4 - LEED v4
Building product disclosure and optimization

<input type="radio"/> Industry-wide (generic) EPD	½ product
<input checked="" type="radio"/> Product-specific Type III EPD	1 product

LEED BD+C: New Construction | v4.1 - LEED v4.1
Building product disclosure and optimization

<input type="radio"/> Industry-wide (generic) EPD	1 product
<input checked="" type="radio"/> Product-specific Type III EPD	1.5 products

Collaborative for High Performance Schools National Criteria
MW C5.1 – Environmental Product Declarations

<input checked="" type="radio"/> Third-party certified type III EPD	2 points
---	----------

Green Globes for New Construction and Sustainable Interiors
Materials and resources

- ☒ NC 3.5.1.2 Path B: Prescriptive Path for Building Core and Shell
- ☒ NC 3.5.2.2 and SI 4.1.2 Path B: Prescriptive Path for Interior Fit-outs

BREEAM New Construction 2018
Mat 02 - Environmental impacts from construction products

<input type="radio"/> Industry-average EPD	.5 points
<input type="radio"/> Multi-product specific EPD	.75 points
<input checked="" type="radio"/> Product-specific EPD	1 point

SM Transparency Report (EPD)™ + Material Health Overview™

<div>EPD</div> <div>3rd-party reviewed</div> <div>Transparency Report (EPD)</div> <div>3rd-party verified</div> <div>Validity: 08/13/2024 – 08/12/2029</div> <div>FER – 20240813 – 002</div> <div>MATERIAL HEALTH</div> <div>Self-declared</div>	<div>LCA</div> <div><input checked="" type="radio"/></div> <div>Material evaluation</div> <div><input checked="" type="radio"/></div>	<div>This environmental product declaration (EPD) was externally verified by Industrial Ecology Consultants, according to ISO 21930:2017; SM Part A; SM Part B: Residential toilets; and ISO 14025:2006.</div> <div>Industrial Ecology Consultants 35 Bracebridge Rd Newton, MA 02459 www.industrial-ecology.com (617) 553-4929</div> <div>Industrial Ecology Consultants</div>	<div>SUMMARY</div> <div>Reference PCR</div> <div>SM Part B: Residential toilets, v3.0</div> <div>Regions; system boundaries</div> <div>North America; Cradle-to-grave</div> <div>Functional unit</div> <div>One residential toilet in an average residential environment used over the estimated service of the building</div> <div>LCIA methodology; LCA software;</div> <div>LCI database</div> <div>TRACI 2.1; SimaPro Analyst 9.5; ecoinvent v3.10 and US-EI 2.2 databases</div> <div>Public LCA</div> <div>LCA background report of Ferguson single handle lavatory faucets & residential two-piece toilets</div>	<div>FERGUSON</div> <div>751 Lakefront Commons Newport News, VA 23606 (800) 221-3379</div> <div>Contact us</div>
--	---	--	--	--

EPD additional content

Toilet with 1.28gpf tank	Toilet with 1.6gpf tank	EPD additional content	Material health	
--------------------------	-------------------------	------------------------	-----------------	--

Results

collected production data from the China facility. The toilet with 1.28gpf tank is represented by a production-weighted average of three bowl SKUs (PF1500WH, PF1501WH, and PF1503WH), five tank SKUs (PF6110WH, PF6121RW, PF612WH, PF6121WH, and PF614WH), and two toilet seat SKUs (PFTSE2000WH and PFTSWSC2000WH). The 1.6gpf tanks is represented by a production-weighted average of three bowl SKUs (PF1500WH, PF1501WH, and PF1503WH), one tank SKU (PF612KWH), and two toilet seat SKUs (PFTSE2000WH and PFTSWSC2000WH). Together, they represent the possible combinations of a PROFLO® Calhoun 1500 series two-piece toilet.

All unit processes were modeled using primary data from Ferguson's outsourced manufacturing facilities in combination with their internal operations


Allocation of multi-input and multi-output processes follows a mass-based approach in the collected data, which is the most appropriate for the unit

Cut-off criteria for the inclusion of mass and energy flows are 1% of renewable primary resource (energy) usage, 1% nonrenewable primary resource (energy)

impacts. The total of neglected input flows per module does not exceed 5% of energy usage, mass, and environmental impacts. The only exceptions to these criteria are substances with hazardous and toxic properties, which must be listed even when the known process unit is under the cut-off criterion of 1% of the total mass. No given flows are deliberately excluded from this declaration, and no substances considered to be hazardous or toxic according to the TRI or local regulations are present in the products. Therefore, these criteria have been met. Biogenic carbon is included in reported results.

- Maintenance and operation of su

- Human labor and employee transport
- Manufacture and transport of packaging not associated with final product
- Disposal of packaging materials not associated with the final product

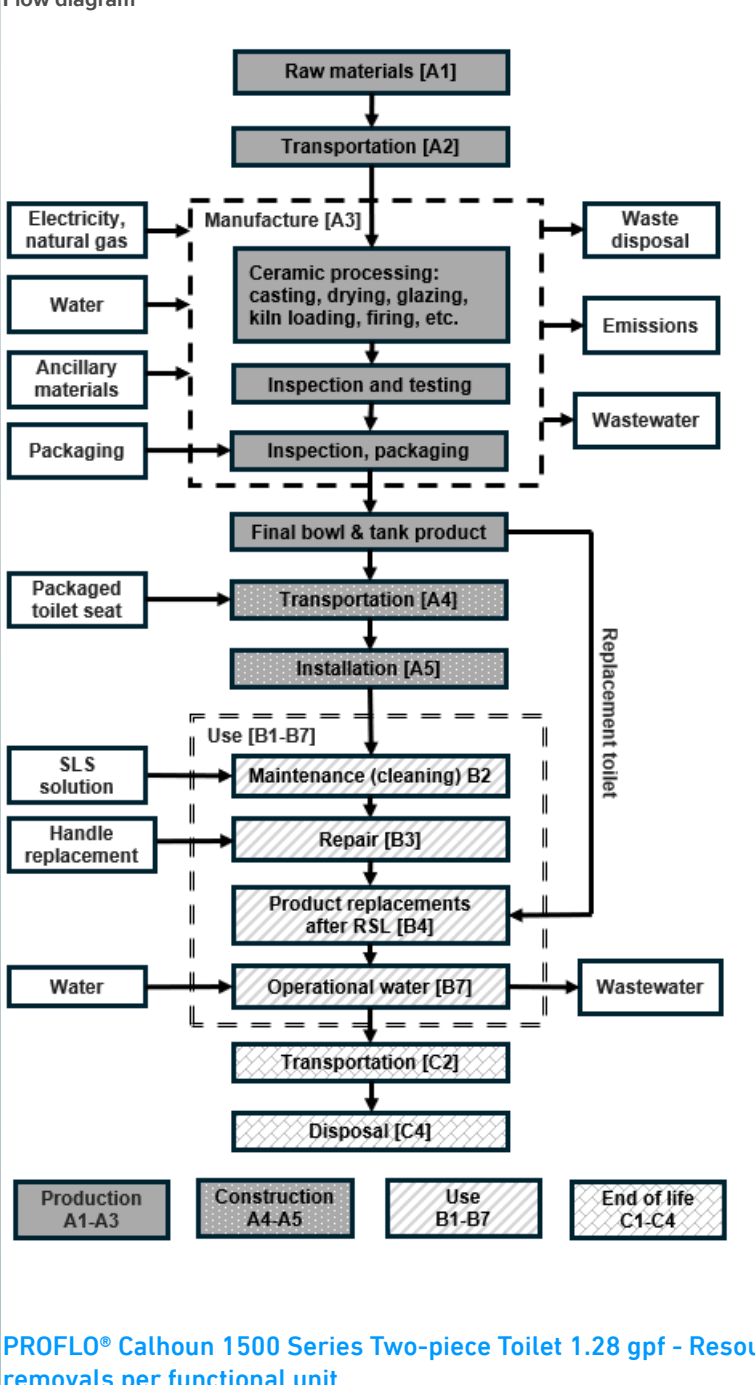

Parameters	Unit	A1-A3	A4-A5	B1	B2	B3	B4	B5	B6	B7	C1-C4	Total
Resource use indicators												
Renewable primary energy	MJ, 1000	4.18E+01	2.61E-01	0	7.67E+01	1.44E+00	1.16E+02	0	0	1.59E+03	1.61E-01	1.83E+03

Renewable primary resources with energy content used as material (RPR _m)	MJ, NCV	2.43E+01	0	0	0	0	5.82E+01	0	0	0	0	9.11E+01
Total use of renewable primary resources with energy content (RPR _{total})	MJ, NCV	6.61E+01	2.61E-01	0	7.67E+01	1.44E+00	1.16E+02	0	0	1.59E+03	1.61E-01	1.92E+03
Non-renewable primary resources used as an energy carrier (NRPR _e)	MJ, NCV	7.60E+02	1.36E+02	0	1.63E+01	0	4.47E+01	0	0	1.78E+04	6.87E+01	2.15E+04
Non-renewable primary resources with energy content used as material (NRPR _m)	MJ, NCV	9.41E+01	0	0	0	0	0	0	0	0	0	3.53E+02
Total use of non-renewable primary resources with energy content (NRPR _{total})	MJ, NCV	8.54E+02	1.36E+02	0	1.63E+01	0	4.47E+01	0	0	1.78E+04	6.87E+01	2.18E+04
Secondary materials (SM)	kg	0	0	0	0	0	0	0	0	0	0	0
Renewable secondary fuels (RSF)	MJ, NCV	0	0	0	0	0	0	0	0	0	0	0
Non-renewable secondary fuels (NRSF)	MJ, NCV	0	0	0	0	0	0	0	0	0	0	0
Recovered energy (RE)	MJ, NCV	0	0	0	0	0	0	0	0	0	0	0
Use of net fresh water resources (FW)	m ³	8.58E+01	1.00E+00	0	5.31E+00	6.05E+00	2.39E+02	0	0	5.36E+02	3.08E-01	8.74E+02
Output flows and waste category indicators												
Hazardous waste disposed (HWD)	kg	2.10E-02	0	0	0	0	5.78E-02	0	0	0	0	7.56E-02
Non-hazardous waste disposed (NHWD)	kg	0	2.98E-01	0	0	0	1.12E+02	0	0	0	4.03E+01	1.47E+02
High-level radioactive waste, conditioned, to final repository (HLRW)	kg	8.58E-03	1.12E-04	0	1.62E-04	4.34E-04	2.39E-02	0	1.80E+00	2.80E-01	1.42E-05	2.56E-01
Intermediate- and low-level radioactive waste, conditioned, to final repository (ILLRW)	kg	1.43E-03	6.09E-05	0	1.53E-07	2.76E-04	4.17E-03	0	5.98E+00	9.39E-01	3.04E-05	7.57E-01
Components for re-use (CRU)	kg	0	0	0	0	0	0	0	0	0	0	0
Materials for recycling (MR)	kg	5.13E+00	4.73E+00	0	4.74E+00	0	1.83E+01	0	0	0	0	2.41E+01
Materials for energy recovery (MER)	kg	5.29E-02	0	0	0	0	1.45E-01	0	0	0	0	1.90E-01
Exported energy (EE)	MJ	9.72E-01	0	0	0	0	2.67E+00	0	0	0	0	3.50E+00
Carbon emissions and removals												
Biogenic Carbon Removal from Product (BCRP)	kg CO ₂	0	0	0	0	0	0	0	0	0	0	0
Biogenic Carbon Emission from Product (BCEP)	kg CO ₂	0	0	0	0	0	0	0	0	0	0	0
Biogenic Carbon Removal from Packaging (BCRK)	kg CO ₂	3.46E+00	0	0	0	0	9.52E+00	0	0	0	0	1.30E+01
Biogenic Carbon Emission from Packaging (BCEK)	kg CO ₂	0	2.89E+00	0	0	0	7.99E+00	0	0	0	1.18E-02	1.09E+01
Biogenic Carbon Emission from Combustion of Waste from Renewable Sources Used in Production Processes (BCEW)	kg CO ₂	0	1.28E-01	0	0	0	3.52E-01	0	0	0	0	4.80E-01
Calcination Carbon Emissions (CCE)	kg CO ₂	0	0	0	0	0	0	0	0	0	0	0
Carbonation Carbon Removals (CCR)	kg CO ₂	0	0	0	0	0	0	0	0	0	0	0
Carbon Emissions from Combustion of Waste from Non-Renewable Sources used in Production Processes (CWNR)	kg CO ₂	0	0	0	0	0	0	0	0	0	0	0

PROFLO® Calhoun 1500 Series Two-piece Toilet 1.6 gpf - Resource use, output and waste flows, and carbon emissions & removals per functional unit

Parameters	SMT	PAS	APAS	E1	E2	E3	E4	E5	E6	E7	E1+E7	Total
Resource use indicators												
Renewable primary energy used as energ carrier (RPR.)	MJ, NCV	4.26E+01	3.99E-02	0	7.67E+01	1.58E+00	1.18E+02	0	0	1.99E+03	1.68E-01	2.23E+03

Renewable primary resources with energy content used as material (RPR _m)	MJ, NCV	2.43E+01	0	0	0	0	6.69E+01	0	0	0	0	9.13E+01
Total use of renewable primary resources with energy content (RPR _{total})	MJ, NCV	6.69E+01	3.99E-02	0	7.67E+01	1.58E+00	1.85E+02	0	0	1.99E+03	1.68E-01	2.32E+03
Non-renewable primary resources used as an energy carrier (NRPR _e)	MJ, NCV	7.82E+02	1.61E+02	0	1.63E+01	4.82E+01	2.79E+03	0	0	2.22E+04	7.14E+01	2.61E+04
Non-renewable primary resources with energy content used as material (NRPR _m)	MJ, NCV	9.44E+01	0	0	0	0	2.60E+02	0	0	0	0	3.54E+02
Total use of non-renewable primary resources with energy content (NRPR _{total})	MJ, NCV	8.76E+02	1.61E+02	0	1.63E+01	4.82E+01	3.05E+03	0	0	2.22E+04	7.14E+01	2.64E+04
Secondary materials (SM)	kg	0	0	0	0	0	0	0	0	0	0	0
Renewable secondary fuels (RSF)	MJ, NCV	0	0	0	0	0	0	0	0	0	0	0
Non-renewable secondary fuels (NRSF)	MJ, NCV	0	0	0	0	0	0	0	0	0	0	0
Recovered energy (RE)	MJ, NCV	0	0	0	0	0	0	0	0	0	0	0
Use of net fresh water resources (FW)	m ³	8.70E+01	1.03E+00	0	5.31E+00	0	2.43E+02	0	0	6.70E+02	3.08E-01	1.01E+03
Output flows and waste category indicators												
Hazardous waste disposed (HWD)	kg	2.10E-02	0	0	0	0	5.78E-02	0	0	0	0	7.88E-02
Non-hazardous waste disposed (NHWD)	kg	0	2.98E-01	0	0	0	1.12E+02	0	0	0	4.03E+01	1.52E+02
High-level radioactive waste, conditioned, to final repository (HLRW)	kg	8.58E-03	1.12E-04	0	1.62E-04	4.34E-04	2.39E-02	0	0	2.80E-01	1.42E-05	3.13E-01
Intermediate- and low-level radioactive waste, conditioned, to final repository (ILLRW)	kg	1.43E-03	6.09E-05	0	1.53E-07	2.76E-04	4.17E-03	0	0	9.39E-01	3.04E-05	9.45E-01
Components for re-use (CRU)	kg	0	0	0	0	0	0	0	0	0	0	0
Materials for recycling (MR)	kg	5.13E+00	1.51E+00	0	0	0	1.83E+01	0	0	0	0	2.49E+01
Materials for energy recovery (MER)	kg	5.29E-02	0	0	0	0	1.45E-01	0	0	0	0	1.98E-01
Exported energy (EE)	MJ	9.72E-01	0	0	0	0	2.67E+00	0	0	0	0	3.64E+00
Carbon emissions and removals												
Biogenic Carbon Removal from Product (BCRP)	kg CO ₂	0	0	0	0	0	0	0	0	0	0	0
Biogenic Carbon Emission from Product (BCEP)	kg CO ₂	0	0	0	0	0	0	0	0	0	0	0
Biogenic Carbon Removal from Packaging (BCRPK)	kg CO ₂	3.47E+00	0	0	0	0	9.53E+00	0	0	0	0	1.30E+01
Biogenic Carbon Emission from Packaging (BCEPK)	kg CO ₂	0	2.90E+00	0	0	0	8.00E+00	0	0	0	1.19E-02	1.09E+01
Biogenic Carbon Emission from Combustion of Waste from Renewable Sources Used in Production Processes (CBCEW)	kg CO ₂	0	1.28E-01	0	0	0	3.53E-01	0	0	0	0	4.80E-01
Calcination Carbon Emissions (CCE)	kg CO ₂	0	0	0	0	0	0	0	0	0	0	0
Carbonation Carbon Removals (CCR)	kg CO ₂	0	0	0	0	0	0	0	0	0	0	0
Carbon Emissions from Combustion of Waste from Non-Renewable Sources used in Production Processes (CWNR)	kg CO ₂	0	0	0	0	0	0	0	0	0	0	0
PROFLO® Calhoun 1500 Series Two-piece Toilet 1.28 gpf - LCIA results per functional unit												

0	kg			4.795						
---	----	--	--	-------	--	--	--	--	--	--

depletion	CT C-H eq	1.03E+00	3.32E+07	08	0	3.70E+08	3.31E+08	7.27E+08	0	0	4.89E+03	0	9.80E+07	08	3.89E+03	
Global warming	kg CO2 eq	6.32E+01	1.04E+01	6.81E-01	0	2.18E+00	2.35E+00	2.19E+02	0	0	1.03E+03	0	4.88E+00	0	5.91E-01	1.33E+03
Smog	kg O3 eq	3.93E+00	3.38E+00	4.01E-02	0	1.44E-01	1.10E-01	2.25E+01	0	0	4.19E+01	0	7.93E-01	0	5.04E-02	7.29E+01
Acidification	kg SO2 eq	2.57E-01	1.72E-01	1.42E-03	0	2.27E-02	7.93E-03	1.26E+00	0	0	4.89E+00	0	2.69E-02	0	1.78E-03	6.64E+00
Eutrophication	kg N eq	2.40E-02	7.13E-03	8.02E-04	0	3.08E-02	7.29E-04	9.72E-02	0	0	1.36E+01	0	2.76E-03	0	6.36E-04	1.37E+01
Carcinogenics	CTUh	2.59E-07	3.35E-08	5.11E-10	0	6.23E-08	1.15E-08	8.12E-07	0	0	3.67E-05	0	1.40E-09	0	7.49E-10	3.79E-05
Non-carcinogenics	CTUh	5.84E-06	5.00E-07	1.47E-08	0	3.07E-06	7.45E-08	1.81E-05	0	0	7.43E-04	0	2.33E-07	0	5.24E-09	7.70E-04
Respiratory effects	kg PM2.5 eq	4.19E-02	9.53E-03	1.60E-04	0	3.46E-03	1.17E-03	1.51E-01	0	0	2.71E-01	0	3.14E-03	0	2.22E-04	4.82E-01

Fossil fuel depletion	MJ surplus	8.27E+01	1.89E+01	4.65E-01	0	1.22E+00	5.33E+00	3.08E+02	0	0	1.27E+03	0	9.41E+00	0	3.73E-01	1.70E+03
PROFLO® Calhoun 1500 Series Two-piece Toilet 1.6 gpf - LCIA results per functional unit																
Impact category	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	Total
Ozone depletion	kg CFC-11 eq	1.06E-06	8.68E-07	4.80E-08	0	3.70E-08	3.65E-08	8.31E-06	0	0	6.12E-05	0	1.02E-06	0	3.07E-08	7.26E-05
Global warming	kg CO2 eq	6.51E+01	1.23E+01	6.82E-01	0	2.18E+00	2.52E+00	2.30E+02	0	0	1.29E+03	0	5.07E+00	0	6.03E-01	1.61E+03
Smog	kg O3 eq	4.06E+00	3.63E+00	4.01E-02	0	1.44E-01	1.18E-01	2.37E+01	0	0	5.23E+01	0	8.24E-01	0	5.23E-02	8.48E+01
Acidification	kg SO2 eq	2.65E-01	1.83E-01	1.42E-03	0	2.27E-02	8.56E-03	1.32E+00	0	0	6.11E+00	0	2.80E-02	0	1.85E-03	7.94E+00
Eutrophication	kg N eq	2.45E-02	8.01E-03	8.03E-04	0	3.08E-02	7.87E-04	1.01E-01	0	0	1.69E+01	0	2.87E-03	0	6.55E-04	1.71E+01
Carcinogenics	CTUh	2.64E-07	3.54E-08	5.11E-10	0	6.23E-08	1.23E-08	8.30E-07	0	0	4.59E-05	0	1.45E-09	0	7.72E-10	4.71E-05
Non-carcinogenics	CTUh	5.98E-06	5.73E-07	1.48E-08	0	3.07E-06	8.15E-08	1.87E-05	0	0	9.28E-04	0	2.42E-07	0	5.38E-09	9.57E-04
Respiratory effects	kg PM2.5 eq	4.32E-02	1.02E-02	1.60E-04	0	3.46E-03	1.27E-03	1.57E-01	0	0	3.39E-01	0	3.27E-03	0	2.30E-04	5.58E-01
Additional environmental information																
Ecotoxicity	CTUe	6.12E+01	8.55E+00	4.87E-02	0	8.22E+01	1.27E+00	1.95E+02	0	0	2.18E+03	0	6.52E-01	0	3.71E-01	2.53E+03
Fossil fuel depletion	MJ surplus	8.46E+01	2.24E+01	4.66E-01	0	1.22E+00	5.74E+00	3.24E+02	0	0	1.59E+03	0	9.78E+00	0	3.88E-01	2.04E+03



SM Transparency Report (EPD)™ + Material Health Overview™

EPD

3rd-party reviewed

Transparency Report (EPD)

3rd-party verified

Validity: 08/13/2024 – 08/12/2029
FER – 20240813 – 002

LCA

Material evaluation

This environmental product declaration (EPD) was externally verified by Industrial Ecology Consultants, according to ISO 21930:2017; SM Part A; SM Part B: Residential toilets; and ISO 14025:2006.

Industrial Ecology Consultants
35 Bracebridge Rd
Newton, MA 02459
www.industrial-ecology.com
(617) 553-4929



Industrial Ecology Consultants

SUMMARY

Reference PCR
SM Part B: Residential toilets, v3.0

Regions; system boundaries
North America; Cradle-to-grave

Functional unit
One residential toilet in an average residential environment used over the estimated service of the building

LCIA methodology; LCA software; LCI database
TRACI 2.1; SimaPro Analyst 9.5; ecoinvent v3.10 and US-EI 2.2 databases

Public LCA
LCA background report of Ferguson single handle lavatory faucets & residential two-piece toilets

FERGUSON

751 Lakefront Commons
Newport News, VA 23606
(800) 221-3379

Contact us

LCA & material health results & interpretation

PROFLO® Calhoun 1500 Series Toilet

- Toilet with 1.28gpf tank
- Toilet with 1.6gpf tank
- EPD additional content
- Material health

Evaluation programs

The Health Product Declaration®
The HPD Open Standard provides a consistent, and transparent format to accurately disclose the material contents and associated hazard classifications for a building product.

How it works
Material ingredients are screened and categorized according to the hazards that international governmental bodies and toxicology experts have associated with them, based on two listings:

- Authoritative lists maintained or recognized by government bodies
- Screening lists, which include chemicals that government bodies determined need further scrutiny, as well as chemical lists not recognized by any government body.

Assessment scope and results

Health Product Declaration®

PROFLO® Calhoun 1500 Series Toilet

Inventory threshold: 1000ppm

Full disclosure known hazards: Yes

Based on the selected content inventory threshold:

✓

Characterized

✓

Screened

✓

Identified

MASS SHARE

0.02%

0.21%

0.10%

7.03%

GreenScreen® List Translator Scores

●

List Translator Likely Benchmark 1 / Benchmark 1 ?

●

List Translator Possible Benchmark 1 ?

●

List Translator Benchmark Unknown ?

●

Benchmark 2 ?

●

Benchmark 3 ?

●

Benchmark 4 ?

●

No GS data available ?

[Learn about the GreenScreen® List Translator](#)

Total VOC Content?

VOC Content data is not applicable for this product category.

What's in this product and why

The primary ingredient for this product is ceramic material which contributes to the bulk of toilet tank and toilet bowl. Ceramics is a geological material, meets HPDC special conditions policy, and hazard screening is not applicable. There are some substances used in non-ceramic toilet components that show higher human health hazards as indicated in Pharos chemical and materials library. Some substances also appear on additional listings like Restricted list of Perkins & Will and Cradle to Cradle Products Innovation Institute (C2CPII), but this share is minimal.

Only about 0.3% of the product mass is scored either Benchmark 1 (BM1) or Possible Benchmark 1 (LT-P1). However, the user should not be concerned about interaction with the product. The hazards posed by alloy substances in the flush fittings are generally safe in their alloyed forms and the risk of exposure to harmful levels of these substances from regular use of toilet is extremely low. On the other hand, ingredients of rubber are chemically bound and are stable in the formation of rubber, so do not pose risk to human health.

How we're making it healthier

Rubber rings degrade and can release volatile compounds over time.

These are suggested to be replaced every 20 years which minimizes such possibility. Corrosion of metals could also release small amount of metals into the surrounding environment. The metal parts are to be replaced if there is any significant rust or degradation.

[See how we make it greener](#)

References

Health Product Declaration®

PROFLO® Calhoun 1500 Series Toilet

Health Product Declaration Open Standard - all versions
The standard provides guidance to accurately disclose the material contents of a building product using a standard, consistent, and transparent format.

Rating systems

LEED BD+C: New Construction | v4 - LEED v4

Building product disclosure and optimization

Material Ingredients

Credit value options

1 product each

✓

1. Reporting

2. Optimization

3. Supply Chain Optimization

LEED BD+C: New Construction | v4.1 - LEED v4.1

Materials and resources

Material Ingredients

Credit value options

1 product each

✓

1. Reporting

2. Optimization

3. Supply Chain Optimization

Living Building Challenge

Materials petals imperatives

10. Red List Free

12. Responsible Industry

13. Living Economy Sourcing

WELL Building Standard®

Air and Mind Features

✓

X07 Materials Transparency

X08 Materials Optimization

Collaborative for High Performance Schools National Criteria

EQ C7.1 Material Health Disclosures

✓


Performance Approach

2 points

✓

Prescriptive Approach

2 points



SM Transparency Report (EPD)™ + Material Health Overview™

EPD

3rd-party reviewed

Transparency Report (EPD)


3rd-party verified

Validity: 08/13/2024 – 08/12/2029
FER – 20240813 – 002

LCA

This environmental product declaration (EPD) was externally verified by Industrial Ecology Consultants, according to ISO 21930:2017; SM Part A; SM Part B: Residential toilets; and ISO 14025:2006.

Industrial Ecology Consultants
35 Bracebridge Rd
Newton, MA 02459
www.industrial-ecology.com
(617) 553-4929



Industrial Ecology Consultants

SUMMARY

Reference PCR
SM Part B: Residential toilets, v3.0

Regions; system boundaries
North America; Cradle-to-grave

Functional unit
One residential toilet in an average residential environment used over the estimated service of the building

LCIA methodology; LCA software; LCI database
TRACI 2.1; SimaPro Analyst 9.5; ecoinvent v3.10 and US-EI 2.2 databases

Public LCA
LCA background report of Ferguson single handle lavatory faucets & residential two-piece toilets

FERGUSON

751 Lakefront Commons
Newport News, VA 23606
(800) 221-3379

Contact us

© 2024 | The SM Transparency Report [EPD]™ Program is operated by Sustainable Minds® (www.sustainableminds.com) | Privacy policy

How we make it greener

PROFLO® Calhoun 1500 Series Toilet

Expand all

PRODUCTION

During the production of toilets, unqualified semi-finished and finished products can be almost 100% recycled, and unqualified wet billet can be directly returned to the batching workshop to prepare new mud. Ceramics are directly crushed and reused for mud preparation where possible.

Current Ferguson production processes mainly use natural gas. However, the use of solar power is under consideration to promote sustainable development. The local government in the area where the toilet production facility is located has begun the construction of solar power generation systems, which will be used in the production of sanitary ceramics in order to reduce the use of natural gas and other energy inputs.



TRANSPORTATION

Ferguson is making efforts to reduce the total transportation distance required for its upstream transportation and distribution activities. These efforts include local sourcing and the use of multiple distribution centers.

For example, the main raw materials used in sanitary ceramic production are washed mud, feldspar, and porcelain stone powder. These raw materials are sourced from locations close to the manufacturing facility, and the port for shipment to the US is close by.



END OF LIFE

Ferguson is working to make end-of-life disposal pathways more sustainable for all its product offerings across multiple product categories. For example, waste sanitary ceramics can be broken into ceramic fragments or powder, which can be used to manufacture building materials such as ceramic tile adhesives and cement additives.

Processing waste sanitary ceramics into fine particles can produce raw materials for the production of green building materials, such as concrete additives used for environmentally friendly lightweight partition panels, road bricks, etc. While this is not yet commonplace, these practices would reduce the emissions associated with landfill and improve the potential environmental performance of building materials.



SM Transparency Report (EPD)™ + Material Health Overview™

EPD

LCA

3rd-party reviewed



Transparency Report (EPD)

3rd-party verified



Validity: 08/13/2024 – 08/12/2029
FER – 20240813 – 002

MATERIAL HEALTH

Material
evaluation

Self-declared



This environmental product declaration (EPD) was externally verified by Industrial Ecology Consultants, according to ISO 21930:2017; SM Part A; SM Part B: Residential toilets; and ISO 14025:2006.

Industrial Ecology Consultants
35 Bracebridge Rd
Newton, MA 02459
www.industrial-ecology.com

(617) 553-4929



Industrial Ecology Consultants

SUMMARY

Reference PCR

SM Part B: Residential toilets, v3.0

Regions; system boundaries

North America; Cradle-to-grave

Functional unit

One residential toilet in an average residential environment used over the estimated service of the building

LCIA methodology; LCA software; LCI database

TRACI 2.1; SimaPro Analyst 9.5; ecoinvent v3.10 and US-EI 2.2 databases

Public LCA

LCA background report of Ferguson single handle lavatory faucets & residential two-piece toilets

FERGUSON

751 Lakefront Commons
Newport News, VA 23606
(800) 221-3379

Contact us