

# TOTO®

## Ultramax®

MS854114E - Eco Ultramax  
MS604124CEFG - Ultramax II  
MS604124CUFG - Ultramax II 1G®

Beautifully engineered in a single unit, the Ultramax HET incorporates thoughtful innovation with simple elegant design and TOTO's dedication to respecting water. The Ultramax HET offers sleek lines, is simple to install, and features performance design that focuses on your comfort. Choose the Eco Ultramax which utilizes TOTO's E-max flushing system or the Universal Height Ultramax II with TOTO's Tornado Flush™ system, available in 1.28gpf or 1G options.



### Performance dashboard

#### Features & functionality

- Wide 3" flush valve is 125% larger than conventional 2" flush valves
- Wide 2-1/8" computer designed, fully glazed trapway
- Sleek, high profile one-piece toilet
- Complete with SoftClose® seat, or upgrade to Washlet®
- ADA compliant (Ultramax II and Ultramax II 1G)

#### Visit TOTO for more product specifications:

- Eco Ultramax – [MS854114E](#)
- Ultramax II – [MS604124CEFG](#)
- Ultramax II 1G – [MS604124CUFG](#)

[See ecomedes for water & energy calculations](#)

#### Environment & materials

##### Improved by:

- Lower water use
- 50% of all electricity from renewable resources
- Kiln exhaust heat reused to power product dryers
- Upcycling of post industrial porcelain waste into ceramic floor tile

##### Certifications, rating systems & disclosures:

- WaterSense® certified
- CALGreen® compliant
- Declare™ label
- Contributes to earning credits in LEED®

MasterFormat® #22 41 13.13

#### Check spec sheets for these products

[Eco Ultramax](#), [Ultramax II](#), [Ultramax II 1G](#)

For spec help call (888) 295-8134



**TOTO PeoplePlanetWater Smart Fact:**  
The Drake High Efficiency Toilet employs the E-Max flushing system, a simple and quiet solution for effectively flushing, offering an additional water savings of 20%.

[See LCA, interpretation & rating systems](#)

[See materials, interpretation & rating systems](#)



## SM Transparency Report (EPD)™ + Material Health Overview™

### EPD LCA

3rd-party reviewed

Transparency Report (EPD)

3rd-party verified

Validity: 08/31/2024 – 08/30/2029  
TOTO – 20240831 – 005

### MATERIAL HEALTH Material evaluation

Self-declared

This environmental product declaration (EPD) was externally verified by Jack Geibig (Ecoform) on behalf of NSF according to ISO 14044; ISO 21930:2017; SM Part A: LCA calculation rules and report requirements, 2023; the reference PCR; and ISO 14025:2006.

**Ecoform, LLC**  
11903 Black Road  
Knoxville, TN 37932  
(865) 850-1883  
[www.ecoform.com](http://www.ecoform.com)

**NSF International**  
P.O Box 130140, 789 N.Dixboro Road,  
Ann Arbor, MI 48105, USA  
[www.nsf.org](http://www.nsf.org)  
734 769 8010



**Certified Environmental Product Declaration**  
[www.nsf.org](http://www.nsf.org)

### SUMMARY

**Reference PCR**  
SM Part B: Residential toilets, v3.0

**Regions; system boundaries**  
North America; Cradle-to-grave

**Functional unit**  
One single toilet in an average residential environment without an electronic bidet seat, over the estimated service life of the building

**LCA methodology; LCA software; LCI database**  
TRACI 2.1; SimaPro Analyst 9.5; ecoinvent and USLCI databases

In accordance with ISO 14044 and the referenced PCR, the life cycle assessment was conducted by Sustainable Minds and critically reviewed by Jack Geibig (Ecoform) on behalf of NSF.

### Public LCA

LCA background report of TOTO Faucets, Flush Valves, and Residential Toilets, 2024

### TOTO USA

1155 Southern Road  
Morrow, GA 30260  
[www.totousa.com](http://www.totousa.com)

Contact us

## LCA results & interpretation

Ultramax®

Eco Ultramax® 1.28gpf

Ultramax II 1G®

Ultramax® II 1.28gpf

EPD additional content

Material health

### Scope and summary

- Cradle to gate  Cradle to gate with options  Cradle to grave

#### Functional unit

One single flush toilet in an average residential environment without an electronic bidet seat. The expected service life (ESL) of a building is 75 years, and all use stage activity and impacts are accounted for in that full ESL period. The reference service life (RSL) of the toilet is 20 years, which is an industry-accepted average lifespan based on the economic lifespan of the product.

#### Maintenance

Regular cleaning is assumed to use 1.69 fl oz (50mL) of a 1% sodium lauryl sulfate (SLS) solution twice per month for 75 years, which is the building estimated service life. The use of 50mL/clean over 24cleans/year for 75 years gives a total of 90L of solution. Using a density of 1.01kg/L for a 1% SLS solution, 90kg of solution will be needed over the course of 75 years. Therefore, 0.9kg of SLS plus 90kg of water were included in the model.

#### Repair and replacement

The trip lever handle, flapper seal, and fill valve seal are assumed to be replaced once during each 20-year RSL period as part of regular repairs. At the end of its RSL, the residential toilet is assumed to be replaced. Therefore, an additional 2.75 products are included as replacements, with all life cycle modules considered, over the building's ESL of 75 years.

#### Operational water use

The amount of water used by the toilet depends on its flush rate. The 1.28gpf toilet consumes 1.28 gallons per flush and is assumed to be used 13 times per day over 75 years, resulting in 455,520 gallons of water over its lifetime. An electricity factor of 0.000961 kWh per liter of water is used to represent energy for upstream municipal water collection, treatment, supply, and downstream management.

#### Manufacturing data

Manufacturing data has been collected and compiled for TOTO Mexico. Data reporting period: 2023.

#### Material composition greater than 1% by weight

PART	MATERIAL	% WT.
Tank and bowl	Ceramic	76.4%
Packaging	Corrugated board, paper inserts	11.3%
Seat	Polypropylene	5.3%
Other	Fittings & tank components	7.0%

### What's causing the greatest impacts

#### All life cycle stages

The use stage [B1-B7] dominates the results for all impact categories. The replacements module [B4] is highly dominant in all categories because of the amount of water consumed during operation and the necessity to consider an additional 2.75 products as replacements. All life cycle modules are considered throughout the estimated service life (ESL) of the building, which is 75 years. The production stage [A1-A3] itself is slightly significant but does not dominate in any impact category. Additionally, the processes associated with dismantling the product and final waste treatment during the end-of-life stage do not have a significant impact.

#### Production stage [A1-A3]

The ceramic parts dominate all impact categories in the production stage except for eutrophication where corrugated board and brass parts also have major contributions. Injection molding and turning brass processes have significant contribution to the ozone depletion impact category while zinc parts have significant contribution to the non-carcinogenics. The other parts and processes contribute between 1% and 19% of the overall impacts in the remaining categories.

#### Construction stage [A4-A5]

Installation of the product dominates impacts in the construction stage.

Transportation by truck for delivery to the installation site contributes the most, and this stage contributes less than 1% of the total global warming potential impacts throughout the product's life cycle.

#### Use stage [B1-B7]

Product replacements dominate impacts in the use stage. The use stage itself dominates all impact categories (>96%) due to the consideration of an additional 2.75 products as replacements.

#### End-of-life stage [C1-C4]

The transportation to landfill dominates impacts in the end-of-life stage.

Transportation and the processes for dismantling the product contribute to a relatively low portion (<1%) of total results for all impact categories.





#### How we're making it greener

TOTO PeoplePlanetWater™ programs improving environmental performance

- Dual-Max®, E-Max®, Tornado Flush™, 1G®, and EcoPower® reduce water consumption in the use phase
- Energy efficiency programs optimize the firing process
- Modular packing methods increase the fill rate of a trailer, cutting down on the number of trips needed
- 100% of post-industrial ceramic waste is recycled

See how we make it greener

### LCA results

LIFE CYCLE STAGE	PRODUCTION	CONSTRUCTION	USE	END OF LIFE
	(X) A1 Raw materials	(X) A4 Transportation/Delivery	(X) B1 Use	(X) C1 Deconstruction/Demolition
	(X) A2 Transportation	(X) A5 Construction/Installation	(X) B2 Maintenance	(X) C2 Transportation
	(X) A3 Manufacturing		(X) B3 Repair	(X) C3 Waste processing
			(X) B4 Replacement	(X) C4 Disposal
			(X) B5 Refurbishment	
			(X) B6 Operational energy use	
			(X) B7 Operational water use	
Information modules: Included (X)   Excluded (MND)*				

### SM Single Score

Impacts per toilet	5.23 mPts	1.34 mPts	450 mPts	0.068 mPts
Materials or processes contributing >20% to total impacts in each life cycle stage	Ceramic parts production as well as well zinc and brass parts together with zinc turning process.	Transportation of the product to installation site or consumer and disposal of packaging.	Volume of water used during operation and the number of product replacements needed over the building's service life.	Transport to waste processing and disposal of material flows transported to a landfill.

### Eco Ultramax® 1.28gpf - TRACI v2.1 results per functional unit

LIFE CYCLE STAGE	PRODUCTION	CONSTRUCTION	USE	END OF LIFE
------------------	------------	--------------	-----	-------------

#### Ecological damage

Impact category	Unit	Production	Construction	Use	End of Life
Global warming	kg CO <sub>2</sub> eq	7.57E+01	1.02E+01	6.14E+03	8.01E-01
Ozone depletion	kg CFC-11 eq	1.19E-05	1.29E-07	3.24E-04	1.11E-07
Acidification	kg SO <sub>2</sub> eq	2.55E-01	3.32E-01	3.16E+01	4.93E-03
Eutrophication	kg N eq	5.14E-02	2.40E-02	3.62E+00	4.09E-04

#### Human health damage

Impact category	Unit	Production	Construction	Use	End of Life
Smog	kg O <sub>3</sub> eq	3.70E+00	1.15E+01	3.21E+02	1.41E-01
Respiratory effects	kg PM <sub>2.5</sub> eq	2.24E-02	3.80E-03	2.12E+00	2.77E-04

#### Additional environmental information

Impact category	Unit	Production	Construction	Use	End of Life
Carcinogenics	CTU <sub>h</sub>	7.04E-07	1.21E-07	1.23E-04	9.98E-09
Non-carcinogenics	CTU <sub>h</sub>	1.42E-05	1.14E-06	5.95E-04	8.06E-08
Fototoxicity	CTU <sub>e</sub>	4.28E+01	2.15E+01	2.31E+03	1.35E+00
Fossil fuel depletion	MJ surplus	1.66E+02	1.58E+01	4.61E+03	1.90E+00

### References

#### LCA Background Report

LCA background report of TOTO Faucets, Flush Valves, and Residential Toilets, 2024; SimaPro Analyst 9.5; ecoinvent and USLCl databases; TRACI 2.1.

ISO 14025, "Sustainability in buildings and civil engineering works -- Core rules for environmental product declarations of construction products and services"

ISO 21930:2017, "Sustainability in Building Construction -- Environmental Declaration of Building Products" serves as the core PCR along with Sustainable Minds Part A.

#### SM Part A: LCA calculation rules and report requirements, version 2023

August, 2023. PCR review conducted by the Sustainable Minds TAB, tab@sustainableminds.com.

#### SM Part B: Residential toilets, v3.0

March, 2024. PCR review conducted by Jack Geibig, Chair (Ecoform) Jgeibig@ecoform.com; Hugues Imbeault-Tétreault, ing., M.Sc.A. (Groupe AGÉCO); Rebe Feraldi, LCACP, CLAR (Pacific Northwest National Laboratory).

#### Download PDF SM Transparency Report/EPD

SM Transparency Reports (TR) are ISO 14025 Type III environmental declarations (EPD) that enable purchasers and users to compare the potential environmental performance of products on a life cycle basis. They are designed to present information transparently to make the limitations of comparability more understandable. Environmental declarations of products that conform to the same PCR and include the same life cycle stages, but are made by different manufacturers, may not sufficiently align to support direct comparisons. They therefore cannot be used as comparative assertions unless the conditions as defined in ISO 14025 Section 6.7.2. "Requirements for Comparability" are satisfied. In order to support comparative assertions, this EPD meets all comparability requirements stated in ISO 14025:2006. However, differences in certain assumptions, data quality, and variability between LCA data sets may still exist. Any EPD comparison must be carried out at the building level per ISO 21930 guidelines, use the same sub-category PCR where applicable, include all relevant information modules, be limited to EPDs applying a functional unit, and be based on equivalent scenarios with respect to the context of construction works. Some LCA impact categories and inventory items are still under development and can have high levels of uncertainty. To promote uniform guidance on the data collection, calculation, and reporting of results, the ACLCA methodology (ACLCA 2019) was used.

### Rating systems

The intent is to reward project teams for selecting products from manufacturers who have verified improved life-cycle environmental performance.

#### LEED BD+C: New Construction | v4 - LEED v4

Building product disclosure and optimization

#### Environmental product declarations

- Industry-wide (generic) EPD ½ product
- Product-specific Type III EPD 1 product

#### LEED BD+C: New Construction | v4.1 - LEED v4.1

Building product disclosure and optimization

#### Environmental product declarations

- Industry-wide (generic) EPD 1 product
- Product-specific Type III EPD 1.5 products

#### Collaborative for High Performance Schools National Criteria

##### MW C5.1 – Environmental Product Declarations

- Third-party certified type III EPD 2 points

#### Green Globes for New Construction and Sustainable Interiors

##### Materials and resources

- NC 3.5.1.2 Path B: Prescriptive Path for Building Core and Shell
- NC 3.5.2.2 and SI 4.1.2 Path B: Prescriptive Path for Interior Fit-outs

#### BREEAM New Construction 2018

Mat 02 - Environmental impacts from construction products

#### Environmental Product Declarations (EPD)

- Industry-average EPD .5 points
- Multi-product specific EPD .75 points
- Product-specific EPD 1 point

## SM Transparency Report (EPD)™ + Material Health Overview™

EPD	LCA
3rd-party reviewed	<input checked="" type="checkbox"/> NSF
Transparency Report (EPD)	
3rd-party verified	<input checked="" type="checkbox"/> NSF
Validity: 08/31/2024 – 08/30/2029	
TOTO – 20240831 – 005	
MATERIAL HEALTH	Material evaluation
Self-declared	<input checked="" type="checkbox"/>

This environmental product declaration (EPD) was externally verified by Jack Geibig (Ecoform) on behalf of NSF according to ISO 14044; ISO 21930:2017; SM Part A: LCA calculation rules and report requirements, 2023; and ISO 14025:2006.

Ecoform, LLC  
11903 Black Road  
Knoxville, TN 37932  
(865) 850-1883  
www.ecoform.com

NSF International  
P.O. Box 130140, 789 N.Dixboro Road,  
Ann Arbor, MI 48105, USA  
www.nsf.org  
734 769 8010



#### SUMMARY

Reference PCR  
SM Part B: Residential toilets, v3.0

Regions: system boundaries  
North America; Cradle-to-grave

#### Functional unit

One single toilet in an average residential environment without an electronic bidet seat, over the estimated service life of the building

#### LCA methodology; LCA software; LCI database

TRACI 2.1; SimaPro Analyst 9.5; ecoinvent and USLCl databases

In accordance with ISO 14044 and the referenced PCR, the life cycle assessment was conducted by Sustainable Minds and critically reviewed by Jack Geibig (Ecoform) on behalf of NSF.

#### Public LCA

LCA background report of TOTO Faucets, Flush Valves, and Residential Toilets, 2024

TOTO USA  
1155 Southern Road  
Morrow, GA 30260  
www.totousa.com

Contact us

## LCA results & interpretation

Ultramax®

Eco Ultramax® 1.28gpf

**Ultramax II 1G®**

Ultramax® II 1.28gpf

EPD additional content

Material health

### Scope and summary

- Cradle to gate  Cradle to gate with options  Cradle to grave

#### Functional unit

**One single flush toilet** in an average residential environment without an electronic bidet seat. The expected service life (ESL) of a building is 75 years, and all use stage activity and impacts are accounted for in that full ESL period. The reference service life (RSL) of the toilet is 20 years, which is an industry-accepted average lifespan based on the economic lifespan of the product.

#### Maintenance

Regular cleaning is assumed to use 1.69 fl oz (50mL) of a 1% sodium lauryl sulfate (SLS) solution twice per month for 75 years, which is the building estimated service life. The use of 50mL/clean over 24cleans/year for 75 years gives a total of 90L of solution. Using a density of 1.01kg/L for a 1% SLS solution, 90kg of solution will be needed over the course of 75 years. Therefore, 0.9kg of SLS plus 90kg of water were included in the model.

#### Repair and replacement

The trip lever handle, flapper seal, and fill valve seal are assumed to be replaced once during each 20-year RSL period as part of regular repairs. At the end of its RSL, the residential toilet is assumed to be replaced. Therefore, an additional 2.75 products are included as replacements, with all life cycle modules considered, over the building's ESL of 75 years.

#### Operational water use

The amount of water used by the toilet depends on its flush rate. The 1G® toilet consumes 1 gallon per flush and is assumed to be used 13 times per day over 75 years, resulting in 355,875 gallons of water over its lifetime. An electricity factor of 0.000961 kWh per liter of water is used to represent energy for upstream municipal water collection, treatment, supply, and downstream management.

#### Manufacturing data

Manufacturing data has been collected and compiled for TOTO Thailand and Morrow. **Data reporting period:** 2023.

#### Material composition greater than 1% by weight

PART	MATERIAL	% WT.
Tank and bowl	Ceramic	79.8%
Packaging	Corrugated board, paper inserts	9.5%
Seat	Polypropylene	4.1%
Other	Fittings & tank components	6.7%

### What's causing the greatest impacts

#### All life cycle stages

The use stage [B1-B7] dominates the results for all impact categories. The replacements module [B4] is highly dominant in all categories because of the amount of water consumed during operation and the necessity to consider an additional 2.75 products as replacements. All life cycle modules are considered throughout the estimated service life (ESL) of the building, which is 75 years. The production stage [A1-A3] itself is slightly significant but does not dominate in any impact category. Additionally, the processes associated with dismantling the product and final waste treatment during the end-of-life stage do not have a significant impact.

#### Production stage [A1-A3]

The ceramic parts dominate all impact categories in the production stage except for eutrophication where corrugated board and brass parts also have major contributions. Injection molding and turning brass processes have significant contribution to the ozone depletion impact category while zinc parts have significant contribution to the non-carcinogenics. The other parts and processes contribute between 1% and 19% of the overall impacts in the remaining categories.

#### Construction stage [A4-A5]

Installation of the product dominates impacts in the construction stage. Transportation by truck for delivery to the installation site contributes the most, and this stage contributes less than 1% of the total global warming potential impacts throughout the product's life cycle.

#### Use stage [B1-B7]

Product replacements dominate impacts in the use stage. The use stage itself dominates all impact categories (>96%) due to the consideration of an additional 2.75 products as replacements.

#### End-of-life stage [C1-C4]

The transportation to landfill dominates impacts in the end-of-life stage. Transportation and the processes for dismantling the product contribute to a relatively low portion (<1%) of total results for all impact categories.





#### How we're making it greener

TOTO PeoplePlanetWater™ programs improving environmental performance

- Dual-Max®, E-Max®, Tornado Flush™, 1G®, and EcoPower® reduce water consumption in the use phase
- Energy efficiency programs optimize the firing process
- Modular packing methods increase the fill rate of a trailer, cutting down on the number of trips needed
- 100% of post-industrial ceramic waste is recycled

[See how we make it greener](#)

### LCA results

LIFE CYCLE STAGE	PRODUCTION	CONSTRUCTION	USE	END OF LIFE
	(X) A1 Raw materials	(X) A4 Transportation/Delivery	(X) B1 Use	(X) C1 Deconstruction/Demolition
	(X) A2 Transportation	(X) A5 Construction/Installation	(X) B2 Maintenance	(X) C2 Transportation
	(X) A3 Manufacturing		(X) B3 Repair	(X) C3 Waste processing
			(X) B4 Replacement	(X) C4 Disposal
			(X) B5 Refurbishment	
			(X) B6 Operational energy use	
			(X) B7 Operational water use	
<b>Information modules:</b> Included (X)   Excluded (MND)*				

### SM Single Score

Impacts per toilet	8.27 mPts	1.20 mPts	375 mPts	0.079 mPts
<b>Materials or processes contributing &gt;20% to total impacts in each life cycle stage</b>	Ceramic parts production as well as well zinc and brass parts together with zinc turning process.	Transportation of the product to installation site or consumer and disposal of packaging.	Volume of water used during operation and the number of product replacements needed over the building's service life.	Transport to waste processing and disposal of material flows transported to a landfill.

### Ultramax II 1G® - TRACI v2.1 results per functional unit

LIFE CYCLE STAGE	PRODUCTION	CONSTRUCTION	USE	END OF LIFE
------------------	------------	--------------	-----	-------------

#### Ecological damage

Impact category	Unit				
Global warming	kg CO <sub>2</sub> eq	1.11E+02	9.19E+00	5.09E+03	9.26E-01
Ozone depletion	kg CFC-11 eq	6.03E-06	1.29E-07	2.35E-04	1.14E-07
Acidification	kg SO <sub>2</sub> eq	4.01E-01	3.36E-01	2.60E+01	5.61E-03
Eutrophication	kg N eq	7.26E-02	2.58E-02	3.02E+00	4.61E-04

#### Human health damage

Impact category	Unit				
Smog	kg O <sub>3</sub> eq	6.57E+00	1.16E+01	2.77E+02	1.61E-01
Respiratory effects	kg PM <sub>2.5</sub> eq	3.68E-02	3.94E-03	1.77E+00	2.92E-04

#### Additional environmental information

Impact category	Unit				
Carcinogenics	CTU <sub>h</sub>	1.44E-06	9.16E-08	1.01E-04	1.16E-08
Non-carcinogenics	CTU <sub>h</sub>	2.13E-05	8.62E-07	5.28E-04	9.60E-08
Ecotoxicity	CTU <sub>e</sub>	7.41E+01	1.61E+01	2.03E+03	1.63E+00
Fossil fuel depletion	MJ surplus	1.95E+02	1.19E+01	3.97E+03	2.12E+00

### References

#### LCA Background Report

LCA background report of TOTO Faucets, Flush Valves, and Residential Toilets, 2024; SimaPro Analyst 9.5; ecoinvent and USLCI databases; TRACI 2.1.

ISO 14025, "Sustainability in buildings and civil engineering works -- Core rules for environmental product declarations of construction products and services"

ISO 21930:2017, "Sustainability in Building Construction -- Environmental Declaration of Building Products" serves as the core PCR along with Sustainable Minds Part A.

#### SM Part A: LCA calculation rules and report requirements, version 2023

August, 2023. PCR review conducted by the Sustainable Minds TAB, tab@sustainableminds.com.

#### SM Part B: Residential toilets, v3.0

March, 2024. PCR review conducted by Jack Geibig, Chair (Ecoform) jgeibig@ecoform.com; Hugues Imbeault-Tétreault, ing., M.Sc.A. (Groupe AGÉCO); Rebe Feraldi, LCACP, CLAR (Pacific Northwest National Laboratory).

#### Download PDF SM Transparency Report/EPD

SM Transparency Reports (TR) are ISO 14025 Type III environmental declarations (EPD) that enable purchasers and users to compare the potential environmental performance of products on a life cycle basis. They are designed to present information transparently to make the limitations of comparability more understandable. Environmental declarations of products that conform to the same PCR and include the same life cycle stages, but are made by different manufacturers, may not sufficiently align to support direct comparisons. They therefore cannot be used as comparative assertions unless the conditions as defined in ISO 14025 Section 6.7.2. "Requirements for Comparability" are satisfied. In order to support comparative assertions, this EPD meets all comparability requirements stated in ISO 14025:2006. However, differences in certain assumptions, data quality, and variability between LCA data sets may still exist. Any EPD comparison must be carried out at the building level per ISO 21930 guidelines, use the same sub-category PCR where applicable, include all relevant information modules, be limited to EPDs applying a functional unit, and be based on equivalent scenarios with respect to the context of construction works. Some LCA impact categories and inventory items are still under development and can have high levels of uncertainty. To promote uniform guidance on the data collection, calculation, and reporting of results, the ACLCA methodology (ACLCA 2019) was used.

### Rating systems

The intent is to reward project teams for selecting products from manufacturers who have verified improved life-cycle environmental performance.

#### LEED BD+C: New Construction | v4 - LEED v4

Building product disclosure and optimization

#### Environmental product declarations

- Industry-wide (generic) EPD ½ product
- Product-specific Type III EPD 1 product

#### LEED BD+C: New Construction | v4.1 - LEED v4.1

Building product disclosure and optimization

#### Environmental product declarations

- Industry-wide (generic) EPD 1 product
- Product-specific Type III EPD 1.5 products

#### Collaborative for High Performance Schools National Criteria

##### MW C5.1 – Environmental Product Declarations

- Third-party certified type III EPD 2 points

#### Green Globes for New Construction and Sustainable Interiors

##### Materials and resources

- NC 3.5.1.2 Path B: Prescriptive Path for Building Core and Shell
- NC 3.5.2.2 and SI 4.1.2 Path B: Prescriptive Path for Interior Fit-outs

#### BREEAM New Construction 2018

Mat 02 - Environmental impacts from construction products

#### Environmental Product Declarations (EPD)

- Industry-average EPD .5 points
- Multi-product specific EPD .75 points
- Product-specific EPD 1 point

## SM Transparency Report (EPD)™ + Material Health Overview™

EPD	LCA
3rd-party reviewed	<input checked="" type="checkbox"/> NSF
Transparency Report (EPD)	
3rd-party verified	<input checked="" type="checkbox"/> NSF
Validity: 08/31/2024 – 08/30/2029 TOTO – 20240831 – 005	
MATERIAL HEALTH	Material evaluation
Self-declared	<input checked="" type="checkbox"/>

This environmental product declaration (EPD) was externally verified by Jack Geibig (Ecoform) on behalf of NSF according to ISO 14044; ISO 21930:2017; SM Part A: LCA calculation rules and report requirements, 2023; the reference PCR; and ISO 14025:2006.

Ecoform, LLC  
11903 Black Road  
Knoxville, TN 37932  
(865) 850-1883  
www.ecoform.com

NSF International  
P.O. Box 130140, 789 N.Dixboro Road,  
Ann Arbor, MI 48105, USA  
www.nsf.org  
734 769 8010



**SUMMARY**  
Reference PCR  
SM Part B: Residential toilets, v3.0

Regions; system boundaries  
North America; Cradle-to-grave

Functional unit  
One single toilet in an average residential environment without an electronic bidet seat, over the estimated service life of the building

LCIA methodology; LCA software;  
LCI database  
TRACI 2.1; SimaPro Analyst 9.5; ecoinvent and USLCI databases

In accordance with ISO 14044 and the referenced PCR, the life cycle assessment was conducted by Sustainable Minds and critically reviewed by Jack Geibig (Ecoform) on behalf of NSF.

Public LCA  
LCA background report of TOTO Faucets, Flush Valves, and Residential Toilets, 2024

TOTO USA  
1155 Southern Road  
Morrow, GA 30260  
www.totousa.com

Contact us

## LCA results & interpretation

Ultramax®

Eco Ultramax® 1.28gpf

Ultramax II 1G®

**Ultramax® II 1.28gpf**

EPD additional content

Material health

### Scope and summary

- Cradle to gate  Cradle to gate with options  Cradle to grave

#### Functional unit

One single flush toilet in an average residential environment without an electronic bidet seat. The expected service life (ESL) of a building is 75 years, and all use stage activity and impacts are accounted for in that full ESL period. The reference service life (RSL) of the toilet is 20 years, which is an industry-accepted average lifespan based on the economic lifespan of the product.

#### Maintenance

Regular cleaning is assumed to use 1.69 fl oz (50mL) of a 1% sodium lauryl sulfate (SLS) solution twice per month for 75 years, which is the building estimated service life. The use of 50mL/clean over 24cleans/year for 75 years gives a total of 90L of solution. Using a density of 1.01kg/L for a 1% SLS solution, 90kg of solution will be needed over the course of 75 years. Therefore, 0.9kg of SLS plus 90kg of water were included in the model.

#### Repair and replacement

The trip lever handle, flapper seal, and fill valve seal are assumed to be replaced once during each 20-year RSL period as part of regular repairs. At the end of its RSL, the residential toilet is assumed to be replaced. Therefore, an additional 2.75 products are included as replacements, with all life cycle modules considered, over the building's ESL of 75 years.

#### Operational water use

The amount of water used by the toilet depends on its flush rate. The 1.28gpf toilet consumes 1.28 gallons per flush and is assumed to be used 13 times per day over 75 years, resulting in 455,520 gallons of water over its lifetime. An electricity factor of 0.000961 kWh per liter of water is used to represent energy for upstream municipal water collection, treatment, supply, and downstream management.

#### Manufacturing data

Manufacturing data has been collected and compiled for TOTO Thailand and Morrow. **Data reporting period:** 2023.

#### Material composition greater than 1% by weight

PART	MATERIAL	% WT.
Tank and bowl	Ceramic	80.2%
Packaging	Corrugated board, paper inserts	9.5%
Seat	Polypropylene	4.4%
Other	Fittings & tank components	5.9%

### What's causing the greatest impacts

#### All life cycle stages

The use stage [B1-B7] dominates the results for all impact categories. The replacements module [B4] is highly dominant in all categories because of the amount of water consumed during operation and the necessity to consider an additional 2.75 products as replacements. All life cycle modules are considered throughout the estimated service life (ESL) of the building, which is 75 years. The production stage [A1-A3] itself is slightly significant but does not dominate in any impact category. Additionally, the processes associated with dismantling the product and final waste treatment during the end-of-life stage do not have a significant impact.

#### Production stage [A1-A3]

The ceramic parts dominate all impact categories in the production stage except for eutrophication where corrugated board and brass parts also have major contributions. Injection molding and turning brass processes have significant contribution to the ozone depletion impact category while zinc parts have significant contribution to the non-carcinogenics. The other parts and processes contribute between 1% and 19% of the overall impacts in the remaining categories.

#### Construction stage [A4-A5]

Installation of the product dominates impacts in the construction stage.

Transportation by truck for delivery to the installation site contributes the most, and this stage contributes less than 1% of the total global warming potential impacts throughout the product's life cycle.

#### Use stage [B1-B7]

Product replacements dominate impacts in the use stage. The use stage itself dominates all impact categories (>96%) due to the consideration of an additional 2.75 products as replacements.

#### End-of-life stage [C1-C4]

The transportation to landfill dominates impacts in the end-of-life stage. Transportation and the processes for dismantling the product contribute to a relatively low portion (<1%) of total results for all impact categories.

#### How we're making it greener

TOTO PeoplePlanetWater™ programs improving environmental performance

- Dual-Max®, E-Max®, Tornado Flush™, 1G®, and EcoPower® reduce water consumption in the use phase
- Energy efficiency programs optimize the firing process
- Modular packing methods increase the fill rate of a trailer, cutting down on the number of trips needed
- 100% of post-industrial ceramic waste is recycled

[See how we make it greener](#)

### LCA results

LIFE CYCLE STAGE	PRODUCTION	CONSTRUCTION	USE	END OF LIFE
Information modules: Included (X)   Excluded (MND)*	(X) A1 Raw materials	(X) A4 Transportation/ Delivery	(X) B1 Use	(X) C1 Deconstruction/ Demolition
	(X) A2 Transportation	(X) A5 Construction/ Installation	(X) B2 Maintenance	(X) C2 Transportation
	(X) A3 Manufacturing		(X) B3 Repair	(X) C3 Waste processing
			(X) B4 Replacement	(X) C4 Disposal
			(X) B5 Refurbishment	
			(X) B6 Operational energy use	
			(X) B7 Operational water use	

### SM Single Score

Impacts per toilet	8.45 mPts	2.42 mPts	470 mPts	0.079 mPts
Materials or processes contributing >20% to total impacts in each life cycle stage	Ceramic parts production as well as well zinc and brass parts together with zinc turning process.	Transportation of the product to installation site or consumer and disposal of packaging.	Volume of water used during operation and the number of product replacements needed over the building's service life.	Transport to waste processing and disposal of material flows transported to a landfill.

### Ultramax® II 1.28gpf - TRACI v2.1 results per functional unit

LIFE CYCLE STAGE	PRODUCTION	CONSTRUCTION	USE	END OF LIFE	
- Ecological damage					
Impact category	Unit				
Global warming	kg CO <sub>2</sub> eq	1.03E+02	1.94E+01	6.32E+03	9.27E-01
Ozone depletion	kg CFC-11 eq	5.25E-06	1.31E-07	2.88E-04	1.16E-07
Acidification	kg SO <sub>2</sub> eq	3.52E-01	5.49E-01	3.27E+01	5.65E-03
Eutrophication	kg N eq	6.10E-02	3.58E-02	3.70E+00	4.59E-04
+ Human health damage					
+ Additional environmental information					

### References

#### LCA Background Report

LCA background report of TOTO Faucets, Flush Valves, and Residential Toilets, 2024; SimaPro Analyst 9.5; ecoinvent and USLCI databases; TRACI 2.1.

ISO 14025, "Sustainability in buildings and civil engineering works -- Core rules for environmental product declarations of construction products and services"

ISO 21930:2017, "Sustainability in Building Construction -- Environmental Declaration of Building Products" serves as the core PCR along with Sustainable Minds Part A.

#### SM Part A: LCA calculation rules and report requirements, version 2023

August, 2023. PCR review conducted by the Sustainable Minds TAB, tab@sustainableminds.com.

#### SM Part B: Residential toilets, v3.0

March, 2024. PCR review conducted by Jack Geibig, Chair (Ecoform) Jgeibig@ecoform.com; Hugues Imbeault-Tétreault, ing., M.Sc.A. (Groupe AGÉCO); Rebe Feraldi, LCACP, CLAR (Pacific Northwest National Laboratory).

#### Download PDF SM Transparency Report/EPD

SM Transparency Reports (TR) are ISO 14025 Type III environmental declarations (EPD) that enable purchasers and users to compare the potential environmental performance of products on a life cycle basis. They are designed to present information transparently to make the limitations of comparability more understandable. Environmental declarations of products that conform to the same PCR and include the same life cycle stages, but are made by different manufacturers, may not sufficiently align to support direct comparisons. They therefore cannot be used as comparative assertions unless the conditions as defined in ISO 14025 Section 6.7.2. 'Requirements for Comparability' are satisfied. In order to support comparative assertions, this EPD meets all comparability requirements stated in ISO 14025:2006. However, differences in certain assumptions, data quality, and variability between LCA data sets may still exist. Any EPD comparison must be carried out at the building level per ISO 21930 guidelines, use the same sub-category PCR where applicable, include all relevant information modules, be limited to EPDs applying a functional unit, and be based on equivalent scenarios with respect to the context of construction works. Some LCA impact categories and inventory items are still under development and can have high levels of uncertainty. To promote uniform guidance on the data collection, calculation, and reporting of results, the ACLCA methodology (ACLCA 2019) was used.

### Rating systems

The intent is to reward project teams for selecting products from manufacturers who have verified improved life-cycle environmental performance.

#### LEED BD+C: New Construction | v4 - LEED v4

Building product disclosure and optimization

#### Environmental product declarations

- Industry-wide (generic) EPD ½ product
- Product-specific Type III EPD 1 product

#### LEED BD+C: New Construction | v4.1 - LEED v4.1

Building product disclosure and optimization

#### Environmental product declarations

- Industry-wide (generic) EPD 1 product
- Product-specific Type III EPD 1.5 products

#### Collaborative for High Performance Schools National Criteria

##### MW C5.1 – Environmental Product Declarations

- Third-party certified type III EPD 2 points

#### Green Globes for New Construction and Sustainable Interiors

##### Materials and resources

- NC 3.5.1.2 Path B: Prescriptive Path for Building Core and Shell
- NC 3.5.2.2 and SI 4.1.2 Path B: Prescriptive Path for Interior Fit-outs

#### BREEAM New Construction 2018

Mat 02 - Environmental impacts from construction products

#### Environmental Product Declarations (EPD)

- Industry-average EPD .5 points
- Multi-product specific EPD .75 points
- Product-specific EPD 1 point

## SM Transparency Report (EPD)™ + Material Health Overview™

EPD	LCA
3rd-party reviewed	<input checked="" type="checkbox"/> NSF
Transparency Report (EPD)	
3rd-party verified	<input checked="" type="checkbox"/> NSF
Validity: 08/31/2024 – 08/30/2029 TOTO – 20240831 – 005	
MATERIAL HEALTH	Material evaluation
Self-declared	<input checked="" type="checkbox"/>

This environmental product declaration (EPD) was externally verified by Jack Geibig (Ecoform) on behalf of NSF according to ISO 14044; ISO 21930:2017; SM Part A: LCA calculation rules and report requirements, 2023; the reference PCR; and ISO 14025:2006.

**Ecoform, LLC**  
11903 Black Road  
Knoxville, TN 37932  
(865) 850-1883  
www.ecoform.com

**NSF International**  
P.O. Box 130140, 789 N.Dixboro Road,  
Ann Arbor, MI 48105, USA  
www.nsf.org  
734 769 8010



#### SUMMARY

Reference PCR  
SM Part B: Residential toilets, v3.0

Regions; system boundaries  
North America; Cradle-to-grave

#### Functional unit

One single toilet in an average residential environment without an electronic bidet seat, over the estimated service life of the building

LCA methodology; LCA software;  
LCI database

TRACI 2.1; SimaPro Analyst 9.5;  
ecoinvent and USLCI databases

In accordance with ISO 14044 and the referenced PCR, the life cycle assessment was conducted by Sustainable Minds and critically reviewed by Jack Geibig (Ecoform) on behalf of NSF.

#### Public LCA

LCA background report of TOTO Faucets, Flush Valves, and Residential Toilets, 2024

TOTO USA  
1155 Southern Road  
Morrow, GA 30260  
www.totousa.com

Contact us





disposed (kg)												
Non-hazardous waste disposed (kg)	2.99E+01	1.20E+00	1.43E+00	2.93E+01	1.19E+00	1.51E+02	0.00E+00	0.00E+00	5.40E-01	0.00E+00	3.80E+01	3.26E+01
High-level radioactive waste, conditioned, to final repository (kg)	4.32E-03	6.58E-04	4.05E-05	3.50E-04	0.00E+00	3.10E-01	8.83E-02	1.51E-02	1.62E-06	#NAME?	5.13E-06	5.02E-03
Intermediate- and low-level radioactive waste, conditioned, to final repository (kg)	2.45E-05	2.59E-07	1.34E-07	8.13E-07	0.00E+00	2.66E-03	8.55E-04	5.58E-05	1.55E-08	1.18E-09	2.67E-08	2.49E-05
Components for re-use (kg)	0	0	0	0	0	0	0	0	0	0	0	0
Materials for recycling (kg)	0	0	0	2.93E+01	0.00E+00	7.65E+01	0.00E+00	0.00E+00	7.25E+00	7.25E+00	7.25E+00	0.00E+00
Materials for energy recovery (kg)	0	0	0	0	0	0	0	0	0	0	0	0
Exported energy (MJ, LHV)	0	0	0	0	0	0	0	0	0	0	0	0
Carbon emissions and removals												
Biogenic Carbon Removal from Product (kg CO2)	0	0	0	0	0	0	0	0	0	0	0	0
Biogenic Carbon Emission from Product (kg CO2)	0	0	0	0.00E+00	0.00E+00	0.00E+00	0	0	0	0	0	0
Biogenic Carbon Removal from Packaging (kg CO2)	4.49E+00	0	0	0.00E+00	0	6.74E+00	0	0	0	0	0	4.49E+00
Biogenic Carbon Emission from Packaging (kg CO2)	0	0	4.49E+00	0.00E+00	0	6.74E+00	0	0	0	0	0	4.49E+00
Biogenic Carbon Emission from Combustion of Waste from Renewable Sources Used in Production Processes (kg CO2)	0	0	0	0	0	0	0	0	0	0	0	0
Calcination Carbon Emissions (kg CO2)	0	0	0	0.00E+00	0	0.00E+00	0	0	0	0	0	0
Carbonation Carbon Removals (kg CO2)	0	0	0	0	0	0	0	0	0	0	0	0
Carbon Emissions from Combustion of Waste from Renewable and Non-Renewable Sources used in Production Processes (kg CO2)	0	0	0	0	0	0	0	0	0	0	0	0



## SM Transparency Report (EPD)™ + Material Health Overview™

### EPD

LCA

3rd-party reviewed



Transparency Report (EPD)

3rd-party verified



Validity: 08/31/2024 – 08/30/2029  
TOTO – 20240831 – 005

### MATERIAL HEALTH

Material evaluation

Self-declared



This environmental product declaration (EPD) was externally verified by Jack Geibig (Ecoform) on behalf of NSF according to ISO 14044; ISO 21930:2017; SM Part A: LCA calculation rules and report requirements, 2023; the reference PCR; and ISO 14025:2006.

**Ecoform, LLC**  
11903 Black Road  
Knoxville, TN 37932  
(865) 850-1883  
www.ecoform.com

**NSF International**  
P.O Box 130140, 789 N.Dixboro Road,  
Ann Arbor, MI 48105, USA  
www.nsf.org  
734 769 8010



**Certified Environmental Product Declaration**  
www.nsf.org

### SUMMARY

**Reference PCR**  
SM Part B: Residential toilets, v3.0

**Regions; system boundaries**  
North America; Cradle-to-grave

**Functional unit**  
One single toilet in an average residential environment without an electronic bidet seat, over the estimated service life of the building

**LCIA methodology; LCA software; LCI database**  
TRACI 2.1; SimaPro Analyst 9.5; ecoinvent and USLCI databases

In accordance with ISO 14044 and the referenced PCR, the life cycle assessment was conducted by Sustainable Minds and critically reviewed by Jack Geibig (Ecoform) on behalf of NSF.

### Public LCA

LCA background report of TOTO Faucets, Flush Valves, and Residential Toilets, 2024

### TOTO USA

1155 Southern Road  
Morrow, GA 30260  
www.totousa.com

Contact us

# LCA & material health results & interpretation

Ultramax®

Eco Ultramax® 1.28gpf

Ultramax II 1G®

Ultramax® II 1.28gpf

EPD additional content

Material health

## Evaluation programs

### Declare

**Declare labels are issued to products disclosing ingredient inventory, sourcing, and end of life options.** Declare labels are based on the Manufacturers Guide to Declare, administered by the International Living Future Institute.

### How it works

Material ingredients are inventoried and screened against the **Living Building Challenge (LBC) Red List** which represents the 'worst in class' materials, chemicals, and elements known to pose serious risks to human health and the greater ecosystem.

The Declare product database and label are used to select products that meet the Living Building Challenge's stringent materials requirements, streamlining the materials specification and certification process.

## Assessment scope and results

### Declare™

Inventory threshold: 100 ppm

#### Declare level:

The Declare product database and label are used to select products that meet the LBC's stringent materials requirements, streamlining the materials specification and certification process.

- LBC Red List Free <sup>?</sup>
- LBC Red List Approved <sup>?</sup>
- Declared <sup>?</sup>

Click the label to see the full declaration.

#### ● Eco Ultramax

#### ● Ultramax II

#### ● Ultramax II 1G



## What's in this product and why

### Declare level

'Declared' is awarded to products when all the ingredients have been self-disclosed to promote transparency.

### What's in the product and why

**Manufacturing in the United States means that robust human labor, safety and environmental rules and regulations were followed.** In addition, local sourcing of raw materials means that less smog and air pollution are generated as a result of transport. The ceramic body and glaze makes up ~92-93% of the total mass of the toilet. Therefore, manufacturing and transportation of the ceramic create the greatest human health impacts when compared to the overall manufacture of the entire toilet. By specifying an Ultramax toilet manufactured in the United States, the consumer helps mitigate these human health impacts.

### Red List materials

**The toilet trip lever handle is plated with chrome (Hexavalent Chromium VI).** Chromium material is used as a decorative finish in applications where corrosion-resistance and durability are required. During the chrome plating process health hazards have been identified and are managed according to the OSHA Guidelines. Process controls are used to protect the environment and the production workers wear personal protection equipment. After the plating process the chrome surface is inert and does not pose any health risks. The trip lever in the final form does not represent any hazards to the user.

**TOTO continues to investigate alternative finishes in order to reduce and/or eliminate Chromium VI on the toilet trip levers.** Standard versions of the Ultramax use parts containing PVC (Polyvinyl Chloride), a plastic commonly used within the plumbing industry. The primary health concern is during the production process when the raw material components are in a powder or pelletized form. If inhaled or ingested the results can be toxic and potentially carcinogenic. In the final form, materials are inert and not a hazard to the users of the toilet.

**As part of TOTO's efforts to reduce health impacts, PVC-free versions of the Ultramax are available.** PVC parts have been removed and replaced with materials of compatible functional strength and chemical resistance. These alternative parts are sourced within the continental United States. It should be noted that there are no legislative or regulatory mandates to remove this material from a product, however, as part of our goal to mitigate adverse health impacts, TOTO has decided to move beyond compliance by voluntarily eliminating this compound.

### Where it goes at the end of its life

TOTO encourages consumers to recycle their used toilet and toilet parts. Contact your local municipality for recycling programs.

## How we're making it healthier

### Goals and plans for improvement

- Utilize alternative materials to PVC, removing this compound from tank parts in all TOTO models.
- With no compromise to beauty, functionality or durability, TOTO intends to offer alternative finishes for trip levers that do not require Chromium VI.

[See how we make it greener](#)

## References

### Declare

- TOTO USA, Declare label for Eco Ultramax MS854114E
- TOTO USA, Declare label for Ultramax II MS604114CEFG
- TOTO USA, Declare label for Ultramax II 1G® MS604114CUFG

### Manufacturer's Guide to Declare

A comprehensive guide providing information about the program, the assessment methodology, how to submit material data to obtain a Declare label and how they are used to meet the Health & Happiness and Materials Petals of the Living Building Challenge.

## Rating systems

### LEED BD+C: New Construction | v4 - LEED v4

Building product disclosure and optimization

#### Material Ingredients

Credit value options 1 product each

1. Reporting  2. Optimization  3. Supply Chain Optimization

### LEED BD+C: New Construction | v4.1 - LEED v4.1

Materials and resources

#### Material Ingredients

Credit value options 1 product each

1. Reporting  2. Optimization  3. Supply Chain Optimization

### Living Building Challenge

#### Materials petals imperatives

10. Red List Free  12. Responsible Industry  13. Living Economy Sourcing

### WELL Building Standard®

#### Air and Mind Features

- X07 Materials Transparency

- X08 Materials Optimization

### Collaborative for High Performance Schools National Criteria

#### EQ C7.1 Material Health Disclosures

- Performance Approach 2 points

- Prescriptive Approach 2 points

## SM Transparency Report (EPD)™ + Material Health Overview™

EPD LCA

3rd-party reviewed  <sup>NSF</sup>

Transparency Report (EPD)

3rd-party verified  <sup>NSF</sup>

Validity: 08/31/2024 – 08/30/2029  
TOTO – 20240831 – 005

MATERIAL HEALTH Material evaluation

Self-declared

**This environmental product declaration (EPD) was externally verified by Jack Geibig (Ecoform) on behalf of NSF according to ISO 14044; ISO 21930:2017; SM Part A: LCA calculation rules and report requirements, 2023; the reference PCR; and ISO 14025:2006.**

**Ecoform, LLC**  
11903 Black Road  
Knoxville, TN 37932  
(865) 850-1883  
www.ecoform.com

**NSF International**  
P.O. Box 130140, 789 N. Dixboro Road,  
Ann Arbor, MI 48105, USA  
www.nsf.org  
734 769 8010



### SUMMARY

**Reference PCR**  
SM Part B: Residential toilets, v3.0

**Regions; system boundaries**  
North America; Cradle-to-grave

**Functional unit**  
One single toilet in an average residential environment without an electronic bidet seat, over the estimated service life of the building

**LCIA methodology; LCA software; LCI database**  
TRACI 2.1; SimaPro Analyst 9.5; ecoinvent and USLCI databases

In accordance with ISO 14044 and the referenced PCR, the life cycle assessment was conducted by Sustainable Minds and critically reviewed by Jack Geibig (Ecoform) on behalf of NSF.

**Public LCA**  
LCA background report of TOTO  
Faucets, Flush Valves, and Residential Toilets, 2024

**TOTO USA**  
1155 Southern Road  
Morrow, GA 30260  
www.totousa.com

Contact us

## How we make it greener


Ultramax®

Expand all

### PRODUCTION




↓ **15%**  
Less Natural Gas

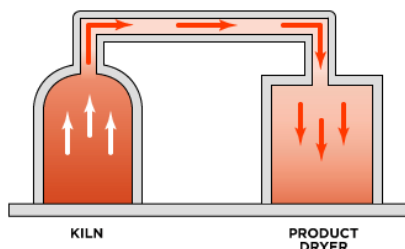

Waste heat from the kilns is routed to the product dryer. This reduces 15% natural gas consumption.



TOTO is taking additional steps at its other facilities, outside of Vietnam, Indonesia, and India, to reduce potential environmental impacts. For example, TOTO's Morrow plant matches 100% of its electricity usage through [Georgia Power Simple Solar](#) and helps grow solar energy. 14 million kilowatt hours of green energy helps reduce 18.5 million pounds of carbon dioxide equivalents each year.

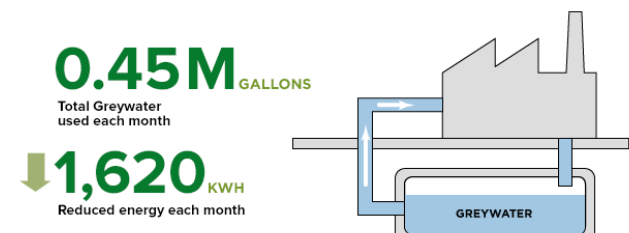

In another example of TOTO's energy savings outside of Vietnam and Indonesia, 0.45 million gallons per month of greywater is used in [TOTO Morrow's operations](#). 1,620 of kWh in energy per month is reduced due to less potable water.



65% of all cardboard used is 100% recycled content.

### CONSTRUCTION




= **INCREASES** = ↓ **50%**  
Fill rate of a trailer      Reduced transportation cost

One-piece toilets are shipped with every other toilet upside down, increasing the fill rate of a truck trailer and cutting transportation cost in half.




UPS parcel shipments are carbon neutral. TOTO is a registered SmartWay® Transport Partner.

### USE

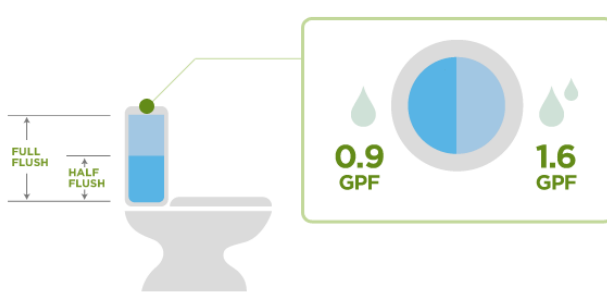

The dual flush system reduces water in the use phase.

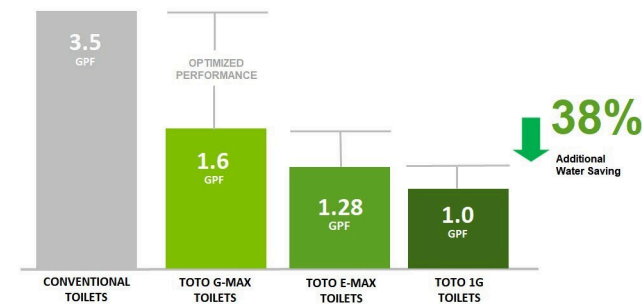

Utilizing the same proven engineering as our legendary 1.6 GPF G-Max flushing system, the 1.28 GPF E-Max and 1.0 GPF ultra-low flushing systems, such as Tornado Flush™ and Siphon Jet Flush, reinforce TOTO's performance reputation while offering an additional water savings of 20% and 38% respectively.

## SM Transparency Report (EPD)™ + Material Health Overview™

EPD	LCA
3rd-party reviewed	NSF
Transparency Report (EPD)	
3rd-party verified	NSF
Validity: 08/31/2024 – 08/30/2029 TOTO – 20240831 – 005	
MATERIAL HEALTH	Material evaluation
Self-declared	NSF

This environmental product declaration (EPD) was externally verified by Jack Geibig (Ecoform) on behalf of NSF according to ISO 14044; ISO 21930:2017; SM Part A: LCA calculation rules and report requirements, 2023; the reference PCR; and ISO 14025:2006.

Ecoform, LLC  
11903 Black Road  
Knoxville, TN 37932  
(865) 850-1883  
www.ecoform.com

NSF International  
P.O. Box 130140, 789 N. Dixboro Road,  
Ann Arbor, MI 48105, USA  
www.nsf.org  
734 769 8010



### SUMMARY

Reference PCR  
SM Part B: Residential toilets, v3.0

Regions; system boundaries  
North America; Cradle-to-grave

Functional unit  
One single toilet in an average residential environment without an electronic bidet seat, over the estimated service life of the building

LCIA methodology; LCA software;  
LCI database  
TRACI 2.1; SimaPro Analyst 9.5; ecoinvent and USLCI databases

In accordance with ISO 14044 and the referenced PCR, the life cycle assessment was conducted by Sustainable Minds and critically reviewed by Jack Geibig (Ecoform) on behalf of NSF.

### Public LCA

LCA background report of TOTO  
Faucets, Flush Valves, and Residential Toilets, 2024

TOTO USA  
1155 Southern Road  
Morrow, GA 30260  
www.totousa.com

Contact us